

GANGED, BACK-TO-BACK DWV DETAIL FOR SHALLOW WALL

Accessories

367.485.16.1 HDPE
back-to-back
horizontal waste fitting




367.923.16.1 HDPE
back-to-back vertical
waste fitting



MINIMUM DISTANCE BETWEEN FINISHED WALLS:

Typical for installations with 4" pipe horizontal run and 2x6 carrier -> 11"

Typical for installations with 4" pipe horizontal run and 2x4 carrier -> 8-5/8"

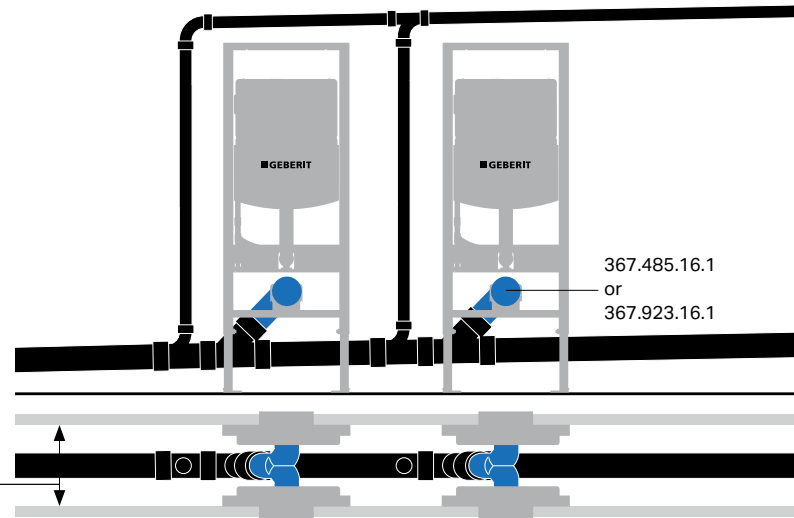

GANGED, BACK-TO-BACK DWV DETAIL

Accessories

366.061.16.1 HDPE
waste elbow (included)




367.072.18.1 Cast iron
elbow with 2" heel outlet



MINIMUM DISTANCE BETWEEN FINISHED WALLS:

Typical for installations with 4" pipe horizontal run -> as per fitting choice and layout

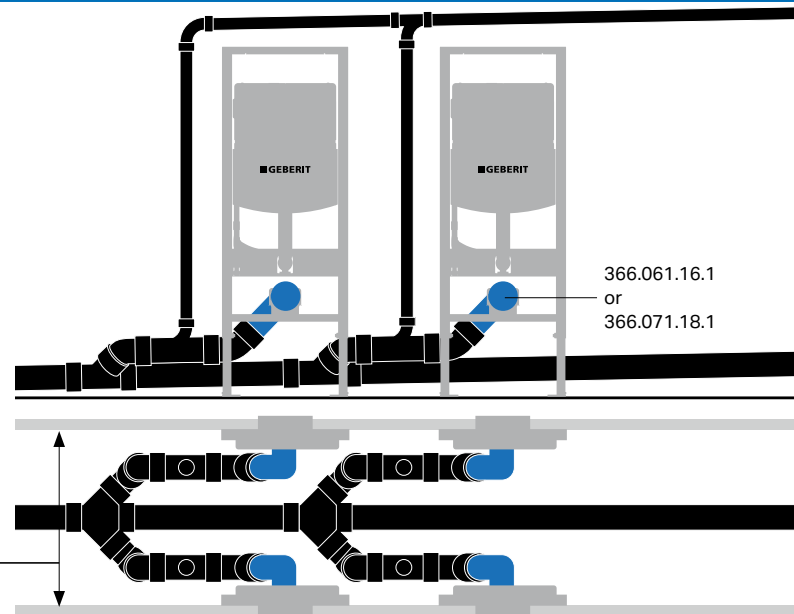

GANGED DWV ALTERNATE VENTING DETAIL

Accessories

367.072.18.1 Cast iron
elbow with 2" heel outlet

