


SITE SIZABLE (S) STAINLESS STEEL CHANNEL

Installation



For an exact wall-to-wall installation. The channel and grate length can be cut on-site, and the drain outlet can be located anywhere along the channel run. Available in kit lengths or sold as individual components.

Waterproofing via clamping floor drain:


- Copper Pan
 - Hot Mop
 - PVC Liner
- Fiberglass
 - Lead Pan
 - Rubber Liner (Chloraloy®)




Clamping floor drain sold separately (Except 99 Series)

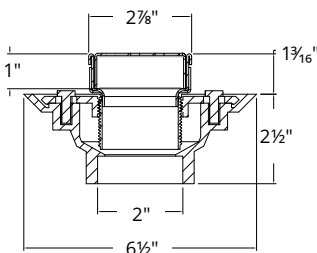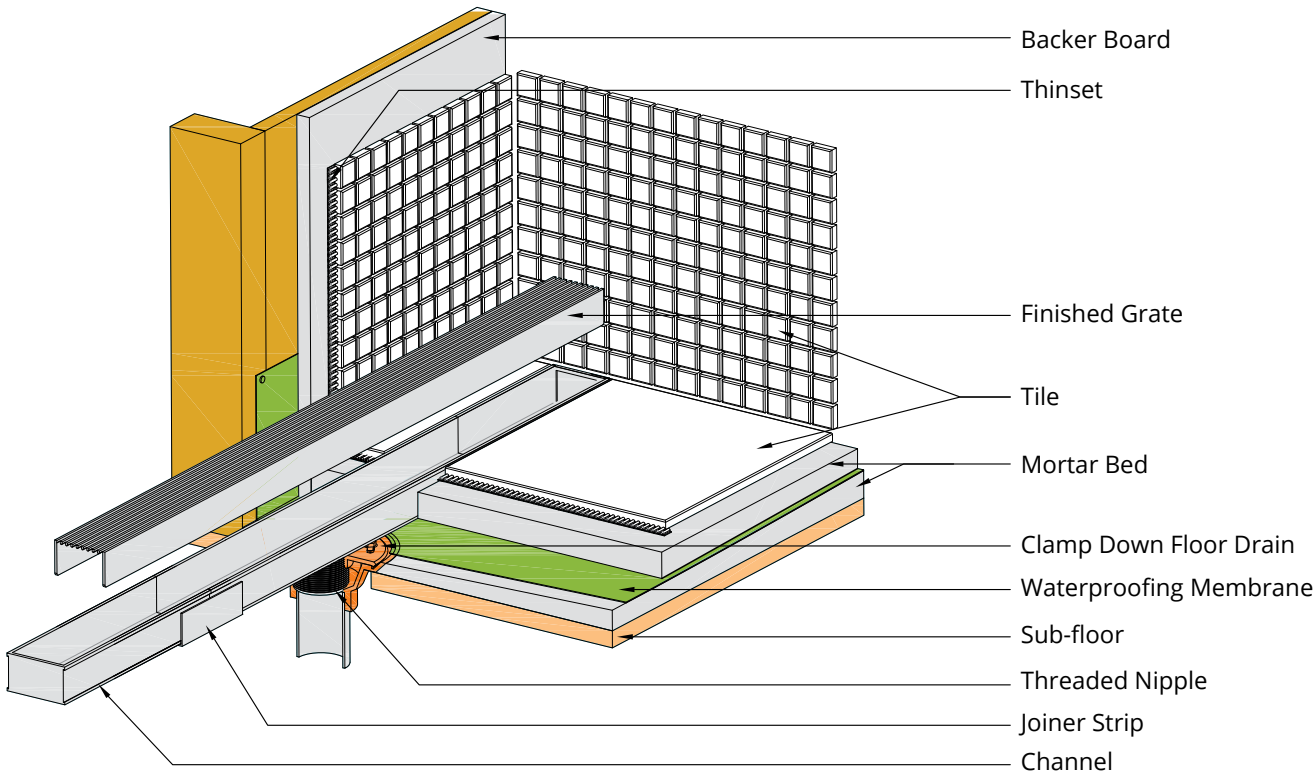


S-DGAS 65, S-AS 65

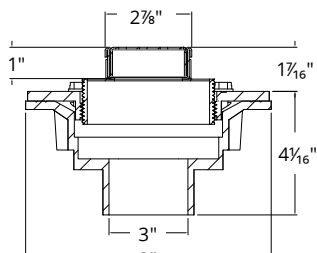

S-DGAS 99, S-AS 99





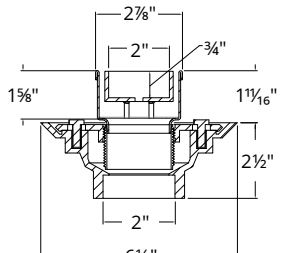


S-TIFAS 65

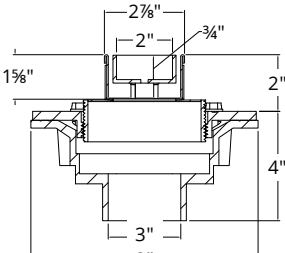

S-TIFAS 99

SITE SIZABLE (S) STAINLESS STEEL CHANNEL

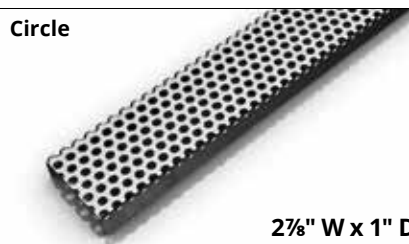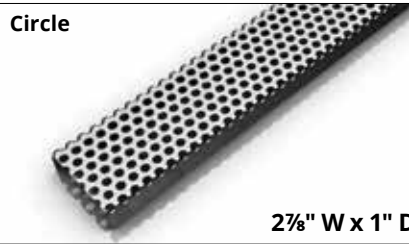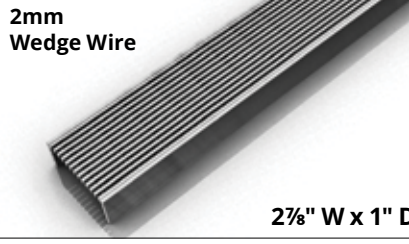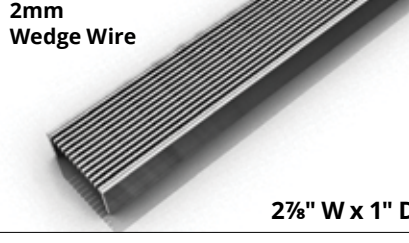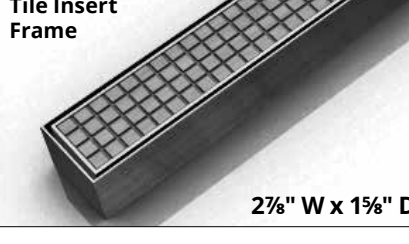	Series	Kit Length	SKU	Finish Options	GPM
 2 7/8" W x 1" D	S-DGAS 65 Grate: 16 gauge, 304 stainless steel	36"	S-DGAS 6536	Satin Stainless (SS) Polished Stainless (PS)	9 GPM per outlet
		48"	S-DGAS 6548		
		60"	S-DGAS 6560		
		72"	S-DGAS 6572		
		96"	S-DGAS 6596		
 2 7/8" W x 1" D	S-DGAS 99 High Flow Grate: 16 gauge, 304 stainless steel	36"	S-DGAS 9936	Satin Stainless (SS) Polished Stainless (PS)	21 GPM per outlet
		48"	S-DGAS 9948		
		60"	S-DGAS 9960		
		72"	S-DGAS 9972		
		96"	S-DGAS 9996		
 2 7/8" W x 1" D	S-AS 65 Grate: 12 gauge, 316 stainless steel	36"	S-AS 6536	Satin Stainless (SS) Polished Stainless (PS)	9 GPM per outlet
		48"	S-AS 6548		
		60"	S-AS 6560		
		72"	S-AS 6572		
		96"	S-AS 6596		
 2 7/8" W x 1" D	S-AS 99 High Flow Grate: 12 gauge, 316 stainless steel	36"	S-AS 9936	Satin Stainless (SS) Polished Stainless (PS)	21 GPM per outlet
		48"	S-AS 9948		
		60"	S-AS 9960		
		72"	S-AS 9972		
		96"	S-AS 9996		
 2 7/8" W x 1 5/8" D	S-TIFAS 65 Grate: 12 gauge, 316 stainless steel	40"	S-TIFAS 6540	Satin Stainless (SS) Polished Stainless (PS)	9 GPM per outlet
		48"	S-TIFAS 6548		
		60"	S-TIFAS 6560		
		80"	S-TIFAS 6580		
		96"	S-TIFAS 6596		
 2 7/8" W x 1 5/8" D	S-TIFAS 99 High Flow Grate: 12 gauge, 316 stainless steel	40"	S-TIFAS 9940	Satin Stainless (SS) Polished Stainless (PS)	21 GPM per outlet
		48"	S-TIFAS 9948		
		60"	S-TIFAS 9960		
		80"	S-TIFAS 9980		
		96"	S-TIFAS 9996		