



GAS (STL-G)

Streamline® STL-G Carbon Steel Press Fittings are designed for use in gas and fuel/oil piping systems utilizing Schedule 10 & Schedule 40 carbon steel pipe.

Carbon Steel Fitting Body With:

- Corrosion-resistant zinc-nickel coating
- HNBR engineered sealing element
- 420 stainless steel grip ring
- CuZn15 brass separator ring

Certifications:

- ANSI LC 4a/CSA 6.32a

Complies With:

- ASME B31: Code for Pressure Piping
- (UMC) Uniform Mechanical Code
- (UPC) Uniform Plumbing Code
- (IMC) International Mechanical Code
- (IPC) International Plumbing Code
- (IFGC) International Fuel Gas Code
- NFPA 54 and 58

Operating Parameters:

- Operating Pressure:
 - 125 PSI Max for fuel gas applications
 - 200 PSI Max for other approved applications
- Test Pressure: 600 PSI Max
- Temperature Range: -40°F to 180°F

Approved Systems:

- Natural Gas (up to 125 PSI)
- Propane (up to 125 PSI)
- Mineral Oil (up to 200 PSI)
- Compressed Air (up to 200 PSI)
- Nitrogen (up to 200 PSI)
- Heating Fuel Oil (up to 125psi)



15-Year Limited Warranty for approved mechanical applications*


*Approved applications includes non-industrial & non-marine applications.

CS
CARBON
STEEL

PR
PRESS


G
GAS

ADAPTER • FEMALE • REDUCING P X FPT

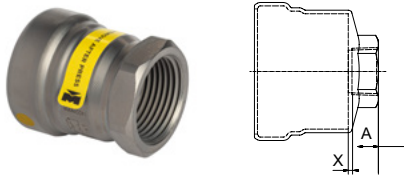


Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					A	X
CP01247G	3/4" x 1/2"	0.201	10	80	0.50	0.00
CP01265G	1" x 1/2"	0.282	10	50	0.54	0.02
CP01264G	1" x 3/4"	0.309	5	40	0.55	0.00
CP01268G	1 1/4" x 1/2"	0.474	1	30	0.54	0.02
CP01269G	1 1/4" x 3/4"	0.492	1	30	0.56	0.04
CP01272G	1 1/4" x 1"	0.476	1	15	0.66	0.01
CP01276G	1 1/2" x 1/2"	0.571	1	13	0.54	0.11

ADAPTER • FEMALE • REDUCING (CONT'D) P X FPT

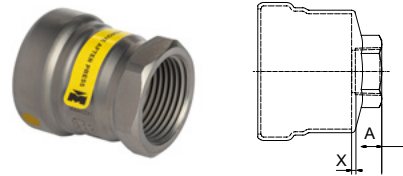


Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					A	X
CP01277G	1 1/2" x 3/4"	0.582	1	25	0.56	0.09
CP11279G	1 1/2" x 1"	0.620	1	25	0.66	0.06
CP01280G	1 1/2" x 1 1/4"	0.626	1	25	0.68	0.04
CP01283G	2" x 1/2"	0.750	1	20	0.54	0.09
CP01284G	2" x 3/4"	0.758	1	20	0.56	0.07
CP01285G	2" x 1"	0.721	1	20	0.63	0.00
CP01286G	2" x 1 1/4"	0.752	1	20	0.68	0.03
CP01288G	2" x 1 1/2"	0.701	1	20	0.68	0.03

CAP P

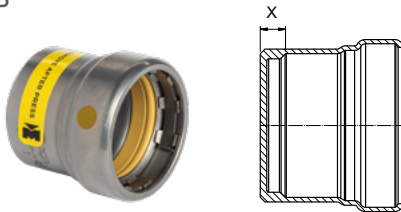


Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					X	
CP07007G	1/2"	0.124	10	120	0.23	
CP07009G	3/4"	0.185	10	80	0.28	
CP07011G	1"	0.284	5	80	0.32	
CP07012G	1 1/4"	0.434	1	30	0.33	
CP07013G	1 1/2"	0.545	1	25	0.33	
CP07014G	2"	0.697	1	20	0.40	

COUPLING • NO STOP P X P

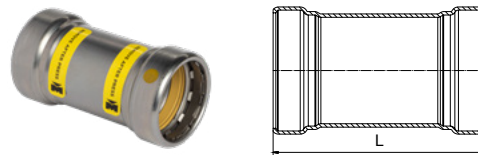


Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					L	
CP01903G	1/2"	0.218	10	100	2.79	
CP01905G	3/4"	0.298	10	70	3.01	
CP01906G	1"	0.439	5	40	3.37	
CP01907G	1 1/4"	0.725	1	20	4.34	
CP01908G	1 1/2"	0.858	1	17	4.60	
CP01909G	2"	1.014	1	12	4.86	

COUPLING • STAKED STOP P X P

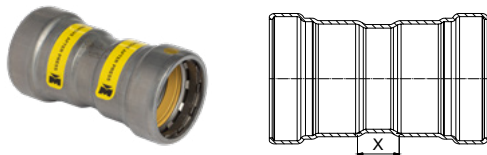

Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					X	
CP10145G	1/2"	0.221	10	50	0.52	
CP10146G	3/4"	0.300	10	70	0.54	
CP10147G	1"	0.454	5	40	0.59	
CP10148G	1 1/4"	0.745	1	20	0.62	
CP10149G	1 1/2"	0.871	1	15	0.67	
CP10150G	2"	1.058	1	12	0.84	

COUPLING • NO STOP • EXTENDED P X P

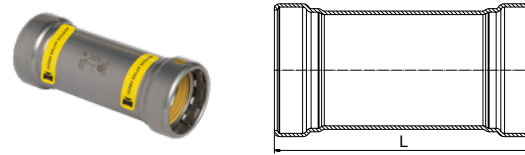

Item No.	Diameter	Catalog Wt.	Inner	Master	Dimensions (in.)	
					L	
CP01950G	1/2"	0.280	10	40	3.84	
CP01952G	3/4"	0.381	10	30	4.04	
CP01955G	1"	0.564	5	15	4.43	
CP01956G	1 1/4"	0.873	1	20	5.35	
CP01957G	1 1/2"	0.983	1	8	5.47	
CP01958G	2"	1.157	1	6	5.67	

CS
CARBON
STEEL

PR
PRESS

G
GAS