


PureFlow Crimp



3.2

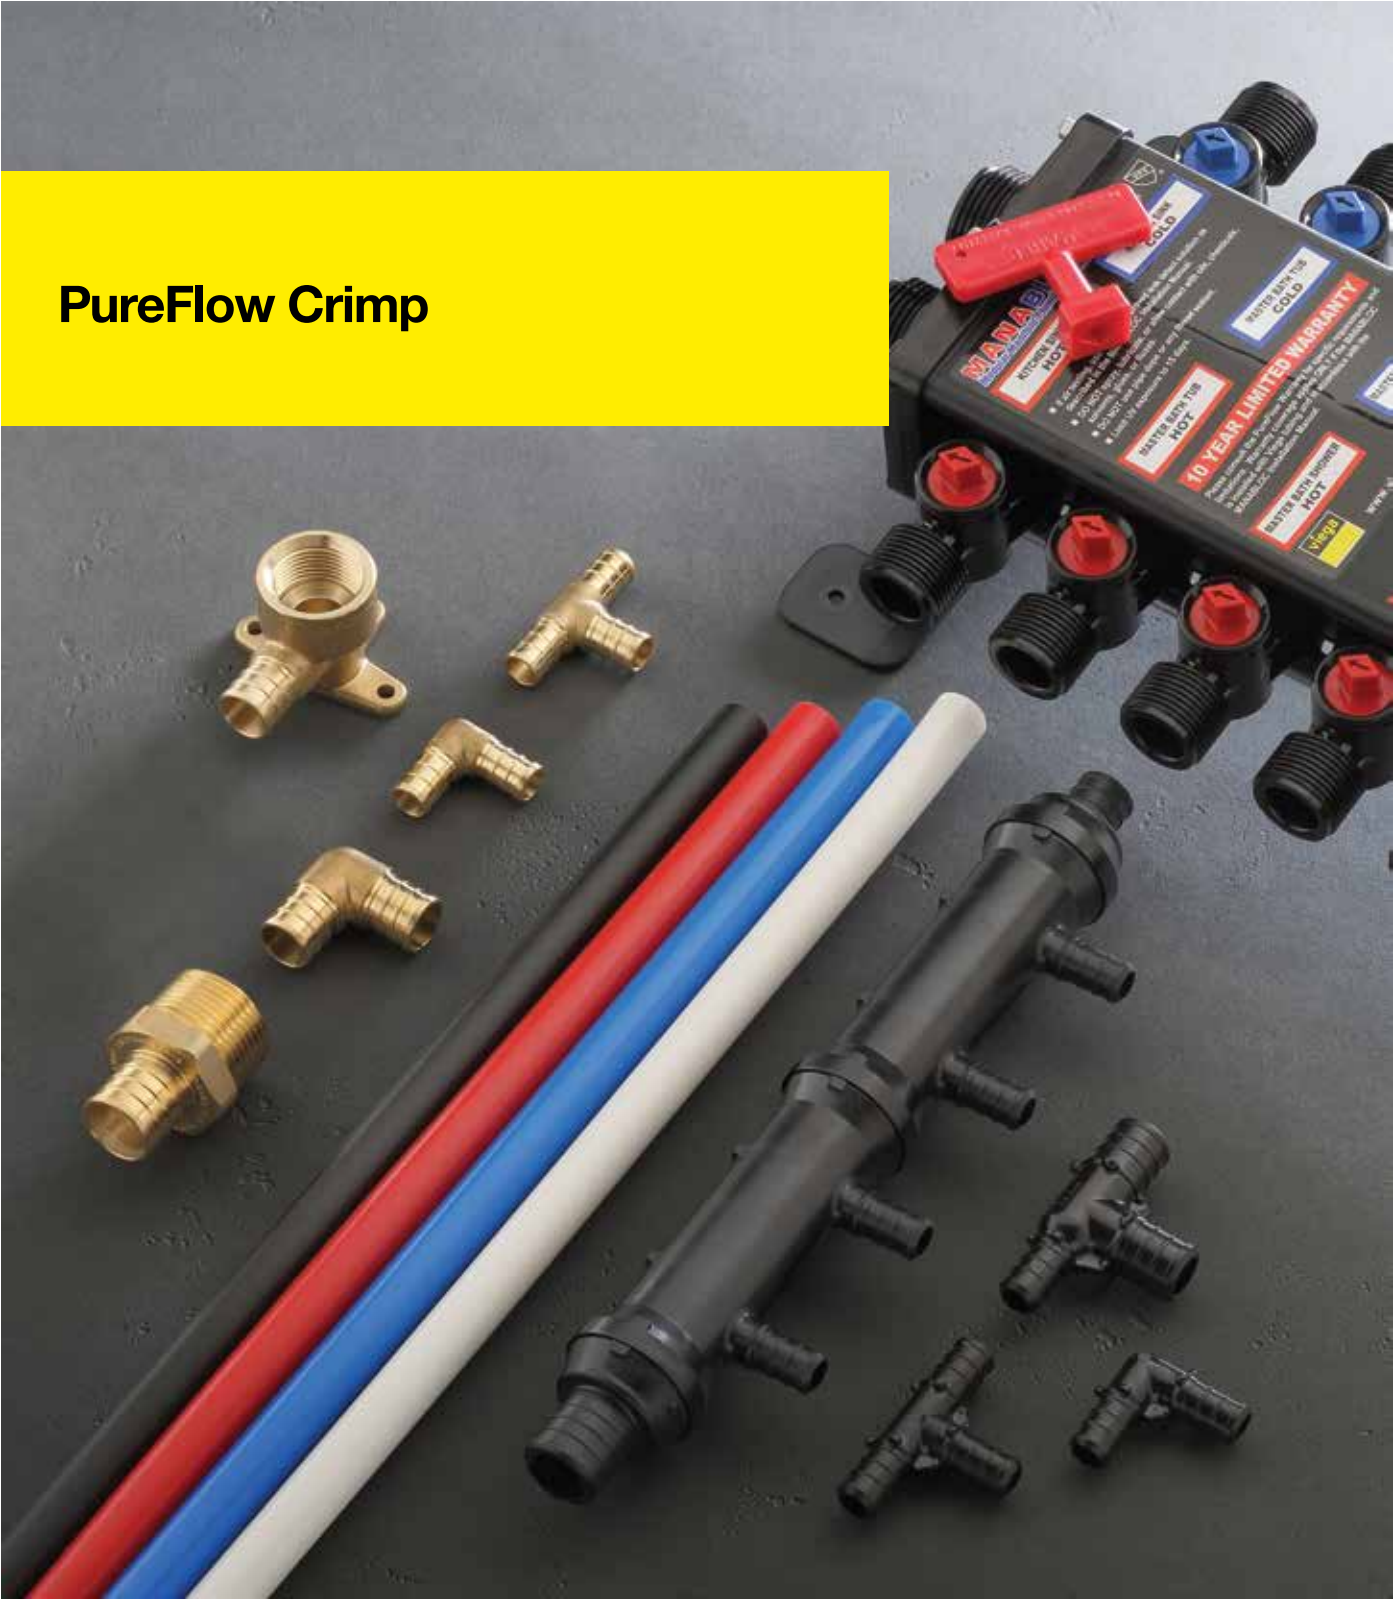

PureFlow Crimp

With the reliability and quality required for potable water, Viega PureFlow Crimp fittings are part of Viega's complete plumbing solution. Matched with the revolutionary Viega ManaBloc water distribution system and the highest-rated PEX tubing in the industry (according to industry standards), Viega PureFlow Crimp fittings are a time-tested method for joining PEX.

FEATURES AND BENEFITS

- EcoBrass fittings provide better corrosion resistance than other brass fittings
- High-performance polyalloy fittings are made in the USA
- Peace of mind from durable materials and quality manufacturing
- Available in sizes 3/8" to 1"
- 25-year limited warranty

CODES AND STANDARDS

- CSA B214: Installation Code for Hydronic Heating Systems
- IAPMO: California Plumbing Code (CPC)
- IAPMO: National Standard Plumbing Code (NSPC)
- IAPMO: Uniform Mechanical Code (UMC)
- IAPMO: Uniform Plumbing Code (UPC)
- IAPMO: Uniform Solar, Hydronics and Geothermal Code (USHGC)
- ICC: International Mechanical Code (IMC)
- ICC: International Plumbing Code (IPC)
- ICC: International Residential Code (IRC)
- National Building Code of Canada (NBCC)
- National Plumbing Code of Canada (NPCC)

LISTINGS AND CERTIFICATIONS

- ASTM E84: Standard Test Method for Surface Burning Characteristics of Building Materials
- ASTM F876: Standard Specification for Cross-linked Polyethylene (PEX) Tubing
- ASTM F877: Standard Specification for Cross-linked Polyethylene (PEX) Water Distribution System
- ASTM F1807/F2159: Standard Specification for Cross-linked Polyethylene (PEX) Insert Fittings
- ASTM F2023: Standard Test Method for Evaluating the Oxidative Resistance of Cross-linked Polyethylene PEX Tubing and Systems to Hot Chlorinated Water
- AWWA C904: Cross-linked Polyethylene (PEX) Pressure Pipe for Water Service
- CAN/ULC S101: Standard Method of Test for Surface Burning Characteristics
- CAN/ULC S102.2: Standard Method of Test for Surface Burning Characteristics of Flooring, Floor Coverings, and Miscellaneous Materials and Assemblies
- CSA B137.5: Standard Specification for PEX Tubing Systems in Pressure Applications
- HUD MR1276: Housing and Urban Development Materials Release
- IAPMO file 3700 (Potable Water Distribution Manifold)
- IAPMO file 4030 Cross-linked Polyethylene Water Distribution System (PEX)
- IAPMO file 4874 (FostaPEX)
- ICC-ES PMG-1038 (PureFlow)
- NSF/ANSI 14: Plastics Piping System Components and Related Materials
- NSF/ANSI/CAN 61: Drinking Water Systems Components – Health Effects

- NSF/ANSI 372: Drinking Water Systems Components – Lead Content
- UL 1821: Thermoplastic Sprinkler Pipe and Fittings for Fire Protection Service
- UL 2846: Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics

ZERO LEAD

References to Zero Lead throughout this publication mean products meet the requirements of both NSF/ANSI 372 ($\leq 0.25\%$ maximum weighted average lead content) and NSF/ANSI/CAN 61.

NOTE

Crimp rings are not sold with any PureFlow Crimp product unless otherwise specified.



**Viega PureFlow Crimp adapter
Zero Lead**
- Brass
- Crimp connection, polybutylene (PB)
connection

Note
Use Viega PureFlow Crimp ring
model V5019.9 for PB connection
Ring not included

Model V5017ZL

Crimp	PB	Wt [lb]	Quantity	Part No	DG
3/8	3/8	0.023	100	46620	2
1/2	1/2	0.031	100	46630	2
3/4	3/4	0.056	50	46641	2
1	1	0.083	10	46650	2



**Viega PureFlow Crimp adapter
Zero Lead**
- Brass
- Crimp connection, polyethylene (PE)
connection

Note
Use standard stainless steel hose clamp for
PE connection (not included)

Model V5047ZL

Crimp	PE	Wt [lb]	Quantity	Part No	DG
3/4	3/4	0.111	25	46145	2
1	1	0.166	10	46156	2



**Viega PureFlow Crimp adapter
Zero Lead**
- Brass
- Crimp connection, female copper tube size

Model V5045ZL

Crimp	C	Wt [lb]	Quantity	Part No	DG
1/2	1/2	0.035	50	46635	2
3/4	3/4	0.082	25	46645	2
1	1	0.108	10	40655¹⁾	2

¹⁾ copper



**Viega PureFlow Crimp adapter
Zero Lead**
- Brass
- Crimp connection, street

Model V5046ZL

Crimp	FTG (CTS)	Wt [lb]	Quantity	Part No	DG
1/2	1/2	0.038	50	46633	2
3/4	3/4	0.067	25	46644	2
1	1	0.103	10	60651¹⁾	2

FTG (CTS) = TEST

¹⁾ copper



**Viega PureFlow Crimp adapter
Zero Lead**
- Brass
- Crimp connection, female copper tube size,
street

Note
Copper connection can be used as either
male or female connection.

Model V5024ZL

Crimp	C	FTG (CTS)	Wt [lb]	Quantity	Part No	DG
3/8	3/8	1/2	0.036	50	46622	2
1	3/4	1	0.184	10	46654	2

FTG (CTS) = TEST

Couplings



**Viega PureFlow Crimp coupling
Zero Lead**
- Brass
- Crimp connection

Model V5015ZL

Crimp1	Crimp2	Wt [lb]	Quantity	Part No	DG
3/8	3/8	0.020	100	46422	2
1/2	3/8	0.025	100	46432	2
1/2	1/2	0.026	100	46434	2
3/4	1/2	0.044	50	46441	2
3/4	3/4	0.047	50	46444	2
1	3/4	0.074	10	46454	2
1	1	0.082	10	46455	2