


PureFlow Crimp

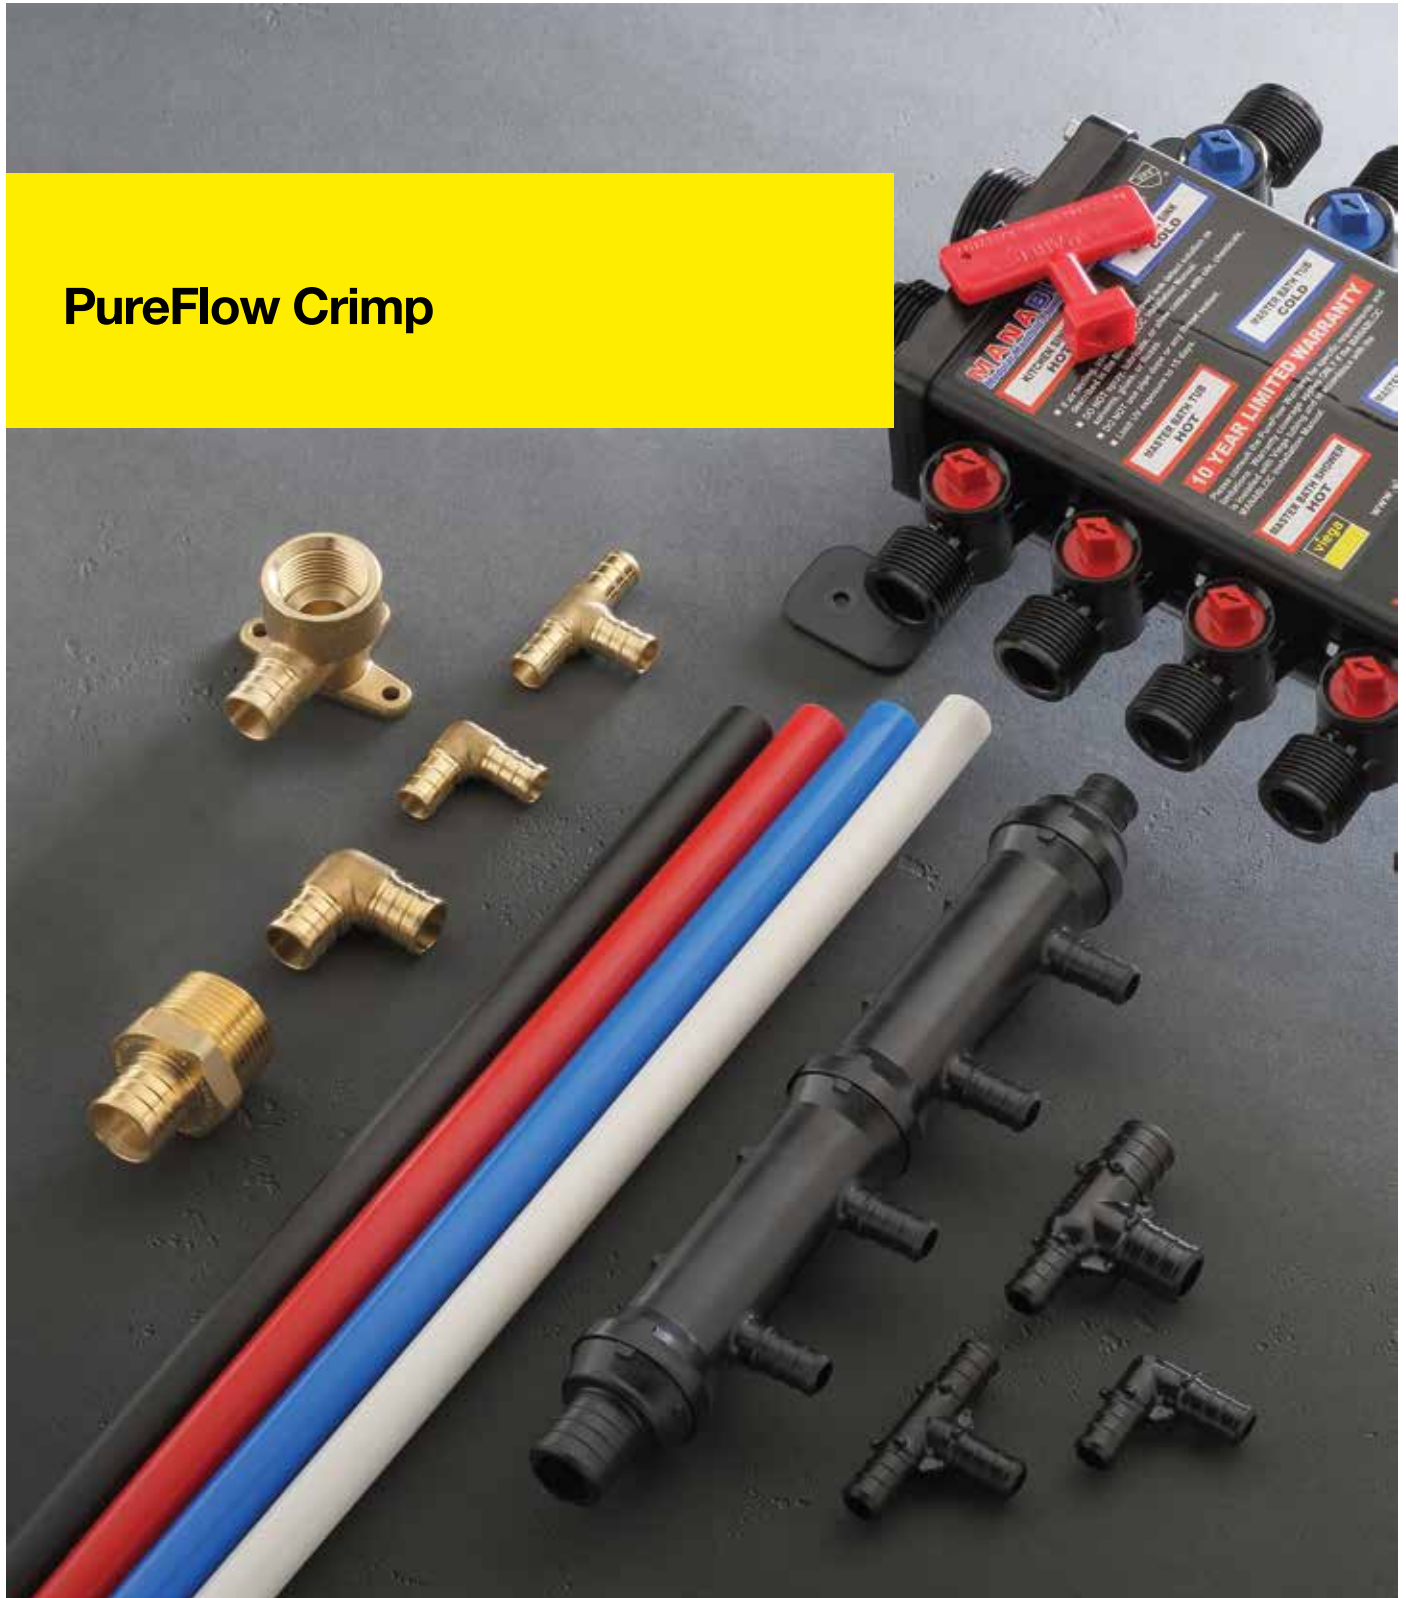

PureFlow Crimp

With the reliability and quality required for potable water, Viega PureFlow Crimp fittings are part of Viega's complete plumbing solution. Matched with the revolutionary Viega ManaBloc water distribution system and the highest-rated PEX tubing in the industry (according to industry standards), Viega PureFlow Crimp fittings are a time-tested method for joining PEX.

FEATURES AND BENEFITS

- EcoBrass fittings provide better corrosion resistance than other brass fittings
- High-performance polyalloy fittings are made in the USA
- Peace of mind from durable materials and quality manufacturing
- Available in sizes $\frac{3}{8}$ " to 1"
- 25-year limited warranty

CODES AND STANDARDS

- CSA B214: Installation Code for Hydronic Heating Systems
- IAPMO: California Plumbing Code (CPC)
- IAPMO: National Standard Plumbing Code (NSPC)
- IAPMO: Uniform Mechanical Code (UMC)
- IAPMO: Uniform Plumbing Code (UPC)
- IAPMO: Uniform Solar, Hydronics and Geothermal Code (USHGC)
- ICC: International Mechanical Code (IMC)
- ICC: International Plumbing Code (IPC)
- ICC: International Residential Code (IRC)
- National Building Code of Canada (NBCC)
- National Plumbing Code of Canada (NPCC)

LISTINGS AND CERTIFICATIONS

- ASTM E84: Standard Test Method for Surface Burning Characteristics of Building Materials
- ASTM F876: Standard Specification for Cross-linked Polyethylene (PEX) Tubing
- ASTM F877: Standard Specification for Cross-linked Polyethylene (PEX) Water Distribution System
- ASTM F1807/F2159: Standard Specification for Cross-linked Polyethylene (PEX) Insert Fittings
- ASTM F2023: Standard Test Method for Evaluating the Oxidative Resistance of Cross-linked Polyethylene PEX Tubing and Systems to Hot Chlorinated Water
- AWWA C904: Cross-linked Polyethylene (PEX) Pressure Pipe for Water Service
- CAN/ULC S101: Standard Method of Test for Surface Burning Characteristics
- CAN/ULC S102.2: Standard Method of Test for Surface Burning Characteristics of Flooring, Floor Coverings, and Miscellaneous Materials and Assemblies
- CSA B137.5: Standard Specification for PEX Tubing Systems in Pressure Applications
- HUD MR1276: Housing and Urban Development Materials Release
- IAPMO file 3700 (Potable Water Distribution Manifold)
- IAPMO file 4030 Cross-linked Polyethylene Water Distribution System (PEX)
- IAPMO file 4874 (FostaPEX)
- ICC-ES PMG-1038 (PureFlow)
- NSF/ANSI 14: Plastics Piping System Components and Related Materials
- NSF/ANSI/CAN 61: Drinking Water Systems Components – Health Effects

- NSF/ANSI 372: Drinking Water Systems Components – Lead Content
- UL 1821: Thermoplastic Sprinkler Pipe and Fittings for Fire Protection Service
- UL 2846: Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics

ZERO LEAD

References to Zero Lead throughout this publication mean products meet the requirements of both NSF/ANSI 372 ($\leq 0.25\%$ maximum weighted average lead content) and NSF/ANSI/CAN 61.

NOTE

Crimp rings are not sold with any PureFlow Crimp product unless otherwise specified.


Viega PureFlow Crimp supply adapter

- For connecting PEX supply lines to Viega ManaBloc and Viega MiniBloc
- PolyAlloy
- Crimp connection, Viega ManaBloc supply connection

Model V5213

Crimp	Supply	Wt [lb]	Quantity	Part No	DG
3/4	1	0.095	5	50141	2
1	1	0.100	5	50151	2


Viega PureFlow Crimp supply adapter
Zero Lead

- For connecting PEX supply lines to Viega ManaBloc and Viega MiniBloc
- Brass
- Crimp connection, Viega ManaBloc supply connection

Model V5034ZL

Crimp	Supply	Wt [lb]	Quantity	Part No	DG
3/4	1	0.198	5	46414	2
1	1	0.206	5	46416	2


Ferrule

- For Viega ManaBloc compression connections, risers, Valves
- Plastic

Model V5085

CTS	O.D.	Wt [lb]	Quantity	Part No	DG
1/8	1/4	0.001	100	53000	2
1/4	3/8	0.001	100	53005	2
3/8	1/2	0.001	50	53015	2
1/2	5/8	0.001	100	53020	2


Insert stiffener

- For Viega ManaBloc compression connections, risers
- Stainless steel

Model V5086

CTS	O.D.	Wt [lb]	Quantity	Part No	DG
1/4	3/8	0.003	100	56100	2
3/8	1/2	0.003	50	56110	2
1/2	5/8	0.005	50	56120	2
3/4	7/8	0.010	50	56140	2


Viega PureFlow ManaBloc supply adapter
Zero Lead

- For connecting CTS-sized supply lines to Viega ManaBloc or Viega MiniBloc
- Equipped with insert stiffener Model V5086
- Brass
- Compression, Viega ManaBloc supply connection

Model V5032ZL

CTS	Supply	Wt [lb]	Quantity	Part No	DG
3/4	1	0.395	5	46346	2


Viega PureFlow ManaBloc supply adapter
Zero Lead

- For connecting FPT supply lines to Viega ManaBloc and Viega MiniBloc
- Brass
- Male pipe thread, Viega ManaBloc supply connection

Model V5033ZL

MPT	Supply	Wt [lb]	Quantity	Part No	DG
3/4	1	0.329	5	46646	2
1	1	0.399	5	46656	2


Viega ManaBloc supply adapter
Zero Lead

- For connecting polybutylene (PB) supply lines to Viega Manabloc
- Brass
- Polybutylene (PB) connection, Viega ManaBloc connection

Note

Does not include ring for PB connection

Model V5035ZL

PB	Supply	Wt [lb]	Quantity	Part No	DG
3/4	1	0.036	1	50268	2
1	1	0.036	1	50269	2

New