

Zurn Wilkins 20XL Pressure Reducing Valve

Compact Design, Universal Connections

An excellent value in a compact design, the 20XL is an ideal pressure reducing valve for any residential location. It's durable and easy to repair. The short lay length and universal connection options make it easy to install and perfect for tight spaces.



Compact Dimensions

- Small design is ideal for tight spaces
- Available in most common sizes and connection options
- Fast and Easy Installs

Consistent Performance

- Durable construction with superior strength
- Corrosion resistant composite cartridge and bell housing
- Integral strainer stops debris

Low Cost, High Value

- Inexpensive without sacrificing quality
- NSF/ANSI 61 compliant, ASSE Listed 1003, cUPC listed, Clean Drinking Water Act Compliant
- Helps conserve water, reduces waste due to excess pressure and lowers energy costs


Zurn Wilkins 20XL Pressure Reducing Valve

Find more information at:
zurn.com/products/water-control/pressure-reducing-valves/20xl




Typical Installation

Horizontal Installation

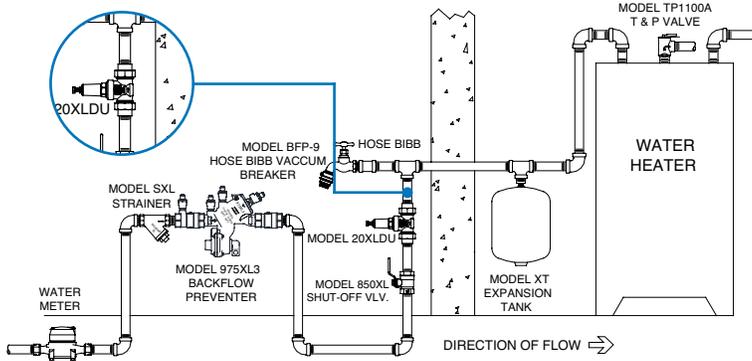

Vertical Installation

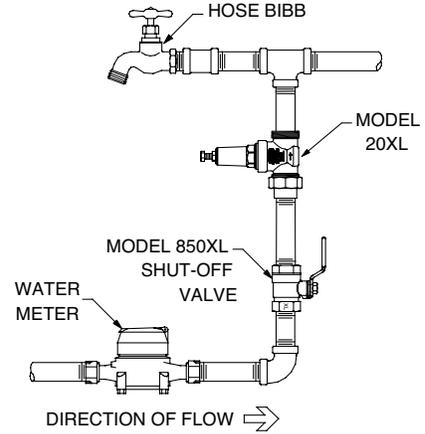

Features

- **Size:** 3/4", 1"
- **Maximum working water pressure:** 300 psi
- **Maximum working water temperature:** 140°F (60°C)
- **Reduced pressure range:** 25 psi - 75 psi
- **Factory preset:** 50 psi
- **Threaded connections:** (FNPT) ANSI B1.20.1
- **Copper connections:** (Female) ANSI B 16.22

Standard Compliance

- ASSE Listed 1003
- cUPC® Listed
- CSA Certified
- Meets the requirements of NSF/ANSI/CAN 61

Options

Standard with single FNPT union connection

- C** With female copper sweat union connection
- DU** With double FNPT union connections
- DUC** With double female copper sweat union connections
- DULU** With two integral FNPT connections (no unions)
- PEX** With integral male crimp pex (ASTM F1807) barb connections for cross-linked polyethylene tubing
- EPEX** With integral male expansion pex (ASTM F1960) barb connections for cross-linked polyethylene tubing

Retrofit Kit: Order and Install with 20XLDULU to replace existing PRV

EXISTING INSTALLATION TYPE:	SINGLE UNION				DOUBLE UNION			
	NR3XL, NR3, BR4		70XL, 70		NR3XL, NR3, BR4		70XL, 70	
EXISTING MODEL:	3/4"	1"	3/4"	1"	3/4"	1"	3/4"	1"
RFK34-NR3-20XL	X				X			
RFK1-NR3-20XL		X				X		
RFK34-70-20XL			X					
RFK34-70DU-20XL							X	
RFK-70-20XL			X					X

Accessories

PART NUMBER	USE WITH
RK34-1-20XL	all 3/4" and 1" 20XL In-line Spacer Nipple Kits
SPK34-20XL	3/4" with FNPT union connections
SPK34-20XLC	3/4" with copper sweat union connections
SPK1-20XL	1" with FNPT union connections
SPK1-20XLC	1" with copper sweat union connections