

For mounting Flexcon expansion vessels (2 - 25 litres) to a wall.  
With the Flexconsole the Flexcon vessel is set up vertically fitted to the water connection with the water nipple fitted on connection B of the console and the expansion pipe fitted to connection A.

### Advantages


- Equipped with a wall plate with two slots for accurate wall mounting.

### Technical Specifications

- Minimum/Maximum working temperature: -10 °C / 120 °C (14 °F / 248 °F).
- Minimum/Maximum working pressure: 0.2 / 10.0 bar (3 / 145 Psi).
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with ANSI/ASME B1.20.1.
- Application:  
97975 and 97977 only suitable for hydronic systems.  
97976 only suitable for potable water.



Description		Flexconsole 1/2NPT x1/2NPT
Order Code		97975
GTIN		08712874979758
Model		<u>Flexconsole NPT</u>
Connection	A	1/2" NPT
	B	1/2" NPT
Dimensions	C ["]	7.67
	D ["]	10.83
	E ["]	1.61

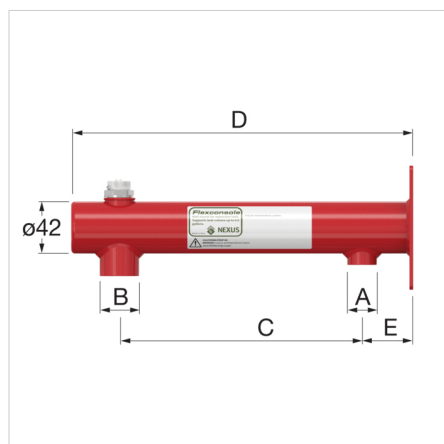

**Classification General Data**

<b>Etim Group</b>	Pressure increase/decrease
<b>Etim Class</b>	Pressure expansion vessel console
<b>Product Name</b>	Flexconsole 1/2NPT x1/2NPT
<b>Brand</b>	FLAMCO
<b>Product Type</b>	Vessel Mounting
<b>Artikelnummer</b>	97975
<b>GTIN</b>	08712874979758

**Find more information online:**Packaging data**Attributes**

<b>Tank size</b>	2 - 25 l
<b>Built-in pressure relief valve</b>	No
<b>Thread connection central heating</b>	Internal thread cylindrical BSPP-G (ISO 228-1)
<b>Thread connection, tank</b>	Internal thread cylindrical BSPP-G (ISO 228-1)
<b>Size of tank thread connection</b>	3/4 inch

Fort Blauwkapel 1  
1358 DB, Almere - nl

T +31 (0)36 52 62 300  
E [info@aalberts-hfc.com](mailto:info@aalberts-hfc.com)  
I [flamcogroup.com](http://flamcogroup.com)