



# **AP23-S Condensate Pump Technical Information**

### **Dimensions:**





Pump is certified to CAN/CSA STD C22.2 no. 108 4007096 Pump conforms to ANSI/UL STD 778




**Weight:** 1.93 kg, 4.25 lbs (empty)

#### **Electrical:**

Pump: 120VAC 60Hz, 78.4W, 1.38 Amps High level safety switch rating: 125 or 250VAC 6A, 125V DC 0.4A, 250V DC 0.3A

# <u>Pump Performance:</u>

Submerged pump is self-priming 282 L/hr (74 gph) @ free flow 123 L/hr (32 gph) @ 7 m (23ft)

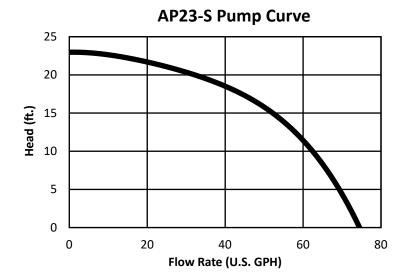

# **Specification:**

The Condensate pump shall be AXIOM INDUSTRIES LTD. Model AP23-S. System shall include 1.8 Liter (0.5 U.S. gallon) tank made and lid made from ABS, pump with thermal cut-out and electrically certified to CAN/CSA STD C22.2 no. 108 conforms to ANSI/UL STD 778; low level float switch; high level float switch with N.C. or N.O. Contacts (factory set to N.C.) for remote alarm system; check valve; 6 ft. long power cord. Power Supply 110/60/1.38A.

#### **Accessories:**

**RIA10-1-SAA** - High level alarm panel provides audible and visual alarm for high level indication.

### **Limited Warranty:**

The "AP23-S" is warranted against defects in materials and workmanship for two years.

## **Project Details:**

Project	Location
Consultant	Contractor
Unit Tag	Sales Agent