

AIRSTAGE MULTI-ROOM MINI-SPLIT SYSTEMS

Specifications of Indoor Units

[Connectable Indoor unit line-up \(2 to 5 Zones\)](#)

Wall Mounted ASUH07/09/12/15/18/24LPAS



Model No.		ASUH07LPAS	ASUH09LPAS	ASUH12LPAS	ASUH15LPAS	ASUH18LPAS	ASUH24LPAS
Performance							
Rated Cooling	BTU/h	7,000	9,000	12,000	14,000	18,000	24,000
Rated Heating		7,500	9,600	12,800	16,000	19,200	25,600
Fan (Cooling Mode)							
Air Circulation: Hi	CFM (m3/h)	383 (650)	412 (700)	412 (700)	453 (770)	530 (900)	642 (1,090)
Medium		318 (540)	330 (560)	330 (560)	353 (600)	471 (800)	530 (900)
Low		253 (430)	253 (430)	253 (430)	265 (450)	377 (640)	471 (800)
Quiet		188 (320)	188 (320)	182 (310)	182 (310)	241 (410)	306 (520)
Fan Speed Stages		4+Auto	4+Auto	4+Auto	4+Auto	4+Auto	4+Auto
Sound							
Indoor Level (Clg/Htg): Hi	dB(A)	38/41	40/42	40/42	43/44	44/43	49/47
Medium		33/35	34/36	35/38	36/39	42/39	44/43
Low		29/31	29/31	30/33	30/33	37/34	42/37
Quiet		21/22	21/22	21/22	21/24	26/28	31/32
Electrical							
Voltage/Frequency/Phase		208/230 V ~ 60 Hz	208/230 V ~ 60 Hz	208/230 V ~ 60 Hz	208/230 V ~ 60 Hz	208/230 V ~ 60 Hz	208/230 V ~ 60 Hz
Current Rated/Max: Cooling	Amps	0.18/ 0.23	0.20/ 0.25	0.24/ 0.3	0.35/ 0.44	0.32/ 0.40	0.46/ 0.58
Current Rated/Max: Heating		0.18/ 0.23	0.20/ 0.25	0.24/ 0.3	0.35/ 0.44	0.32/ 0.40	0.46/ 0.58

Input Power	W	18	22	26	42	34	55	
Size & Weight								
Net Weight	lbs. (kg)	21 (9.5)	21 (9.5)	22 (10.0)	22 (10.0)	29 (13)	29 (13)	
Dimensions: Height	Inch	10-5/8	10-5/8	10-5/8	10-5/8	11	11	
	mm	270	270	270	270	280	280	
Width	Inch	32-13/16	32-13/16	32-13/16	32-13/16	38-9/16	38-9/16	
	mm	834	834	834	834	980	980	
Depth	Inch	8-3/4	8-3/4	8-3/4	8-3/4	9-7/16	9-7/16	
	mm	222	222	222	222	240	240	
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A	
Additional Data								
Air Direction: Horizontal		Manual	Manual	Manual	Manual	Manual	Manual	
Air Direction: Vertical		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	
Air Filter Type		Washable	Washable	Washable	Washable	Washable	Washable	
Ion Deodorizing Filter		Disposable	Disposable	Disposable	Disposable	Disposable	Disposable	
Apple-Catechin Filter		Disposable	Disposable	Disposable	Disposable	Disposable	Disposable	
Lineset Size	Inch	Gas	3/8	3/8	3/8	1/2	1/2	5/8*
		Liq.	1/4	1/4	1/4	1/4	1/4	1/4

* Use the attached adapter to change the pipe size from Ø1/2 in (Ø12.7 mm) to Ø5/8 in (Ø15.88 mm)

Floor Mount AGU9/12/15RLF



Model No.	AGU9RLF	AGU12RLF	AGU15RLF
Performance			

Rated Cooling	BTU/h	9,000	12,000	14,000
Rated Heating		9,600	12,800	16,000
Fan (Cooling Mode)				
Air Circulation: Hi	CFM (m3/h)	312 (530)	353 (600)	383 (650)
Medium		259 (440)	288 (490)	306 (520)
Low		212 (360)	224 (380)	235 (400)
Quiet		159 (270)	159 (270)	159 (270)
Fan Speed Stages		4+Auto	4+Auto	4+Auto
Sound				
Indoor Level (Clg/Htg): Hi	dB(A)	39/39	42/42	44/44
Medium		34/35	36/38	38/39
Low		28/30	30/32	31/33
Quiet		22/22	22/22	22/22
Electrical				
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1
Current Rated/Max: Cooling	Amps	0.15/0.33	0.18/0.33	0.2/0.38
Current Rated/Max: Heating		0.15/0.33	0.18/0.33	0.2/0.38
Input Power	W	16	20	23
Size & Weight				
Net Weight	lbs. (kg)	31 (14)	31 (14)	31 (14)
Dimensions: Height	Inch	23-5/8	23-5/8	23-5/8
	mm	600	600	600
Width	Inch	29-1/8	29-1/8	29-1/8
	mm	740	740	740
Depth	Inch	7-7/8	7-7/8	7-7/8
	mm	200	200	200
Refrigerant		R410A	R410A	R410A
Additional Data				
Air Direction: Horizontal		Manual	Manual	Manual
Air Direction: Vertical		Auto	Auto	Auto

Apple Catechin Filter			Washable	Washable	Washable
Ion Deodorizing Filter			Yes	Yes	Yes
Connection Method			Yes	Yes	Yes
Lineset Size	Inch	Gas	3/8	3/8	1/2
		Liq.	1/4	1/4	1/4


Compact Cassettes ACUH07/09/12/18LUAS1



Model No.		ACUH07LUAS1	ACUH09LUAS1	ACUH12LUAS1	ACUH18LUAS1
Performance					
Rated Cooling	BTU/h	7,000	9,000	12,000	18,000
Rated Heating		7,500	9,600	12,800	19,200
Fan (Cooling Mode)					
Air Circulation: Hi	CFM (m3/h)	318 (540)	318 (540)	359 (610)	441 (750)
Medium		288 (490)	288 (490)	312 (530)	359 (610)
Low		259 (440)	259 (440)	277 (470)	306 (520)
Quiet		230 (390)	230 (390)	241 (410)	241 (410)
Fan Speed Stages		4+auto	4+auto	4+auto	4+auto
Sound					
Indoor Level (Clg/Htg): Hi	dB(A)	33/34	33/34	37/37	42/44
Medium		31/32	31/32	33/33	37/40
Low		29/29	29/29	31/31	33/37
Quiet		27/27	27/27	28/28	29/30
Electrical					
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Current Rated/Max: Cooling	Amps	0.15/0.19	0.15/0.19	0.19/0.24	0.30/0.38
Current Rated/Max: Heating		0.15/0.19	0.15/0.19	0.19/0.24	0.30/0.38
Input Power	W	18	18	23	39

Size & Weight						
Net Weight		lbs. (kg)	33 (15)	33 (15)	33 (15)	33 (15)
Dimensions: Height		Inch	9-5/8	9-5/8	9-5/8	9-5/8
		mm	245	245	245	245
Width		Inch	22-7/16	22-7/16	22-7/16	22-7/16
		mm	570	570	570	570
Depth		Inch	22-7/16	22-7/16	22-7/16	22-7/16
		mm	570	570	570	570
Refrigerant			R410A	R410A	R410A	R410A
Additional Data						
Air Direction: Vertical			Automatic	Automatic	Automatic	Automatic
Air Filter Type			Washable	Washable	Washable	Washable
Front Grille:		UTG-CCGFGA*				
Grille Dim: Height		Inch (mm)	1-15/16 (49)	1-15/16 (49)	1-15/16 (49)	1-15/16 (49)
Width			24-7/16 (620)	24-7/16 (620)	24-7/16 (620)	24-7/16 (620)
Depth			24-7/16 (620)	24-7/16 (620)	24-7/16 (620)	24-7/16 (620)
Lineset Size	Inch	Gas	3/8	3/8	3/8	1/2
		Liq.	1/4	1/4	1/4	1/4

Slim Duct ADUH07/09/12/18/24LUAS1



Model No.		ADUH07LUAS1	ADUH09LUAS1	ADUH12LUAS1	ADUH18LUAS1	ADUH24LUAS1
Performance						
Rated Cooling	BTU/h	7,000	9,000	12,000	18,000	24,000
Rated Heating		7,500	9,600	12,800	19,200	25,600
Fan (Cooling Mode)						
Air Circulation: Hi	CFM (m3/h)	324 (550)	353 (600)	382 (650)	553 (940)	783 (1330)
Medium		288 (490)	324 (550)	353 (600)	518 (880)	730 (1240)
Low		25/25	26/25	27/27	30/31	30/32


Quiet		259 (440)	265 (450)	283 (480)	441 (750)	606 (1030)
Fan Speed Stages		4+Auto	4+auto	4+auto	4+auto	4+Auto
Sound						
Indoor Level (Clg/Htg): Hi	dB(A)	28/28	28/28	29/29	32/33	33/35
Medium		26/26	27/26	28/28	31/32	32/34
Low		25/25	26/25	27/27	30/31	30/32
Quiet		24/24	25/24	26/24	29/29	29/29
Electrical						
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Static Pressure	W.C	0 to 0.36	0 to 0.36	0 to 0.36	0 to 0.36	0 to 0.2
Current Rated/Max: Cooling	Amps	0.3/0.38	0.3/0.38	0.35/0.44	0.44/0.55	0.66/0.83
Current Rated/Max: Heating		0.3/0.38	0.3/0.38	0.35/0.44	0.44/0.55	0.66/0.83
Input Power	W	33	49	58	73	111
Size & Weight						
Net Weight	lbs. (kg)	35 (16)	37 (17)	37 (17)	44 (20)	53 (24)
Dimensions: Height	Inch	7-13/16	7-13/16	7-13/16	7-13/16	7-13/16
	mm	198	198	198	198	198
Width	Inch	27-9/16	27-9/16	27-9/16	35-7/16	43-5/16
	mm	700	700	700	900	1100
Depth	Inch	24-7/16	24-7/16	24-7/16	24-7/16	24-7/16
	mm	620	620	620	620	620
Supply Duct Flange Dimensions: Height	Inch	5-15/16	5-15/16	5-15/16	5-15/16	5-15/16
	mm	151	151	151	151	151
Width	Inch	25-9/16	25-9/16	25-9/16	33-7/16	41-11/32
	mm	650	650	650	850	1050
Depth	Inch	3/4	3/4	3/4	3/4	3/4
	mm	19	19	19	19	19
Return Duct Dimensions: Height	Inch	6-7/8	6-7/8	6-7/8	6-7/8	6-7/8
	mm	175	175	175	175	175
Width	Inch	22-5/8	22-5/8	22-5/8	30-1/2	37-3/4
	mm	575	575	575	775	959
Depth	Inch	3/4 Flat	3/4 Flat	3/4 Flat	3/4 Flat	3/4 Flat

		mm	19 Flat	19 Flat	19 Flat	19 Flat	19 Flat
Refrigerant/Refrigerant			R410A	R410A	R410A	R410A	R410A
Additional Data							
Air Filter Type/Air Filter Type			Washable	Washable	Washable	Washable	Washable
Lineset Size	Inch	Gas	3/8	3/8	3/8	1/2	5/8
		Liq.	1/4	1/4	1/4	1/4	1/4

Welcome to the Fujitsu General Resource Center. This area is loaded with valuable information such as rebates, case studies, videos, news, press releases, an efficiency calculator and an easy way to locate your local Fujitsu General contractor.



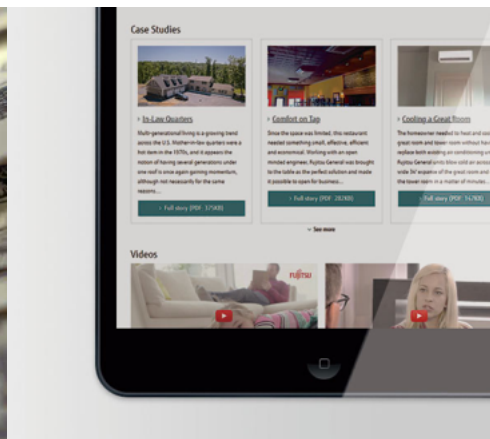

REBATES





MEDIA LIBRARY




LOCATE A CONTRACTOR


Product Registration 


Downloads


FAQs & Troubleshooting


Contact

RESIDENTIAL PRODUCTS

AIRSTAGE SINGLE-ROOM MINI-SPLIT SYSTEMS

AIRSTAGE SPLIT TERMINAL HEAT PUMP SYSTEMS

AIRSTAGE MULTI-ROOM MINI-SPLIT SYSTEMS

CENTRAL AIR CONDITIONERS, HEAT PUMPS, AND FURNACES

SERVICE & SUPPORT

Product Registration

Warranty Lookup

Downloads

FAQs & Troubleshooting

Contact

Support Tool

MEDIA LIBRARY

COMMERCIAL

AIRSTAGE MINI-SPLIT

BENEFITS

Energy Efficiency

Individual Control

Year-Round Comfort

Reliability

Easy Installation

Décor Options

Quiet Operation

FGLair™ Wireless LAN app

AIRSTAGE MOBILE app

Smart Speaker

Rebates and Offers

Federal Tax Credit

Inflation Reduction Act

AIRSTAGE MINI-SPLIT

TECHNOLOGY

Ductless Comfort

Air Filtration

Inverters: Constant Comfort

XLTH Low Temp Heating

User Friendly Controls

LOCATE A CONTRACTOR

COMPANY

FOLLOW US



Select a region/country |  United States & Canada | English

[Terms of Use](#) | [Privacy](#) | [Sitemap](#) | [Contact](#)

© 1996- 2024 FUJITSU GENERAL.