


iQ1001, Gen II Submittal Data

Date:	<input type="text"/>	Bid Date:	<input type="text"/>
Project Name:	<input type="text"/>	Fuel Type:	<input type="checkbox"/> Natural Gas <input type="checkbox"/> Propane
Project #:	<input type="text"/>	Factory Option:	<input type="checkbox"/> iNTouch-BMS
City State Zip:	<input type="text"/> <input type="text"/> <input type="text"/>	Factory Option:	<input type="checkbox"/> Propane Setup
Engineer:	<input type="text"/>		
Contractor:	<input type="text"/>		

	Temperature Rise (ΔT) °F						
	40	50	60	70	80	90	100
Flow (GPM)	47.2	37.8	31.5	26.7	23.6	20.8	18.7



KEY FEATURES

- Multiple Stainless (316L) Heat Exchangers
- Flexible-Floating Design, stress-relieving and thermal shock resistant
- Built-in Redundancy - Multiple heat engines with individual controls
- Multi-Unit - Masterless cascading with common venting
- Gas Pressures - Operates on gas pressure range of 2.5"-14" WC
- ASME-HLW Compliant
- Designed and Built in the U.S.
- 7" Color Touch Screen - access to usage data, troubleshooting, and parts wear
- Wi-Fi Connectivity

PERFORMANCE

- Turndown Ratio of 33:1 per unit
- Cascade up to 4 units with common venting for a total of over 4000MBH and a 132:1 total turndown ratio





iQ1001, Gen II Specifications



PARAMETERS	MODELS
	iQ1001, Gen II
Type	Indoor/Outdoor, Floor Mounted, Condensing, Fully Modulating, On-Demand Water Heater
Fuel	Preset for NG / LP convertible
Minimum Input (BTU/hr)	30,000
Maximum Input (BTU/hr)	1,001,000
Maximum Output (BTU/hr)	940,940
Thermal Efficiency	94%
Turn Down Ratio (TDR)	33:1
Water Inlet / Outlet Connections	2" Headers with 6" OD Flange
Gas Inlet Connection	1-1/4" Gas Inlet With 4-5/8" OD Flange
Condensate Drain Connection	3/4" Flex PVC
Maximum Condensate Flow Rate (GPH)	7.2
Unit Dimensions H X W X D (Inches)	67.7 X 30 X 44.3 (48 CU. FT)
Service Clearances	Recommend 24" on all sides, 32" in the front
Unit Weight (LBS)	800 LBS
Shipping Crate Dimensions H X W X D / Weight	87 X 47 X 67 (Inches) / 1059 (LBS)
Venting Type	Direct Vent (2 pipe - intake & exhaust), Power Vent (1 pipe - exhaust only)
Venting Materials (USA)	Sch. 40 PVC, Sch. 80 CPVC, Polypropylene, Stainless Steel (AL29-4C)
Venting Materials (Canada)	Type BH Gas Vent Classes: II A (PVC), II B (CPVC), II C (Polypropylene), I (AL 29-4C SS)
Vent Size (Diameter)	6" Ø
Max Vent Length - Single Pipe / Power Vent*	130 ft (6")
Max Vent Length - Two Pipe / Direct Vent*	65 ft (6")
* Venting Note: From the maximum lengths above, deduct 5 ft. per 90° elbow and 2 ft. per 45° elbow	
Ignition	Electronic Spark Ignition
Temperature Range	100°F – 190°F
Temperature Stability	+/- 4°F
Installation Location Ambient Temperature	40°F – 130°F
Safety	Flame Rod, Thermal Fuse, Overheat Prevention Device, Fan Speed Monitor, Flue Temperature Monitor, Blocked Vent Detector, Dual Flame Sensing
Water Pressure Min / Max (PSIG)	30 / 160
Pressure Relief Valve (Select BTU/hr Input Rating to Match Model Max Input)	3/4"
NG/LP - Min. Dynamic Gas Pressure (Full Fire)	2.5" WC (Set Gas Regulator to 8" WC for NG 11" WC for LP)
NG/LP - Maximum Static Gas Pressure	14" WC (Set Gas Regulator to 8" WC for NG 11" WC for LP)
Gas Regulator Pressure Set To	8" WC for NG, 11" WC for LP
Electrical	120V AC, 60 Hz
Power Consumption	Max 20 Amps, 32W (Standby)
Internal Water Volume (gallons)	4
Features	iQ1001, Gen II
High Turn Down	33:1
Built-In Redundancy	Multiple Heat Engines w/ Individual Control
Cascading	Masterless, 4 units, Automatic Rotation
Common Venting	Yes - up to 4 units
Heat Exchanger	Expandable, Stainless 316L
Listing	ETL (Z21.10.3 / CSA 4.3), ASME HLW, AHRI
Performance GPM	iQ1001, Gen II
Hot Water Capacity (45F Rise)	41.6
Hot Water Capacity (70F Rise)	26.7
Hot Water Capacity (90F Rise)	20.8
Hot Water Capacity (100F Rise)	18.7
Hot Water Capacity (140F Rise)	13.4
Warranty (with recirculation, and unlimited thermal cycles)	Heat Exchanger Coil – 10 years, All Other Parts – 2 years



iQ1001, Gen II Dimensional Specifications

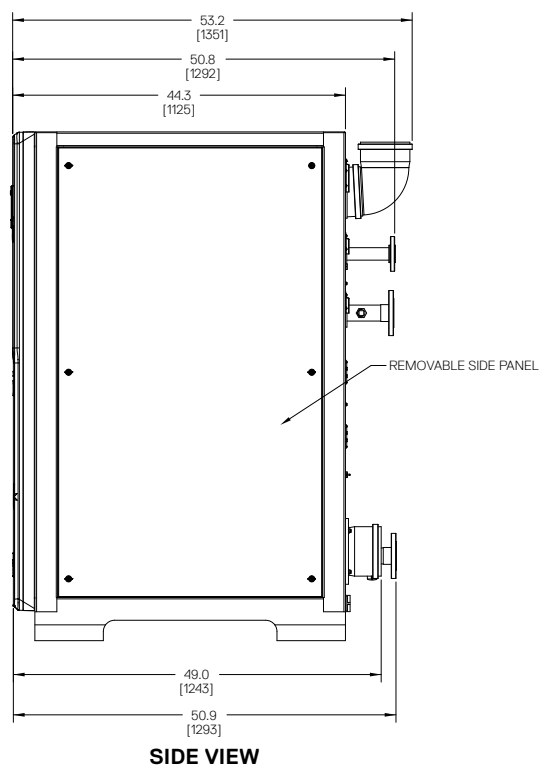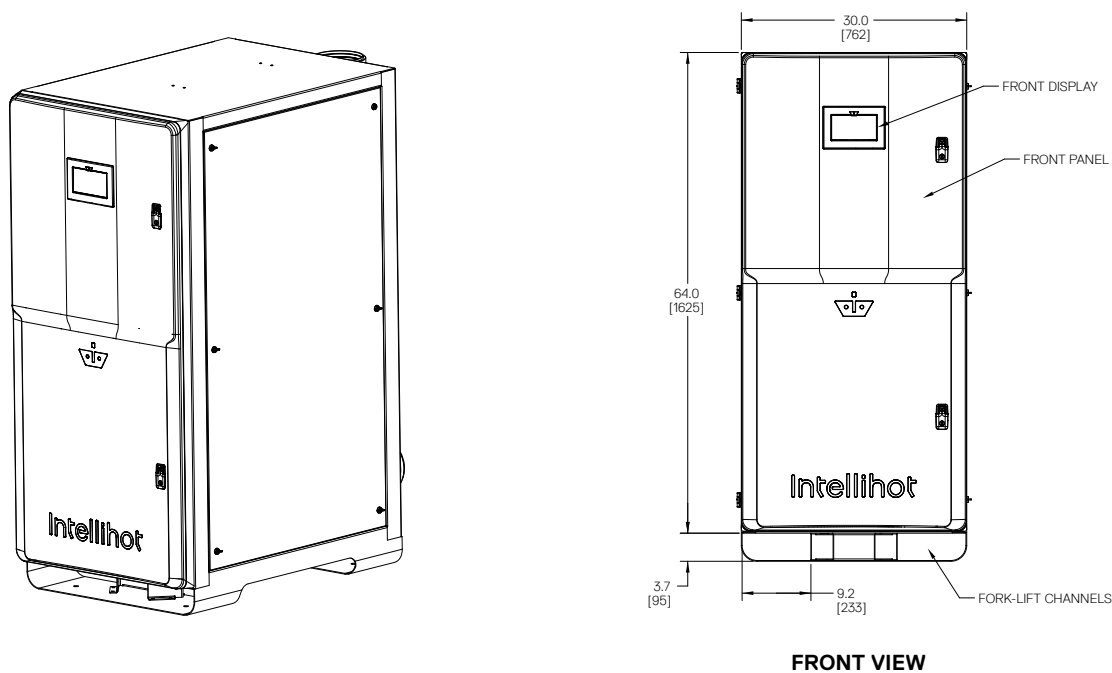


iQ1001, Gen II Dimensional Specifications

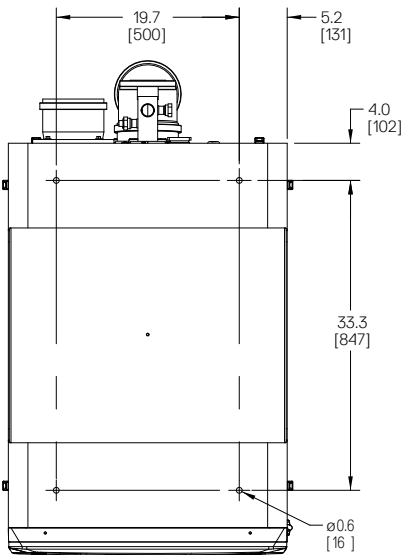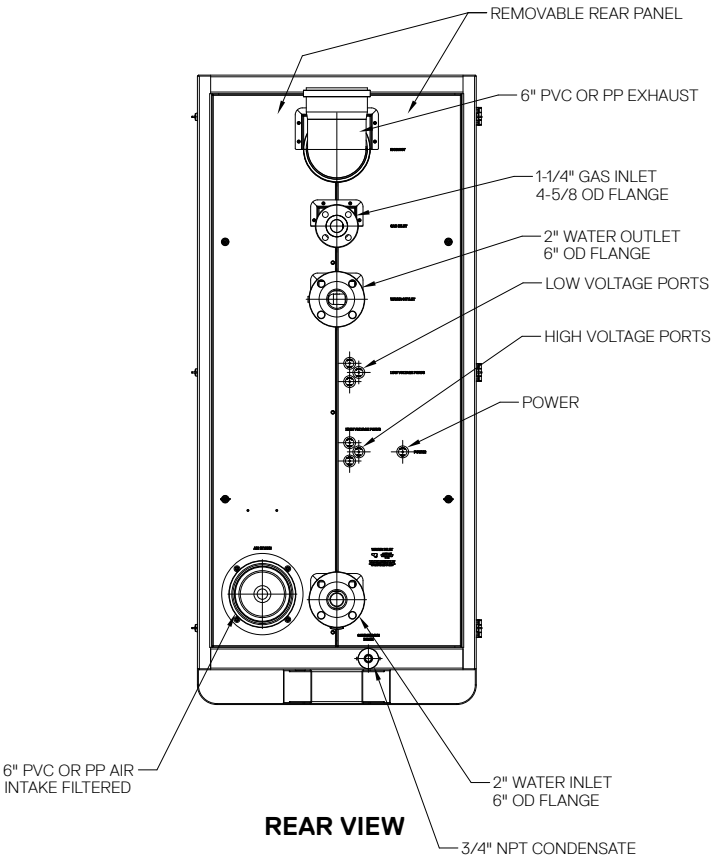


BOTTOM VIEW

iQ1001, Gen II Configuration Options

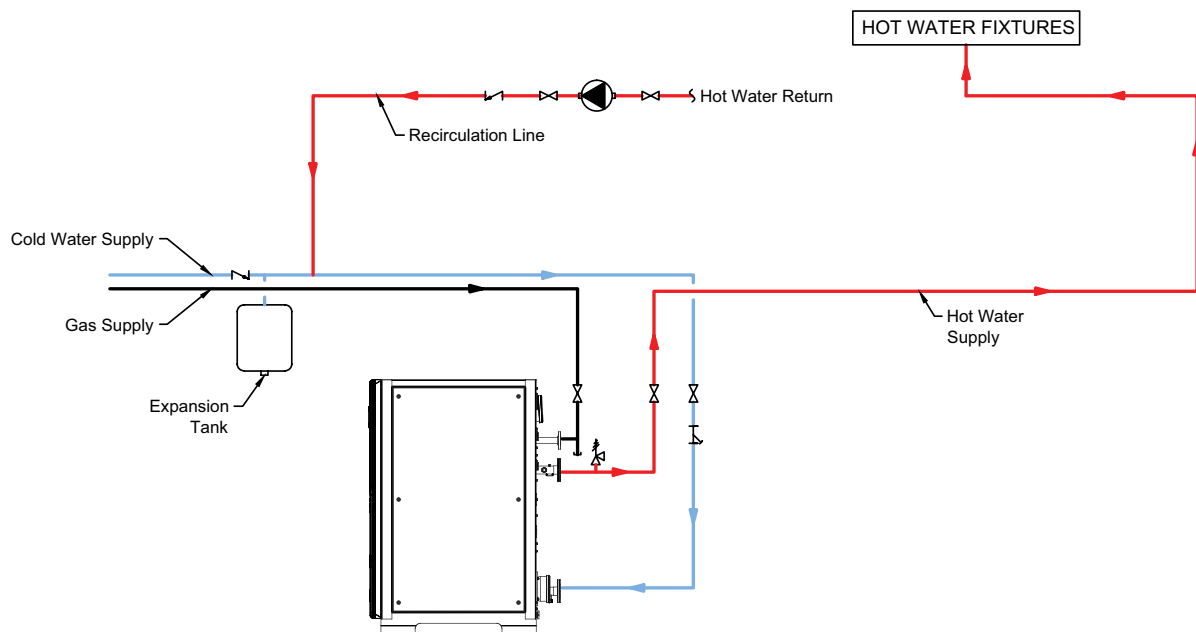


System with no storage tank and without mixing valve.

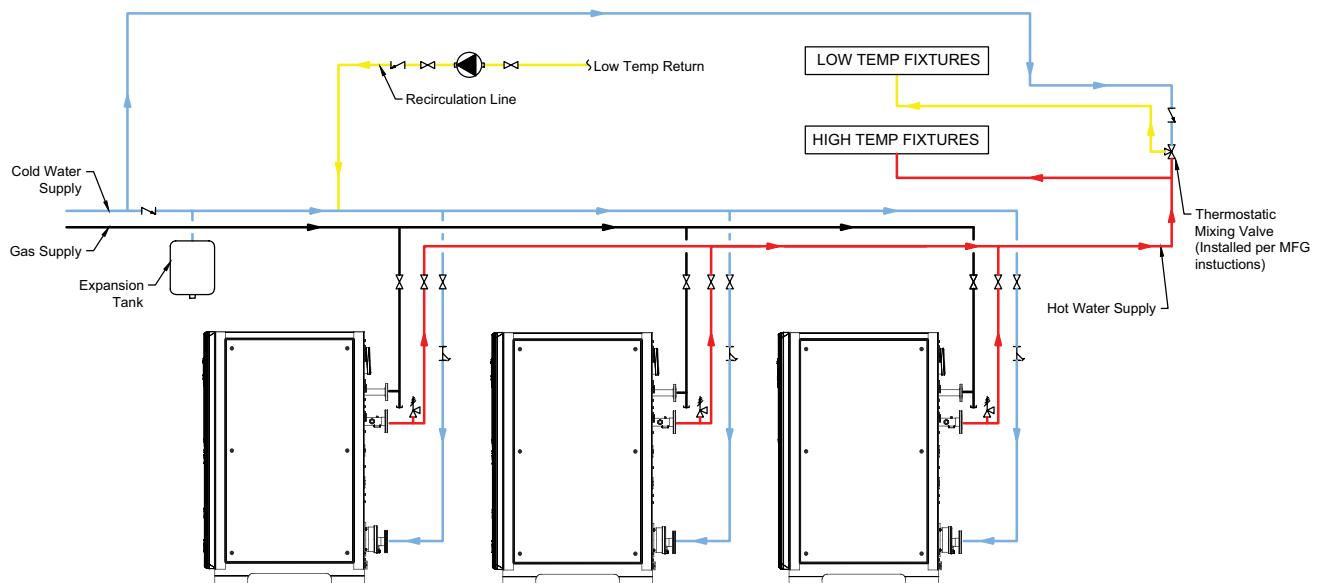

Multiple unit system with mixing valve but no storage tank.


iQ1001, Gen II Pressure Drop, Cascading Support & Clearance Requirements

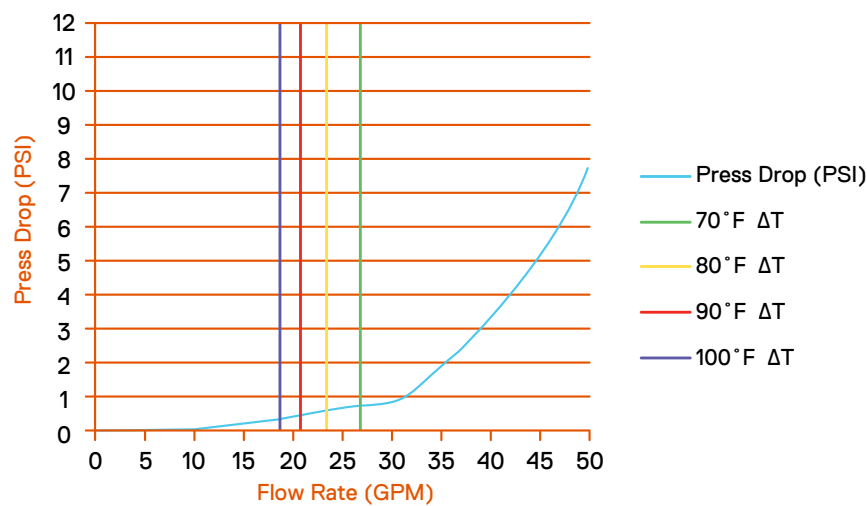

iQ751/iQ1001/iQ1501 Cascading Support			
Model (Max Number of Cascaded Units)	iQ751	iQ1001	iQ1501
iQ751	Yes (Max 4 units)	Yes (Max 4 units)	Yes (Max 4 units)
iQ1001	Yes (Max 4 units)	Yes (Max 4 units)	Yes (Max 4 units)
iQ1501	Yes (Max 4 units)	Yes (Max 4 units)	Yes (Max 4 units)
All other models (i200, i250, iQ251, iQ251D, iN401, iN501, iQ2001 and iQ3001)	Not Supported		

Location	Required		Recommended Service Clearance ¹
	From Combustibles	From Non-Combustibles	
Top	6" (152 mm)	2" (50.8 mm)	18" (457 mm)
Back	5/8" (15.8 mm)	5/8" (15.8 mm)	24" (610 mm)
Sides	1" (25.4 mm)	1/2" (12.7 mm)	24" (610 mm)
Front	2" (51 mm)	2" (50.8 mm)	32" (813 mm)
Bottom	0" (0 mm)	0" (0 mm)	0" (0 mm)

¹ Service clearances are recommended dimensions to allow for normal service of the unit.

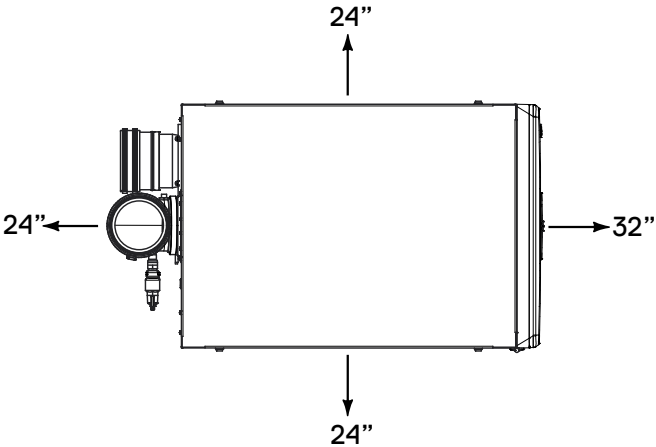

iQ1001, Gen II Venting

Maximum Pipe Length in Feet						
Number of Units	Venting Type	6" Diameter	8" Diameter	10" Diameter	12" Diameter	14" Diameter
		iQ1001	iQ1001	iQ1001	iQ1001	iQ1001
1	1 Pipe	130	500	500	500	500
	2 Pipe	65	250	250	250	250
2	1 Pipe	36	150	440	500	500
	2 Pipe	18	75	220	250	250
3	1 Pipe	-	70	212	500	500
	2 Pipe	-	35	110	250	250
4	1 Pipe	-	42	124	300	500
	2 Pipe	-	21	62	150	250


1 Pipe - Only exhaust out pipe is connected and the combustion air intake is from within the room. For example, one iQ1001 with a 6" diameter, the maximum exhaust pipe length for 1 pipe is 130 feet.

2 Pipe - Both the Combustion air intake and the exhaust pipe are connected. In this case, the table specifies the maximum length per pipe. For example, one iQ1001 with 6" diameter, 65 feet maximum is allowed for combustion air intake pipe and exhaust out pipe. The 65 feet maximum is per pipe.


Note:

1. Reduce the maximum equivalent length above by 5 feet per 90° elbow used and by 2 feet per 45° elbow used. Do not exceed the above set limits.

2. If multiple units are common vented, then the units must be cascaded. Please refer to the combustion section for how to do combustion with common vented units.

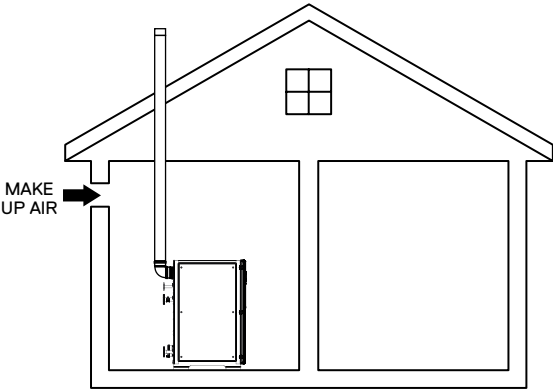

1-Pipe Direct Vent

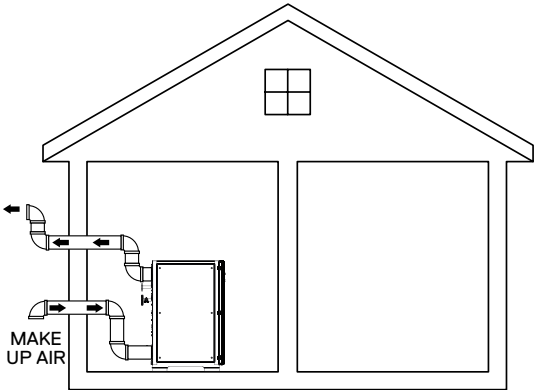

2-Pipe Direct Vent

iQ1001, Gen II Electrical Data

Electrical power required for the water heater is 120V AC, 60 Hz. The circuit breaker shall be sized for a power consumption of 20A (FLA). Larger breakers can be used for multiple units. Please ensure correct polarity of wiring before powering up unit.