

Feature

- 600# WOG
- Bronze body
- Full port
- Dual EzPress ends
- Chrome plated ball
- PTFE seats
- Blow-out proof stem
- Adjustable packing
- MSS-SP-110


Meet BAA requirement



Pressure/ Temperature rating	
Valve body and stem	
600 psi from 15 °F to 160 °F	150 psi max. at 366 °F
Press connections	
250 psi from 15 °F to 160 °F	150 psi max. at 250 °F

Material

	Part	Material	Specification
1	Body	Bronze	ASTM B62 C83600
2	End piece	Bronze	ASTM B62 C83600
3	Ball	Brass / Cr plated	ASTM B124 C37700
4	Seat	PTFE	PTFE
5	Stem	Brass	ASTM B124 C37700
6	Packing ring	PTFE	PTFE
7	Packing nut	Brass	ASTM B124 C37700
8	Handle	Steel / Geomet® plated	ASTM A36
9	Nut	Steel / Zn plated	ASTM A36
10	O-ring	EPDM Perox	NSF approved

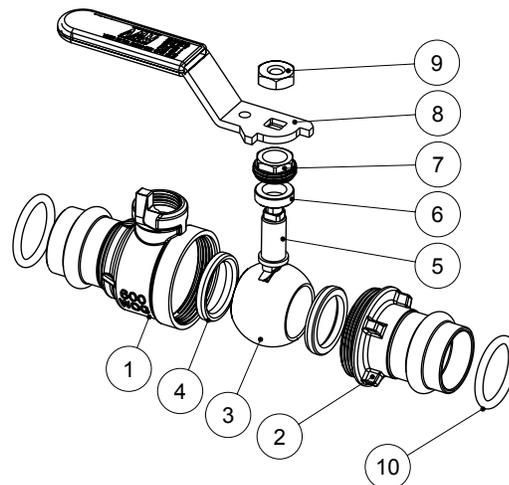

Dimension, Weight

Size	A [in]	L [in]	H [in]	Φ [in]	C [in]	P [in]	Cv	Wt. [lb]
1/2"	3.27	3.60	2.13	0.64	0.79	0.59	15	0.48
3/4"	3.94	3.60	2.26	0.89	0.91	0.79	30	0.70
1"	4.57	4.98	2.58	1.14	0.95	0.98	60	1.26
1 1/4"	5.04	4.98	2.82	1.39	1.22	1.26	110	1.64
1 1/2"	5.98	5.57	3.29	1.64	1.42	1.57	130	2.54
2"	6.97	5.57	3.58	2.14	1.73	1.97	360	3.74

