

TECHNICAL SPECIFICATIONS

CONNECTIONS



SHOWER



SINK

APPLICATION



RESIDENTIAL

Sanishower® Drain Pump





Example of installation. Follow local plumbing codes for actual install.

The **Sanishower drain pump** is used to pump gray water away from a variety of fixtures in **residential applications**. The system is able to discharge the waste up to **12 feet vertical and/or 100 feet horizontal**.

- **Discharges the waste through a 3/4" or 1" rigid pipe. A non-return valve is included** on the discharge fitting assembly provided with the system. Unlike the other models, the discharge for this model is on the side of the enclosure.
- Has been designed to be **vented through a 1-1/4" or 1-1/2" pipe**. The vent output is located on the top of the pump. The case has a knockout which along with the rubber adapter provided is used to connect to the vent pipe. Note: The use of mechanical vents, air admittance valves or similar devices is not permitted.
- Discharges **gray water from a shower or sink**. The gray water will drain into the system **via two 2" inlets (with built-in check valves)** on either side of the housing.



PUMPING DISTANCE

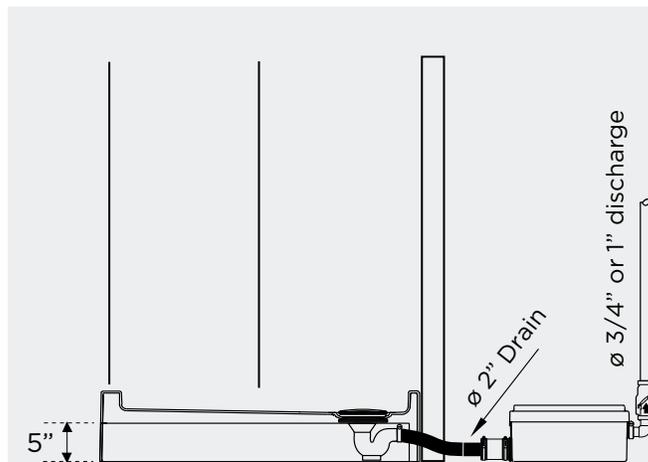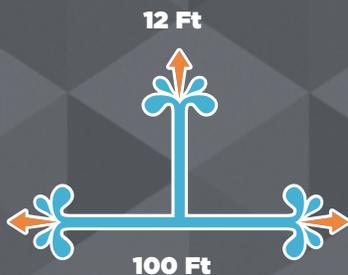

AN EASY SOLUTION FOR A REMOTE SHOWER OR SINK INSTALLATION OR FOR ANY GRAY WATER APPLICATION


Easy to install and small enough to fit underneath a shower base. Ideal for **medium duty applications**.

Pre-assembled system with a **low inlet and built-in check valve**. Typical installations include the discharge of gray water from **showers, sinks and pedicure chairs**.




TECHNICAL SPECIFICATIONS

PLEASE CALL US TOLL-FREE AT
800-571-8191 (US) / 800-363-5874 (CDN)
 TO PURCHASE PARTS REFERENCED BELOW

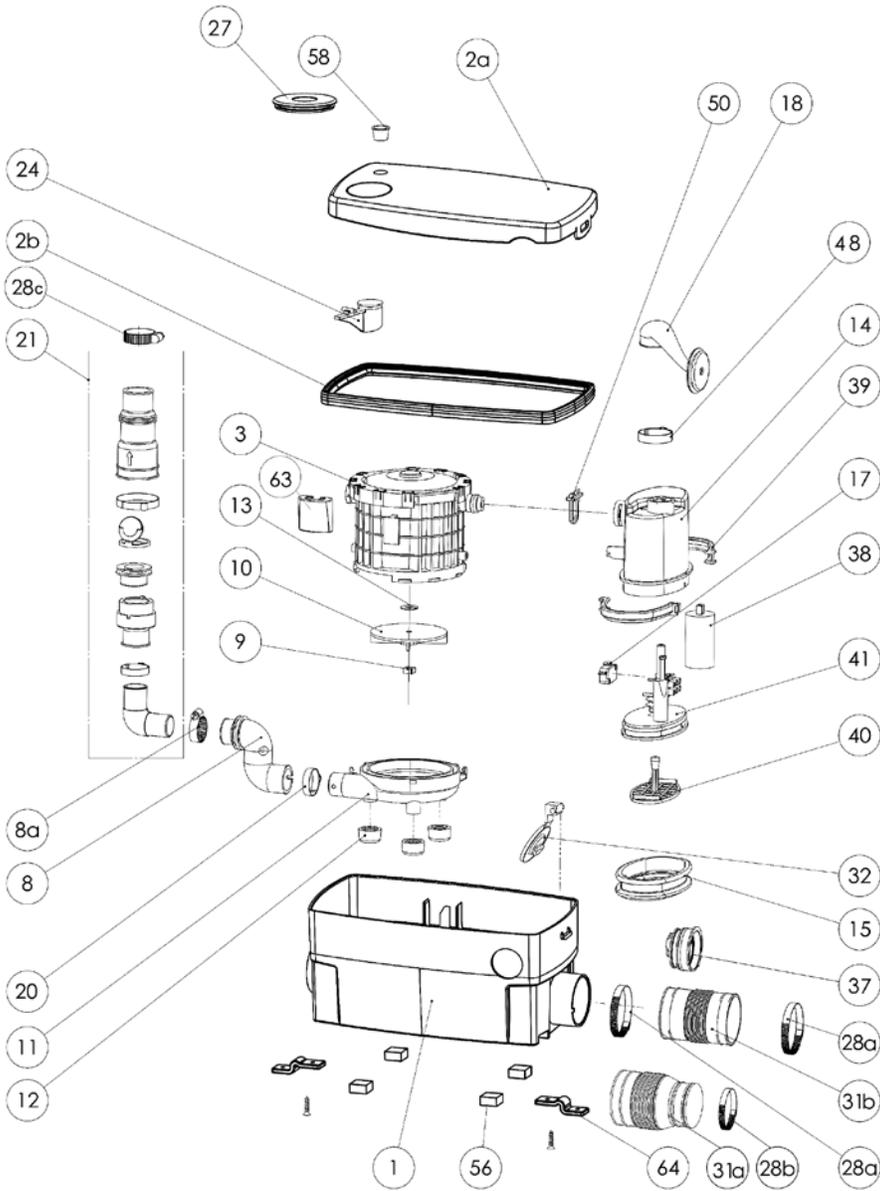

DIMENSIONAL DRAWINGS

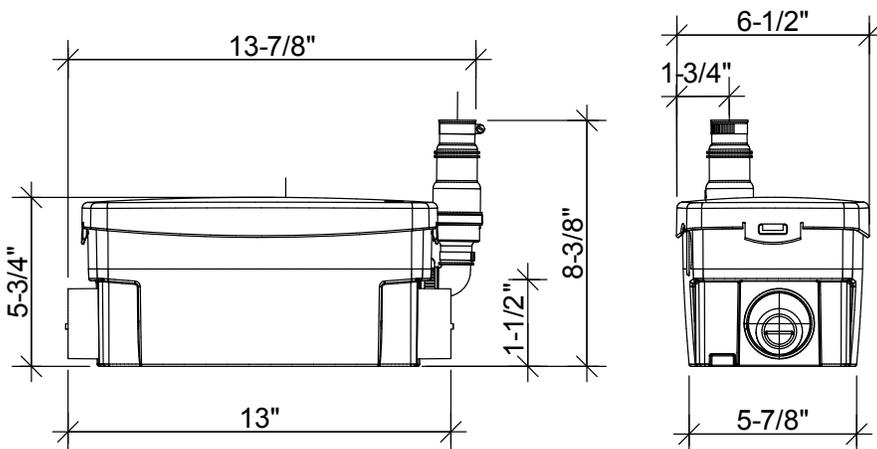

An easy and inexpensive solution for gray water applications!

TECHNICAL SPECIFICATIONS

Pump type:

Drain Pump

Electrical:

120 V - 60 Hz / 5.5 Amps (Max)

Motor:

0.2 HP oil-filled thermally protected motor

Capacitor rating:

25 microfarad

Operating Temperature:

104°F (110°F Max.)

Power cord length:

48-1/2"

Noise level:

≤ 44 dBA (Lp) (measured at 3 ft.)

Discharge pipe diameter:

3/4" or 1"

Discharge rate at 12 ft:

14 GPM

Discharge rate at 3 ft:

20 GPM

Shut-off head:

26 ft.

Normal running time:

3-5 seconds (Short bursts)

Capacity:

0.9 gallons / 3.4 liters

Inlets:

2" (sides))

Method of activation:

Membrane/microswitch

Shower/bathtub base height:

5" min

Weight:

12 lbs / 5.4 kg

Certifying agencies:

CSA (IPC, NSPC)

Recommended accessories:

Descaler

Connections:

Sink, shower

