
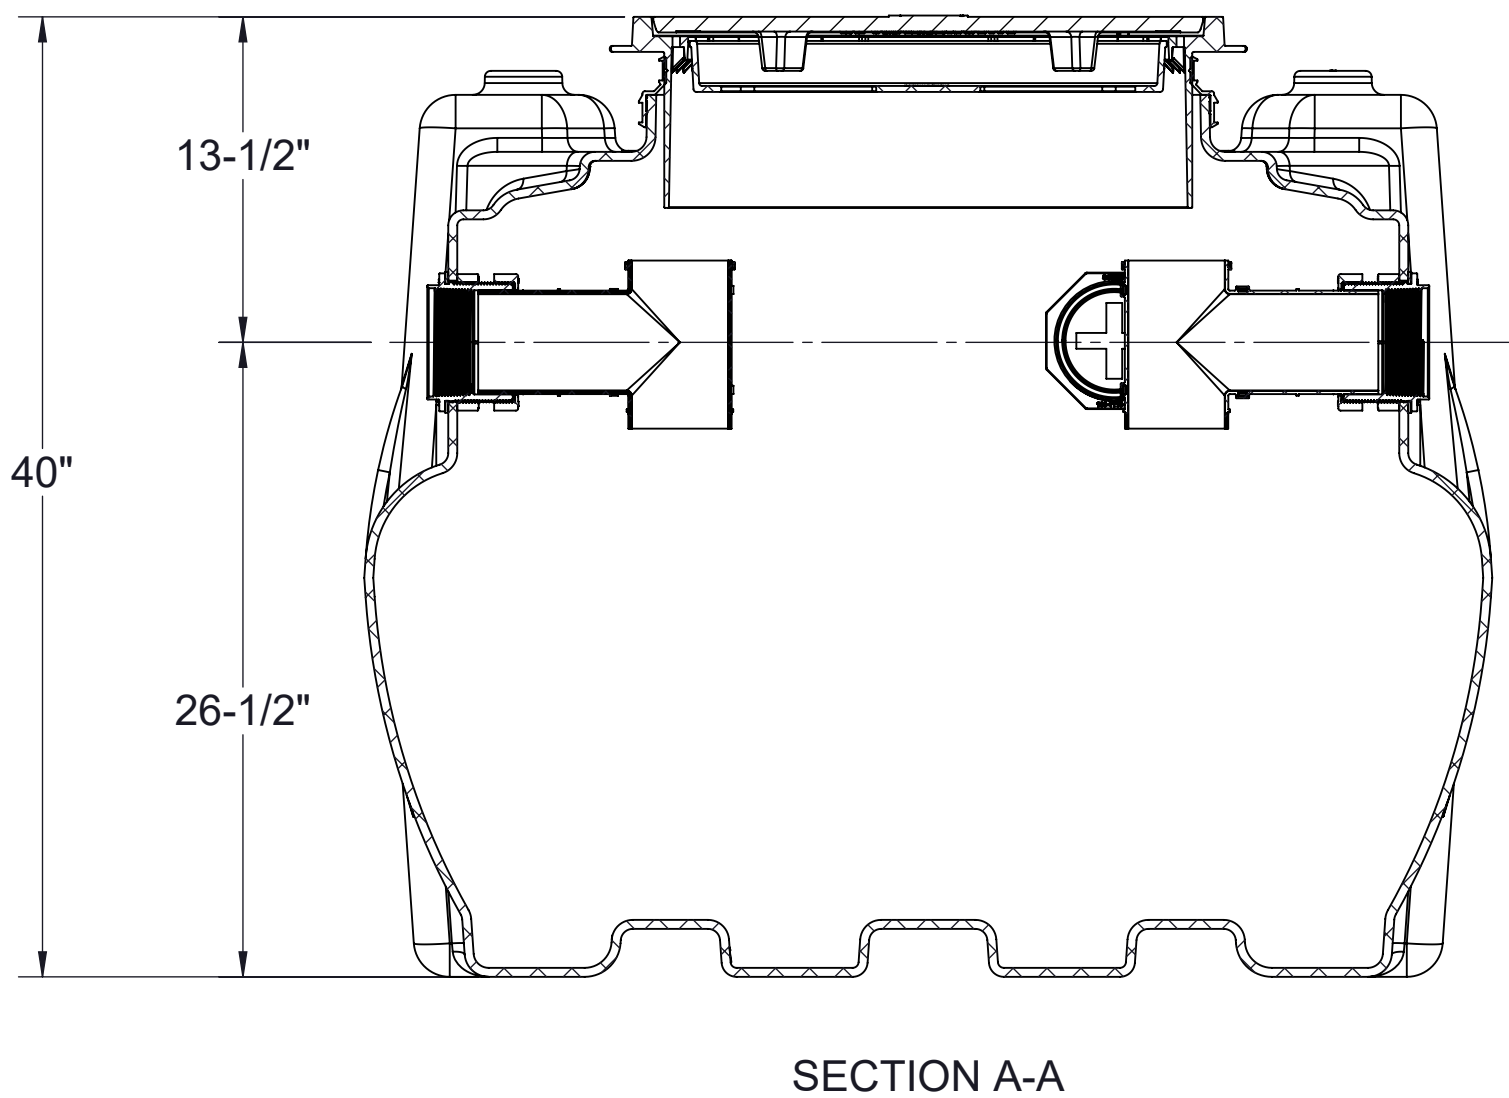



- SPECIFICATIONS**
- 1. 4" Plain/Female Inlet/Outlet
 - 2. Flow rate (4") = 125 GPM
 - 3. Liquid capacity: 125 Gallons
 - 4. Max solids/sediment capacity: 109 Gallons
 - 5. H-20 Load Rated Cast Iron Cover
 - 6. Seamless molded polyethylene tank.

- NOTES**
- 1. For gravity drainage applications only. Do not use for pressure applications.
 - 2. Unit supplied with built-in adapter(s) for up to 4" of adjustability. Additional riser(s) available for deeper burial depth.
 - 3. Cover placement allows full access to tank for proper maintenance.
 - 4. Narrow footprint allows clearance through doorways and down stairwells.
 - 5. Engineered outlet diffusers are removable to inspect/clean piping.
 - 6. Designed for below-grade, above-grade, indoor, or outdoor installations

- ACCESSORIES:**
- Field cut risers for extending covers to grade
 - High water anchor kit
 - Pumpout Port Kit
 - Cover adapter tie down kit
 - Membrane clamping collar kit

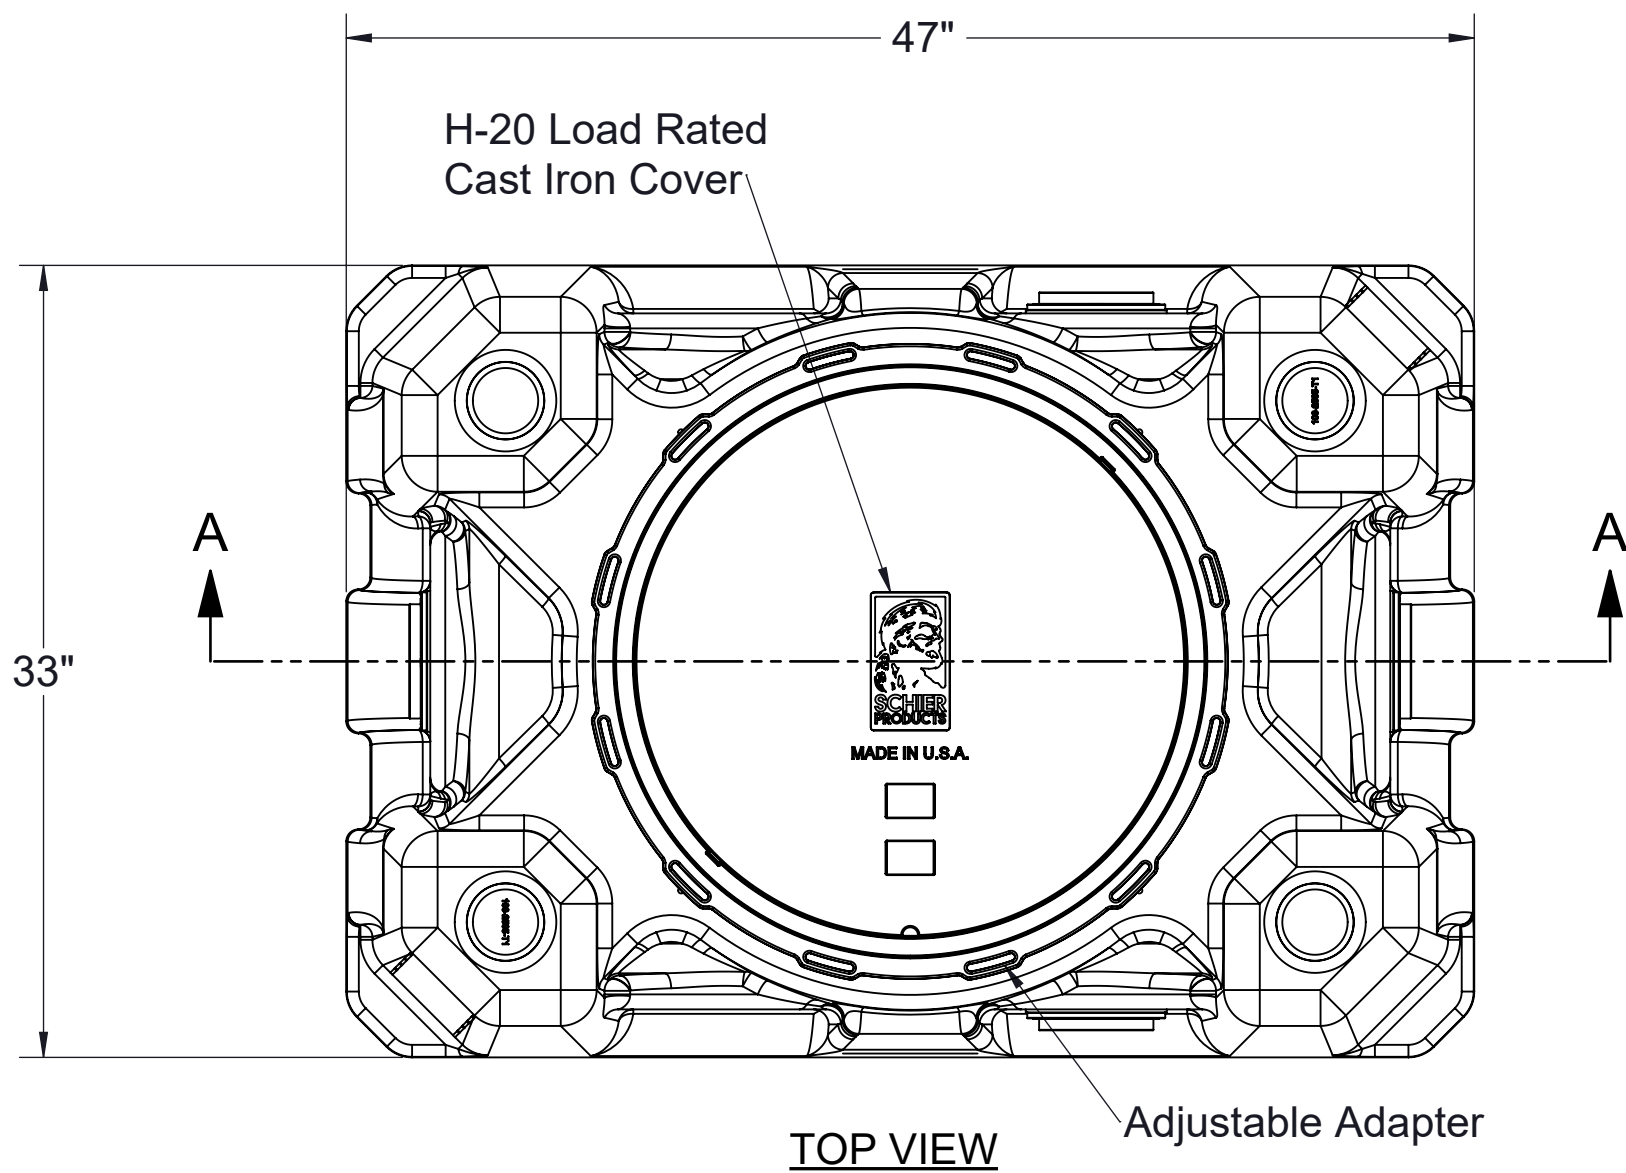

SPECIFICATION SHEET

<div>MODEL NUMBER:</div> <div>SI-75</div> <div>PROPRIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SCHIER PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SCHIER PRODUCTS IS PROHIBITED.</div>	<div>PART NUMBER: 5045-002-01</div>				<div>SCHIER</div> <div>6455 Woodland Dr Shawnee, KS 66218 Tel: 913-951-3300 Fax: 913-951-3399 schierproducts.com</div>
	<div>DESCRIPTION:</div> <div>SOLIDS INTERCEPTOR, 125 LIQUID GALLONS, 109 GALLON SOLIDS CAPACITY, 4" PLAIN/FEMALE INLET/OUTLET, H-20 RATED CAST IRON COVER</div>				
	<div>DWG BY:</div> <div>B.BROWN</div>	<div>DATE:</div> <div>6/2/2022</div>	<div>REV:</div> <div>-</div>	<div>ECO:</div> <div>-</div>	