## **NOTES**


- 1. 4" plain/female inlet/outlets
- 2. Unit weight 112 lbs.
- 3. Maximum operating temperature: 150° F continuous
- 4. Offset connections
- H-20 load rated cast iron cover
- Safety Star™, access restrictor built into each cover adapter, prevents accidental entry to tanks (450 lb rating)

## **ENGINEER SPECIFICATION GUIDE**


Schier Sewer Viewer™ sampling port model # SV24-O shall be lifetime guaranteed and madein USA of seamless, rotationally-molded polyethylene. Sampling port shall be furnished for above or below grade installation with Safety Star™ access restrictor built into cover adapter. Cover shall provide water/gas-tight seal and have minimum 16,000 lbs. load capacity.

## **ACCESSORIES:**


- Field Cut Risers for extending covers to grade
- Cover adapter tie down kit
- Membrane clamping collar kit

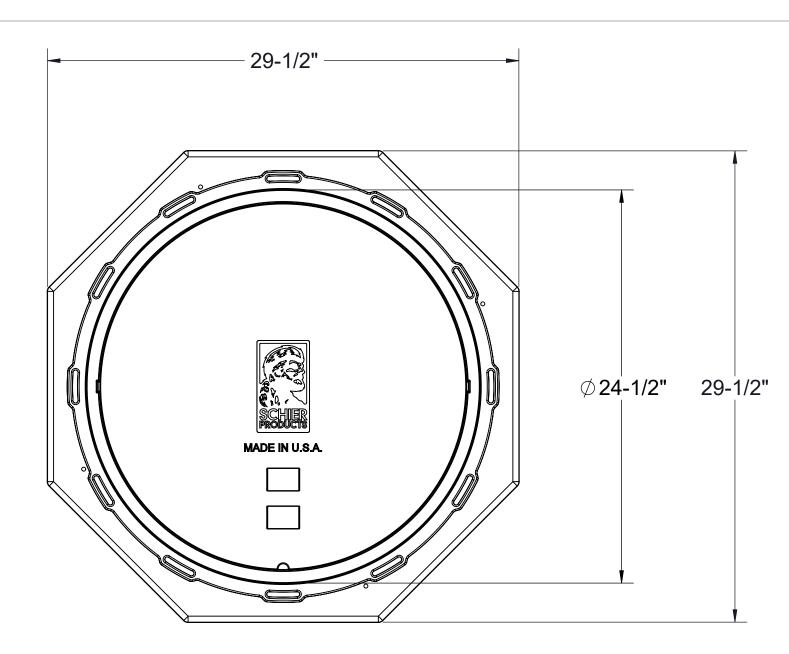




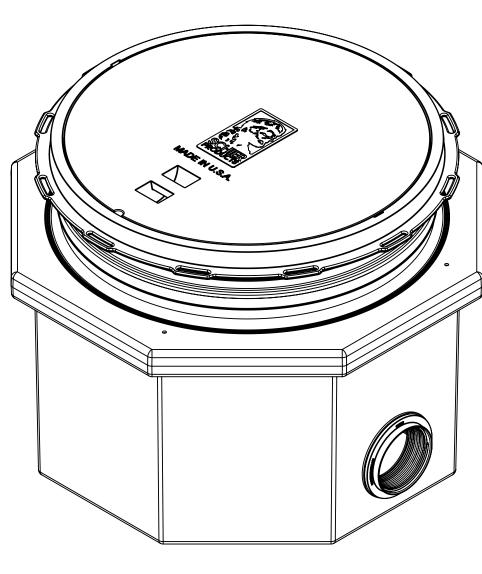

**Iso View** 

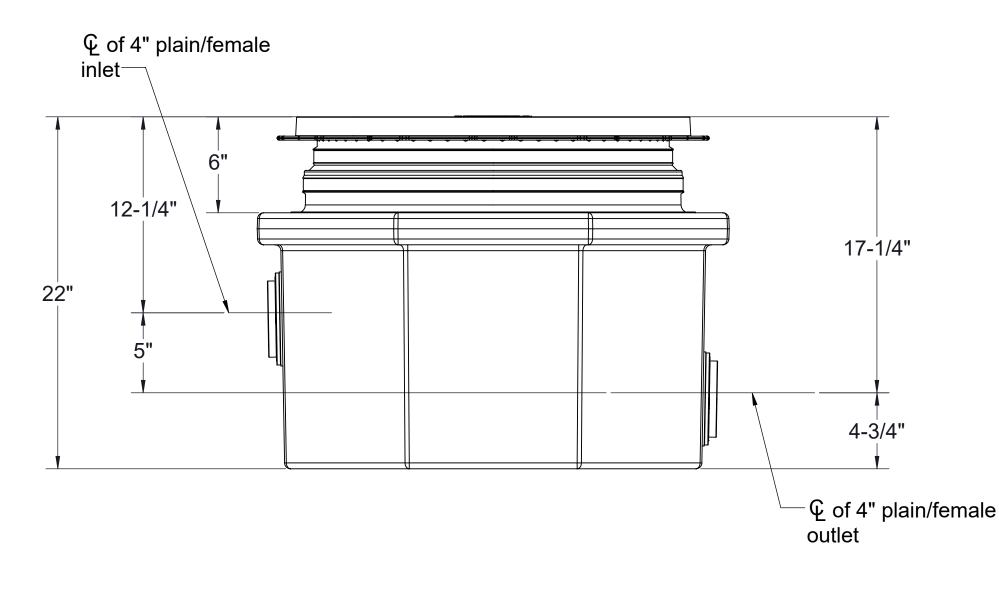

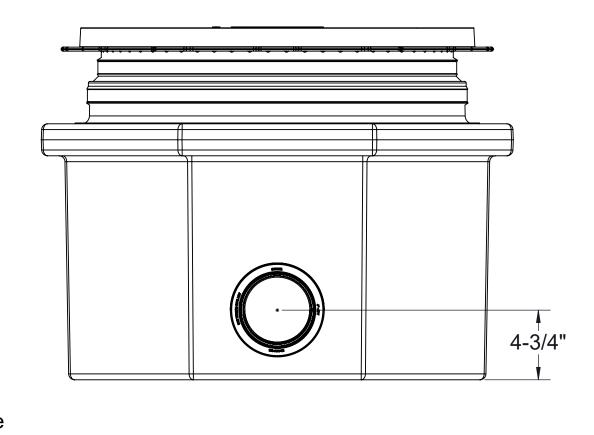

Side View

**Outlet End View** 

## **SPECIFICATION SHEET**

**MODEL NUMBER:** 

SV24-0

**PART NUMBER:** 

8062-003-03

**DESCRIPTION:** 

SV24-O SEWER VIEWER SAMPLING PORT, 4" OFFSET CONNECTIONS, H-20 LOAD RATED CAST IRON COVER

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **SCHIER PRODUCTS**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **SCHIER PRODUCTS** IS PROHIBITED.

DWG BY:

**B.BROWN** 

DATE:

6/6/2022

REV:

ECO:



SCHIER

6455 Woodland Dr Shawnee, KS 66218 Tel: 913-951-3300 Fax: 913-951-3399 schierproducts.com