


Pyramid Universal Support

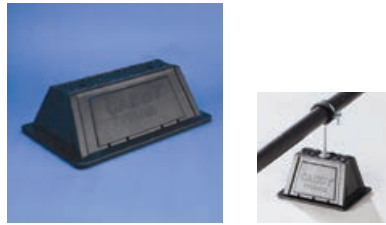

- Captive stainless steel nuts allow for custom attachment methods to the support base including easy attachment of stainless steel strut, threaded rod or other project-specific hardware
- Foam bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Base is manufactured from UV-stabilized thermoplastic material
- Supports green building requirements; thermoplastic bases are made from recycled material and can contribute to earning LEED credits

Material: Polyethylene; Polypropylene; Stainless Steel 18-8

Temperature : -50 to 150°F

Static Load Safety Factor: 3:1

Part Number	Length	Width	Height	Thread Size	Ultimate Static Load
PBU6	8"	6"	4"	(3) 3/8"-16	300
PBU10	12 1/2"	8"	4"	(2) 3/8"-16	1,000
PBU16	19"	8"	4"	(2) 3/8"-16	1,500



Pyramid 25 Pipe and Conduit Support



- Lightweight plastic construction
- UV resistant, designed and tested for outdoor use
- No tools or fasteners needed for installation
- Rounded edges to help protect the roof membrane

Material: Acrylonitrile Butadiene Styrene

Part Number	Height	Static Load
PPRPS25H4	3 5/8"	25 lb
PPRPS25H6	5 5/8"	25 lb

"The Pyramid family allows us to streamline our project operations while delivering an aesthetically pleasing product for our clients."

Kyle Laubach, VP of Operations
Environmental Roofing and Waterproofing