



# NVENT CADDY SLICK NUT, POLYAMIDE, SPRING STEEL, 1/2" HOLE, THREADED

## CATALOG NUMBER

**SLICK500**



## FEATURES

Provides fast universal attachment of threaded rod and hardware to standard strut profiles

## PRODUCT ATTRIBUTES


Material: Polyamide;Spring Steel
Finish: nVent CADDY Armour
Hole Size: 1/2"
Hole Type: Threaded
Height: 11/16"
Torque: 10 ft lb
Static Load 1: 600 lb
Static Load 2: 100 lb
Static Load 3: 250 lb

## ADDITIONAL PRODUCT DETAILS

Indicated loads are independent of the threaded stud or rod.

Indicated loads are applicable on 14 GA and 12 GA (2 mm and 2.5 mm) strut channels only.

DIAGRAMS

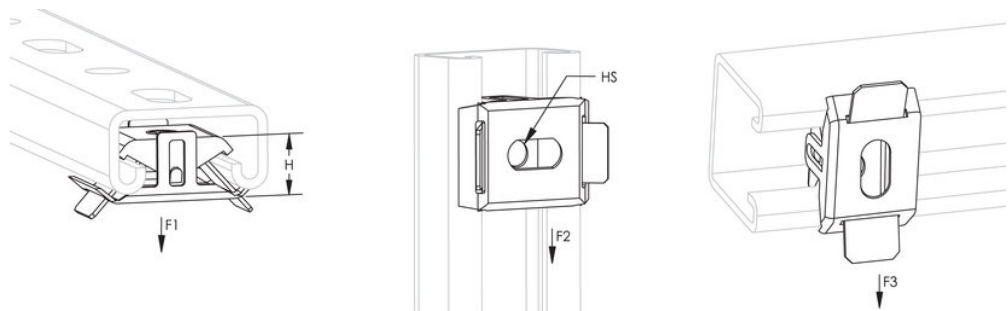

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical Support

Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:  
[nVent.com](http://nVent.com) CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER