


# 216 x 280 mm



Water Resistant




**COMMERCIAL WEAR LAYER**  
for extra durability and scratch resistance

**EXTRA STABLE CORE**  
60% more stable vs standard laminate

**EDGE SEALER**  
protecting core against humidity

**EXTRA STRONG CLICK**  
5X the contact points vs standard laminate

- ◆ **Wet and steam moppable** for easy maintenance
- ◆ **Install in rooms up to 4000 sq. ft. without transitions** (66' x 66') including doorways.
- ◆ Suitable for **every room**
- ◆ **Easy-to-install** tap down click system
- ◆ **AC4** durable wear layer
- ◆ **Pet-friendly** - extra stain and scratch resistant

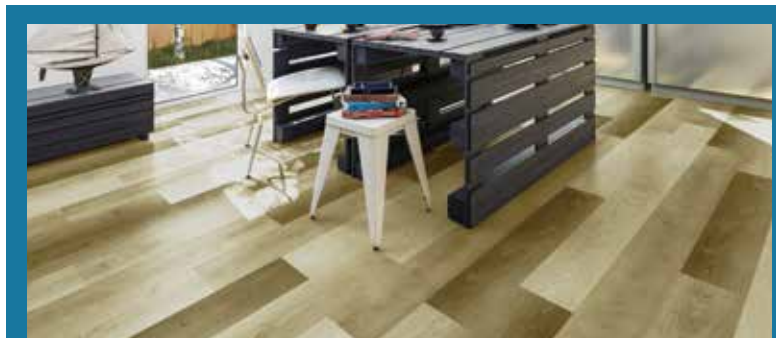

Color Name	Size"	Thickness(mm)	Pcs	SF / CTN	SKU
Toasted Cheyenne	7.7 X 47.75	10.0	8	20.49	55542064
Cottage Gray	7.7 X 47.75	10.0	8	20.49	55542063

**Product Dimensions:**

- Thickness: 10mm
- Width: 7.7" (196mm)
- Length: 47.75" (1213mm)

**Product Specifications:**

- 8 planks / 20.49sq.ft per carton
- Can install 66 lineal ft without any transition moldings!

**Acclimation:**

Keep the boards in room temperature for at least 48 hours in unopened package before you start the installation. The room temperature must be between 18° and 25°C (65-78°F) before and during installation. Relative humidity levels of your room should be maintained at 30-65%.

**Expansion:**

1/2" (10mm) around perimeter of room

**Joint Stagger:**

Minimum of 12 inches (30cm)

**Maintenance:**

- Sweep or vacuum using soft bristle attachments
- Wet and residential steam mopping allowed (see instructions for details)

**Radiant in Floor Heat:**

Only use embedded water floor heating systems

**Subfloor:**

- Needs to be level to 3/16" (5mm) within a 10-foot (3m) span
- Concrete (CEM) moisture level should be a maximum of 2.5%
- May be installed in any room or grade (except for sunrooms that have no heating or AC unit)

**Tools Required:**

Spacers, rubber mallet, ruler, pencil, tape measure, utility knife



**CFL CUSTOMER SERVICE LINE: 888-271-3859**

# 216 x 280 mm



## PLEASE READ CAREFULLY

Thank you for purchasing our flooring product. We have included some helpful hints to ensure that your flooring is installed properly.

- **DO** leave an expansion gap of 1/2" (10 mm) around the perimeter of the room.
- **DO** avoid excessive wetting and remove water spillages immediately. Although this product has been designed with bathroom installation in mind it is NOT waterproof and at no time should standing water be left on the floor.
- **DO** occasionally wet mop you floor, using a well wrung out mop, **DO NOT** pour liquid directly on the floor
- **DO NOT** allow puddles of water and or topical moisture to stay on the floor longer than 30 hours
- **DO** use residential steam mops on the lowest setting, **DO NOT** hold steam mop on one spot for extended period
- **DO** the perimeter of any wet room or room that will be wet- or steam mopped with a silicone sealant
- **DO** work out of more than one carton at a time when installing the flooring planks. This will ensure a more natural look!
- **DO** make sure your subfloor is flat and level. Unlevel subfloors can cause the planks to become disengaged over time.
- **DO** use chair protectors and walk off mats to help prevent scratching. This is a high quality laminate floor that if maintained correctly, will last for years.
- **CAN** be installed over existing floors:
  - o Concrete: Concrete subfloors must be fully cured and should have minimum 6 mil (0.15mm) poly-film as a moisture barrier between the concrete subfloor and the flooring. If a moisture barrier is included in the underlayment, no additional moisture barrier is required.
  - o Tile: Make sure to level out your tile floor. If clicks overlap a grout line it may compromise the integrity of the click system, fill up grouts wider than 1/4" (6 mm) with a leveling compound when installing over tiles
  - o Wood: Be sure that wood floor is flat and stable. If noisy planks are present, fix them before installing the floor.
- **DO NOT** install over subfloors with non-embedded radiant heat.
- **DO NOT** install outside.
- **DO NOT** install over underlayments thicker than 2/16" (3 mm).

**CFL CUSTOMER SERVICE LINE: 888-271-3859**