


Activate energy savings with modern insulation technology.

Elastochem[®] 500 transforms your home into a comfortable and energy-efficient living space.

Elastochem 500 is a high performance spray foam insulation system that goes beyond traditional insulation in versatility, thermal values, and air sealing. During application, the product expands up to 120 times its initial volume, leaving no crack or crevice unfilled. While fiberglass batts and boardstock leave gaps that allow air to leak, Elastochem 500's open-cell formula insulates and air seals in one step to form an extremely tight barrier against heat loss in the winter, and protects cooled air from escaping in the summer.

Quality insulation plays a key role in sustainable home design. Our advanced spray foam system was created for eco-friendly living spaces—empowering homeowners to consume less, save more, and live more comfortably.

How does air escape?

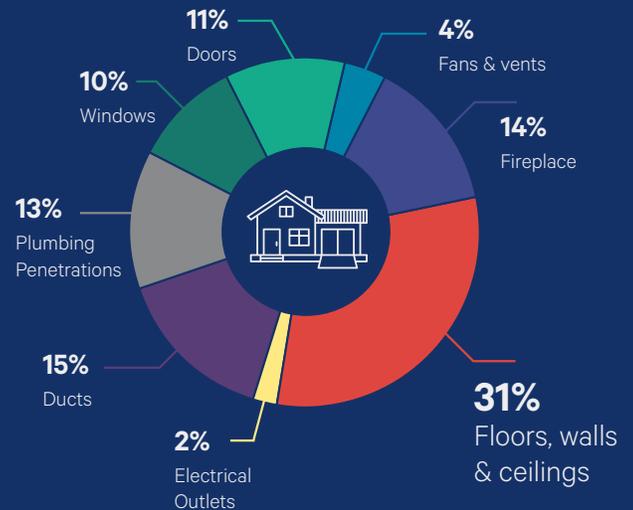

Source: Office of Energy Efficiency and Renewable Energy

Nearly **one third** of air infiltrates through the openings in ceilings, walls and floors in a home with fiberglass insulation.



Big Savings

Reduce your energy expenses by 30-50%



Water Blown

Eliminate harmful chemicals with a water-blown system



Noise Reduction

Minimize noise with a sound-absorbing formula



Market Value

Improve resale value with premium insulation

Attics

Insulate and air seal in one step to prevent air that's been heated or cooled from escaping. Air leaks into poorly insulated attics can account for 28% of heat loss.

Garages

Upgrade your garage to protect your home against temperature difference, odours, and noise—while keeping your above-garage living area comfortable year round.

Elastochem 500 | Technical Data

Attribute	Test	Results	Attribute	Test	Results
Density	ASTM D1622	0.45 Lb/ft ³ 6.80 kg/m ³	Tensile Strength	ASTM 1623	3.3 psi
Thermal Resistance (25mm Foam Depth)	ASTM C518	R 3.5 RSI 0.61	Water Absorption (% Volume)	ASTM D2842	17.4%
Water Vapour Transmission	ASTM E96 (Procedure A)	1580 ng/ (Pa·s·m ²)	Compressive Strength	ASTM 1621	N/A
Corner Wall Test	CAN/ULC-S127	315	VOC Emissions	CAN/ ULC-S774	1 day, pass
Flame Spread	CAN/ULC-S102 Steiner Tunnel	Flame 210 Smoke 195	Open Cell Content	ASTM D6226	100%
Dimensional Stability* (Volume Change after 28 days)	ASTM D2126	-29°C, -0.1% 80°C, 0.0% 70°C @ 95% RH, -0.1%	CCMC#		13655-R

All testing performed by an accredited independent third party test facility.
* Dimensional Stability was tested without a substrate



Elastochem Specialty Chemicals Inc.
37 Easton Road Brantford, ON N3P 1J4
1-877-787-2436
www.elastochem.com

