

UR5627 Polyurethane Resin

UR5627 is a low viscosity, fast curing polyurethane encapsulation resin specifically designed for the protection of delicate components.

- Flexible at temperature extremes; exhibits good adhesion to a wide variety of substrates
- Excellent electrical properties
- Excellent resistance to acids and alkalis
- Flame retardant meeting UL94 V-2 requirements

Approvals	RoHS Compliant (2015/863/EU):	Yes
	UL Approval:	No

Typical Properties

Liquid Properties	Base Material	Polyurethane
	Density Part A - Resin (g/ml)	1.01
	Density Part B - Hardener (g/ml)	1.25
	Part A Viscosity (mPa s @ 23°C)	1000
	Part B Viscosity (mPa s @ 23°C)	200
	Mixed System Viscosity (mPa s @ 23°C)	400
	Mix Ratio (Weight)	1.39:1
	Mix Ratio (Volume)	1.72:1
	Usable Life (20°C)	~20 mins
	Gel Time (23°C)	~30 mins
	Cure Time (23 °C)	24 hours
	Cure Time (60 °C)	1 hour
	Colour Part A - Resin	Clear
	Colour Part B - Hardener	Amber
	Storage Conditions	Dry Conditions: Above 20°C, Below 30°C
	Shelf Life	12 months
	Exotherm (Measured on 100ml sample in a cylinder of diameter 49.4mm @ 23°C)	< 60°C
	Shrinkage	< 1%

Copyright Electrolube 2013

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,
Ashby de la Zouch,
Leicestershire LE65 1JR

T +44 (0)1530 419 600

F +44 (0)1530 416 640


BS EN ISO 9001:2008
Certificate No. FM 32082

Cured System	Thermal Conductivity (W/m.K)	0.25
	Cured Density (g/ml)	1.10
	Temperature Range (°C)	-50 to +100
	Max Temperature Range (Short Term (°C)/2 hours) (Application and Geometry Dependent)	+110
	Max Temperature Range (Short Term (°C)/30 mins) (Application and Geometry Dependent)	+130
	Dielectric Strength (kV/mm)	~16
	Volume Resistivity (ohm-cm)	10 ¹⁰
	Shore Hardness @ 25°C	A50
	Colour (Mixed System)	Amber
	Flame Retardancy	Meets UL94 V-2
	Dissipation Factor @ 50 Hz	0.02
	Permittivity @ 50 Hz	4.90
	Water Absorption (9.7mm thick disk, 51mm diameter) 10 days @ 20°C / 1 hour @ 100°C	< 0.5% / <1%
	Glass Transition Temperature, Tg (°C)	-40
	Tear Resistance N/mm	0.70
	Elongation At Break	~100%
	Thermal Expansion Coefficient	75-100ppm

Mixing Procedures

Resin Packs

When in Resin pack form, the resin and hardener are mixed by removing the clip and moving the contents around inside the pack until thoroughly mixed. To remove the clip, remove both end caps, grip each end of the pack and pull apart gently. By using the removed clip, take special care to push unmixed material from the corners of the pack. Mixing normally takes from three to four minutes depending on the skill of the operator and the size of the pack. Both the resin and hardener are evacuated prior to packing so the system is ready for use immediately after mixing. The corner may be cut from the pack so that it may be used as a simple dispenser. There is also a YouTube video ([Polyurethane Mixing Instructions](#)) available on the Electrolube channel to show the mixing process.

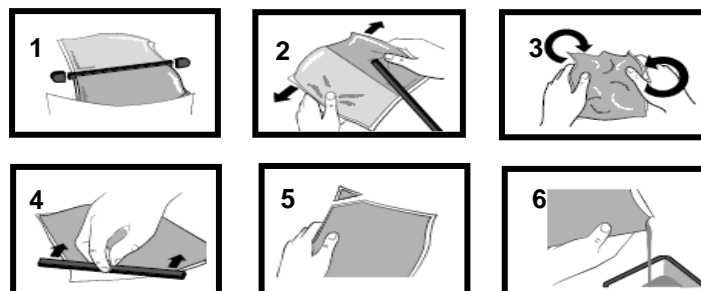

Bulk Mixing

When mixing, care must be taken to avoid the introduction of excessive amounts of air. Automatic mixing equipment is available which will not only mix both the resin and hardener accurately in the correct ratio but do this without introducing air. Containers of Part A (Resin) and Part B (Hardener) should be kept sealed at all times when not in use to prevent the ingress of moisture. Bulk material must be thoroughly mixed before use. Incomplete mixing or use of the wrong mix ratio will result in erratic or partial curing.

Additional Information

- Cleaning:** It is far easier for machines & containers to be cleaned before the resin has been allowed to cure. Electrolube's RRS is suitable for cleaning machines and containers and cured resin may be slowly softened and removed by soaking in our RRS.
- Curing:** Do not heat cure large volumes immediately. Allow these to gel at room temperature and post-cure at high temperature if required (refer to liquid properties for details). The material is not suitable for thick sections above 50mm as the exotherm build up during cure will create voids.
- Storage:** When storing under very cold conditions, the hardener may crystallise. If this occurs, simply warm (40°C) the container gently until all crystals have re-melted.
- Health & Safety:** Always refer to the Health & Safety data sheet before use. These can be downloaded from www.electrolube.com

Revision 4: Mar 2019