

## UR5096 Polyurethane Resin

UR5096 is a clear, high performance encapsulation resin based on urethane technology using a polyol unique in its characteristics. Due to the nature of this resin system it allows easy removal of cured material from broken or defective units and in most cases the clarity of the material allows the defect to be spotted without stripping the whole unit and the repair can then be localised.

- Clear system that can be removed from broken or defective units; allows easy inspection
- Very low water absorption and excellent low temperature flexibility to -60°C
- Excellent electrical properties; ideal for a variety of applications in harsh environments
- Low embedment stress; ideal for encapsulation of PCB's and delicate units

<b>Approvals</b>	<b>RoHS Compliant (2015/863/EU):</b>	<b>Yes</b>
	<b>UL Approval:</b>	<b>No</b>

### Typical Properties

Liquid Properties:	Base Material	Polyurethane
	Density Part A - Resin (g/ml)	0.94
	Density Part B - Hardener (g/ml)	1.13
	Part A Viscosity (mPa s @ 23°C)	1200
	Part B Viscosity (mPa s @ 23°C)	200
	Mixed System Viscosity (mPa s @ 23°C)	1000
	Mix Ratio (Weight)	8.13:1
	Mix Ratio (Volume)	9.85:1
	Usable Life (20°C)*	20 mins
	Gel Time (23°C)*	40 mins
	Cure Time (23°C)*	24hours
	Colour Part A - Resin	Clear
	Colour Part B - Hardener	Clear
	Storage Conditions	Dry Conditions: Above 15°C, Below 30°C
	Shelf Life	12 Months
	Exotherm	< 50°C
	(Measured on 100ml sample in a cylinder of diameter 49.4mm @ 20-25°C)	
	Shrinkage	< 0.5%


\*150g @ 21°C. Usable Life and Gel Times extend slowly on storage; the above times refer to freshly made material. After 6 months storage Usable Life is typically 35 minutes and Gel Time 80 minutes.

Cured System:	Thermal Conductivity (W/m.K)	0.20
	Cured Density (g/ml)	0.96
	Temperature Range (°C)	-60 to +100
	Max Temperature Range (Short Term (°C)/30 mins) (Application and Geometry Dependent)	+110 (Material may discolour)
	Dielectric Strength (kV/mm)	18
	Volume Resistivity (ohm-cm)	10 <sup>14</sup>
	Shore Hardness	A12
	Colour (Mixed System)	Clear
	Flame Retardancy	No
	Loss Tangent @ 50 Hz	0.02
	Permittivity @ 50 Hz	3.5

## Mixing Procedures

### Resin Packs

When in Resin pack form, the resin and hardener are mixed by removing the clip and moving the contents around inside the pack until thoroughly mixed. To remove the clip, remove both end caps, grip each end of the pack and pull apart gently. By using the removed clip, take special care to push unmixed material from the corners of the pack. Mixing normally takes from three to four minutes depending on the skill of the operator and the size of the pack. Both the resin and hardener are evacuated prior to packing so the system is ready for use immediately after mixing. The corner may be cut from the pack so that it may be used as a simple dispenser. There is also a YouTube video ([Polyurethane Mixing Instructions](#)) available on the Electrolube channel to show the mixing process.

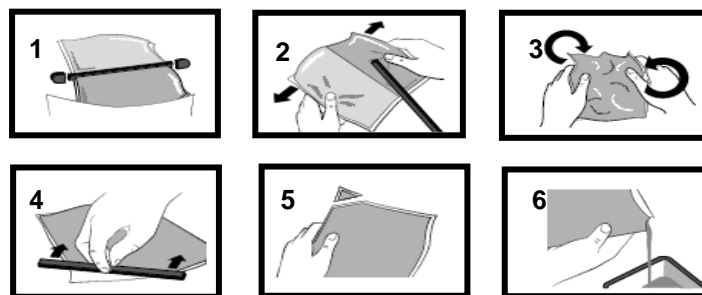

### Bulk Mixing

When mixing, care must be taken to avoid the introduction of excessive amounts of air. Automatic mixing equipment is available which will not only mix both the resin and hardener accurately in the correct ratio but do this without introducing air. Containers of Part A (Resin) and Part B (Hardener) should be kept sealed at all times when not in use to prevent the ingress of moisture. Bulk material must be thoroughly mixed before use. Incomplete mixing or use of the wrong mix ratio will result in erratic or partial curing.

### **Additional Information**

- Cleaning:** It is far easier for machines & containers to be cleaned before the resin has been allowed to cure. Electrolube's RRS is suitable for cleaning machines and containers and cured resin may be slowly softened and removed by soaking in our RRS.
- Curing:** Do not heat cure large volumes immediately. Allow these to gel at room temperature and post-cure at high temperature if required (refer to liquid properties for details). Small volumes (250ml) may be heat cured immediately.
- Storage:** When storing under very cold conditions, the hardener may crystallise. If this occurs, simply warm (40°C) the container gently until all crystals have re-melted.
- Health & Safety:** Always refer to the Health & Safety data sheet before use. These can be downloaded from [www.electrolube.com](http://www.electrolube.com)

Revision 3: Mar 2019

#### **Copyright Electrolube 2013**

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,  
Ashby de la Zouch,  
Leicestershire LE65 1JR

**T** +44 (0)1530 419 600

**F** +44 (0)1530 416 640

BS EN ISO 9001:2008  
Certificate No. FM 32082