



SIMPSON 'HUCQ412-SDS' HANGER (ZMAX COATING) WITH (14) $\frac{1}{4}$ "x2 $\frac{1}{2}$ " SDS FASTENERS TO FACE AND (6) $\frac{1}{4}$ "x2 $\frac{1}{2}$ " SDS FASTENERS TO JOIST. USE COMPATIBLE FASTENERS

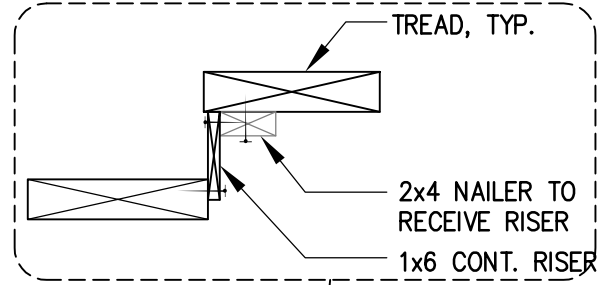

LANDING BEAM/HEADER, BY OTHERS

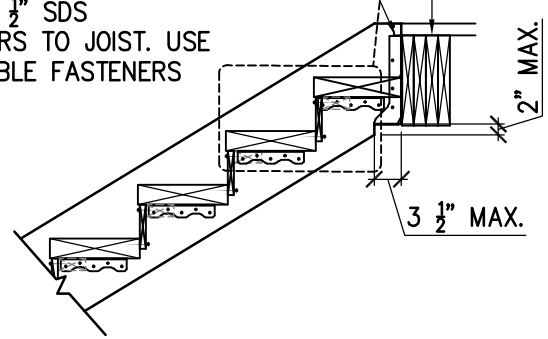

6
SSK-1


UP STRINGER TO WOOD HEADER

SCALE: $\frac{1}{2}$ " = 1'-0"

ATTACH TREADS TO STRINGERS WITH SIMPSON TA9Z STAIRCASE ANGLE. USE (3) $\frac{1}{4}$ " ϕ x 1 $\frac{1}{2}$ " SIMPSON SDS SCREWS INTO STRINGER AND (2) $\frac{1}{4}$ " ϕ x 1 $\frac{1}{2}$ " SDS SCREWS INTO TREADS

L2.5x2.5x $\frac{1}{4}$ " x 2.5" LONG WITH (1) $\frac{1}{2}$ " DIA. THRU BOLT TO STAIR STRINGER AND (1) $\frac{1}{2}$ " DIA. x 2 $\frac{1}{2}$ " SIMPSON SC STRONG-BOLT 2 TO CONCRETE SLAB

THICKENED SLAB ON GRADE, BY OTHERS

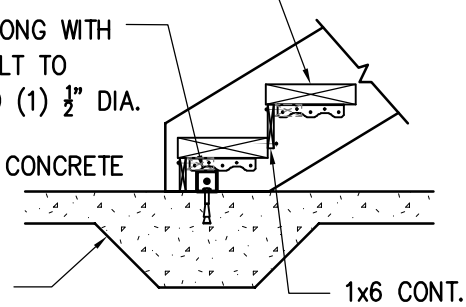

5
SSK-1

DOWN STRINGER TO CONCRETE SLAB

SCALE: $\frac{1}{2}$ " = 1'-0"