

NorthWoods Software

Program Name: Prop-W_BUu

Project Number: -

Project Description: -

Project Designer: Dik

Last Revised (yy-mm-dd): 21.11.26


Reference: NBCC, CSA S16

Disclaimer:

Created using SMath Studio, a MathCAD workalike from <https://en.smath.info/view/SMathStudio>. The User is responsible to verify data and calculations using an alternative method

Menu:

..... Input Data	 Important Output	 Logical Constructs	Blue Units
..... Sum / For	Red Important Note	Gray Temporary Variables	

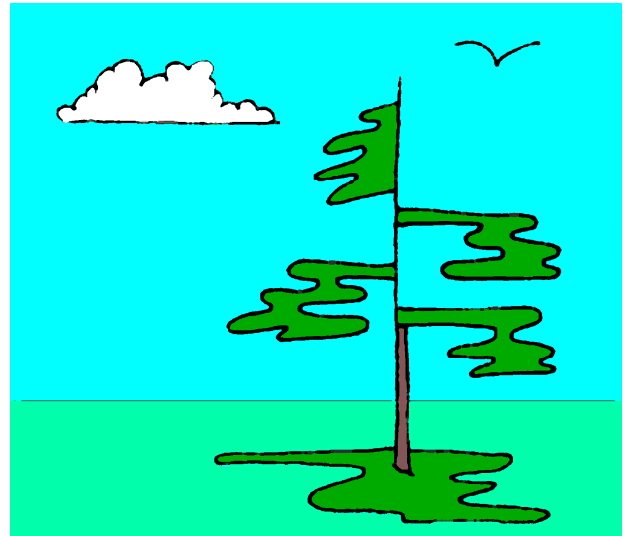

Input Data

$desI_W := \text{"Custom"}$

$desM_W := \text{"Custom"}$

$d_W := 15.1 \text{ in}$

$w_W := 1.25 \text{ in}$

$b_{1W} := 12.9 \text{ in}$

$t_{1W} := 2.07 \text{ in}$

$b_{2W} := 12.9 \text{ in}$

$t_{2W} := 2.07 \text{ in}$

$desI_W = \text{"Custom"}$

$desM_W = \text{"Custom"}$

$d_W = 15.10 \text{ in}$

$w_W = 1.25 \text{ in}$

$b_{1W} = 12.9 \text{ in}$

$t_{1W} = 2.07 \text{ in}$

$b_{2W} = 12.9 \text{ in}$

$t_{2W} = 2.07 \text{ in}$

$d_W = 383.5 \text{ mm}$

$w_W = 31.8 \text{ mm}$

$b_{1W} = 327.7 \text{ mm}$

$t_{1W} = 52.6 \text{ mm}$

$b_{2W} = 327.7 \text{ mm}$

$t_{2W} = 52.6 \text{ mm}$

Designation Imperial

Designation Metric

W Depth


W Web Thickness

W Bottom Flange Width

W Bottom Flange Thickness

W Top Flange Width

W Top Flange Thickness

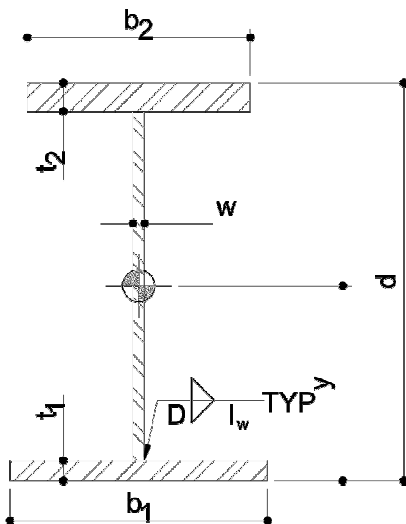

c

b

a

Section Properties:

$$A_W := b_{1W} \cdot t_{1W} + b_{2W} \cdot t_{2W} + \left(d_W - t_{1W} - t_{2W} \right) \cdot w_W$$

$$A_W = 67.11 \text{ in}^2$$

$$A_W = 43294 \text{ mm}^2$$

Area

$$wt_W := A_W \cdot \gamma_s$$

$$wt_W = 227.88 \text{ plf}$$

$$wt_W = 3.33 \text{ kNpm}$$

Weight per Unit Length

$$y_{wb} := \frac{t_{1W} \cdot b_{1W} \cdot \frac{t_{1W}}{2} + t_{2W} \cdot b_{2W} \cdot \left(d_W - \frac{t_{2W}}{2} \right) + w_W \cdot \left(d_W - t_{1W} - t_{2W} \right) \cdot \left(\frac{(d_W - t_{1W} - t_{2W})}{2} + t_{1W} \right)}{A_W}$$

$$y_{wb} = 7.55 \text{ in}$$

$$y_{wb} = 191.8 \text{ mm}$$

Depth to Bottom Fibre (X-Axis)

$$y_{wt} := d_W - y_{wb}$$

$$y_{wt} = 7.55 \text{ in}$$

$$y_{wt} = 191.8 \text{ mm}$$

Depth to Top Fibre (X-Axis)

$$x_W := 0.5 \cdot \max \left(\left[b_{1W} \ b_{2W} \ w_W \right] \right)$$

$$x_W = 6.45 \text{ in}$$

$$x_W = 163.8 \text{ mm}$$

Depth to Outer Fibre (Y-Axis)

$$Ix_{w1} := \frac{1}{12} \cdot \left(b_{1W} \cdot t_{1W}^3 + b_{2W} \cdot t_{2W}^3 + w_W \cdot (d_W - t_{2W} - t_{1W})^3 \right)$$

$$Ix_{w2} := Ix_{w1} + b_{1W} \cdot t_{1W} \cdot \left(y_{wb} - \frac{t_{1W}}{2} \right)^2 + b_{2W} \cdot t_{2W} \cdot \left(y_{wt} - \frac{t_{2W}}{2} \right)^2$$

$$Ix_W := Ix_{w2} + w_W \cdot \left(d_W - t_{1W} - t_{2W} \right) \cdot \left(y_{wb} - \left(\frac{d_W - t_{1W} - t_{2W}}{2} + t_{1W} \right) \right)^2$$

$$Ix_W = 2423.04 \text{ in}^4$$

$$Ix_W = 1.01 \cdot 10^9 \text{ mm}^4$$

Moment of Inertia (X-Axis)

$$Iy_W := \frac{1}{12} \cdot \left(t_{1W} \cdot b_{1W}^3 + t_{2W} \cdot b_{2W}^3 + (d_W - t_{1W} - t_{2W}) \cdot w_W^3 \right)$$

$$Iy_W = 742.39 \text{ in}^4$$

$$Iy_W = 3.09 \cdot 10^8 \text{ mm}^4$$

Moment of Inertia (Y-Axis)

$$Ip_W := Ix_W + Iy_W$$

$$Ip_W = 3165.43 \text{ in}^4$$

$$Ip_W = 1.32 \cdot 10^9 \text{ mm}^4$$

Moment of Inertia (Polar)

$$Sx_t := \frac{Ix_W}{y_{wt}}$$

$$Sx_t = 320.93 \text{ in}^3$$

$$Sx_t = 5.26 \cdot 10^6 \text{ mm}^3$$

Section Modulus (Top, X-Axis)

$$Sx_b := \frac{Ix_W}{y_{wb}}$$

$$Sx_b = 320.93 \text{ in}^3$$

$$Sx_b = 5.26 \cdot 10^6 \text{ mm}^3$$

Section Modulus (Bottom, X-Axis)

$$rx_W := \sqrt{\frac{Ix_W}{A_W}}$$

$$rx_W = 6.01 \text{ in}$$

$$rx_W = 152.6 \text{ mm}$$

Radius of Gyration (X-Axis)

$$ry_W := \sqrt{\frac{Iy_W}{A_W}}$$

$$ry_W = 3.33 \text{ in}$$

$$ry_W = 84.5 \text{ mm}$$

Radius of Gyration (Y-Axis)

$$Sy_W := \frac{Iy_W}{x_W}$$

$$Sy_W = 115.10 \text{ in}^3$$

$$Sy_W = 1.89 \cdot 10^6 \text{ mm}^3$$

Section Modulus (X-Axis)

$$Zx_{w1} := b_{2W} \cdot t_{2W} \cdot \left(y_{wt} - \frac{t_{2W}}{2} \right) + b_{1W} \cdot t_{1W} \cdot \left(y_{wb} - \frac{t_{1W}}{2} \right)$$

$$Zx_{w1} = 347.94 \text{ in}^3$$

$$Zx_{w1} = 5.70 \cdot 10^6 \text{ mm}^3$$

$$Zx_W := Zx_{w1} + w_W \cdot \frac{(y_{wt} - t_{2W})^2}{4} + w_W \cdot \frac{(y_{wb} - t_{1W})^2}{4}$$

$$Zx_W = 366.71 \text{ in}^3$$

$$Zx_W = 6.01 \cdot 10^6 \text{ mm}^3$$

Plastic Section (X-Axis)

$$Z_{Y_W} := t_{1W} \cdot \frac{b_{1W}^2}{4} + t_{2W} \cdot \frac{b_{2W}^2}{4} + \left(d_W - t_{1W} - t_{2W} \right) \cdot \frac{w_W^2}{4}$$

$$Z_{Y_W} = 176.52 \text{ in}^3 \quad Z_{Y_W} = 2.89 \cdot 10^6 \text{ mm}^3$$

Plastic Section (X-Axis)

$$C_{W_W} := \frac{\left(d_W - \left(\frac{t_{1W} + t_{2W}}{2} \right) \right)^2 \cdot \left(\frac{b_{1W} + b_{2W}}{2} \right)^3 \cdot \left(\frac{t_{1W} + t_{2W}}{2} \right)}{24}$$

$$C_{W_W} = 31435.26 \text{ in}^6 \quad C_{W_W} = 8.44 \cdot 10^{12} \text{ mm}^6$$

Warping Constant

$$J_W := \frac{b_{1W} \cdot t_{1W}^3}{3} + \frac{b_{2W} \cdot t_{2W}^3}{3} + \frac{\left(d_W - t_{1W} - t_{2W} \right) \cdot w_W^3}{3}$$

$$J_W = 83.42 \text{ in}^4 \quad J_W = 3 \cdot 10^7 \text{ mm}^4$$

Torsional Constant

Class of Section

$$bt_1 := \frac{145}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$bt_1 = 8.325$$

b/t Ratio Class 1

$$bt_2 := \frac{170}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$bt_2 = 9.7603$$

b/t Ratio Class 2

$$bt_3 := \frac{200}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$bt_3 = 11.4827$$

b/t Ratio Class 3

$$dw_1 := \frac{1600}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$dw_1 = 91.8616$$

d/w Ratio Class 1

$$dw_2 := \frac{1700}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$dw_2 = 97.603$$

d/w Ratio Class 2

$$dw_3 := \frac{1900}{\sqrt{\frac{f_{y1}}{\text{MPa}}}}$$

$$dw_3 = 109.0857$$

d/w Ratio Class 3

```

if ( ( max ( ( ( ( ( b1W / (2 * t1W) ) ( b2W / (2 * t2W) ) ) ) ) ) ) <= bt1 ) ^ ( ( dW / wW <= dw1 ) )
  Class := 1
else
  if ( max ( ( ( ( ( b1W / (2 * t1W) ) ( b2W / (2 * t2W) ) ) ) ) ) ) ^ ( ( dW / wW <= dw2 ) )
    Class := 2
  else
    if max ( ( ( ( ( b1W / (2 * t1W) ) ( b2W / (2 * t2W) ) ) ) ) ) ^ ( ( dW / wW <= dw3 ) )
      Class := 3
    else
      Class := 4

```

Class = 1

```

if ( Class = 1 ) ^ ( Class = 2 )
  Mr := phi_s * ZxW * fy1
else
  Mr := phi_s * SxW * fy1

```

 $M_r = 1210.14 \text{ K_ft}$ $M_r = 1640.73 \text{ kN_m}$


Moment Resistance

c

Summary:

$$\phi_s = 0.90$$

$$f_{y1} = 44.00 \text{ Ksi}$$

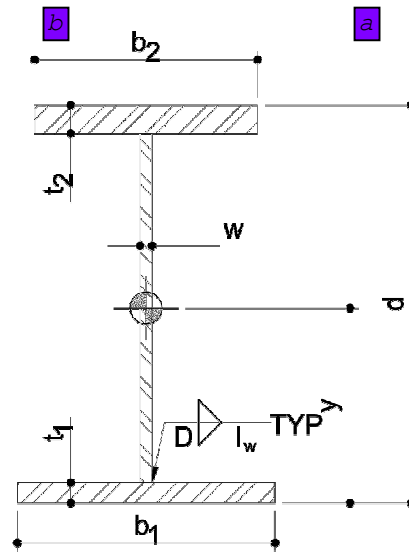**Section Properties**

Designation

 $desI_W = \text{"Custom"}$ $desM_W = \text{"Custom"}$

W Depth

 $d_W = 15.10 \text{ in}$ $d_W = 383.5 \text{ mm}$

W Web Thickness

 $w_W = 1.25 \text{ in}$ $w_W = 31.8 \text{ mm}$

W Bottom Flange Width

 $b_{1W} = 12.9 \text{ in}$ $b_{1W} = 327.7 \text{ mm}$

W Bottom Flange Thickness

 $t_{1W} = 2.07 \text{ in}$ $t_{1W} = 52.6 \text{ mm}$

W Top Flange Width

 $b_{2W} = 12.9 \text{ in}$ $b_{2W} = 327.7 \text{ mm}$

W Top Flange Thickness

 $t_{2W} = 2.07 \text{ in}$ $t_{2W} = 52.6 \text{ mm}$

Area

 $A_W = 67.11 \text{ in}^2$ $A_W = 43294 \text{ mm}^2$

Weight per Unit Length

 $wt_W = 227.88 \text{ plf}$ $wt_W = 3.33 \text{ kNpm}$

Moment of Inertia (X-Axis)

 $I_{x_W} = 2423.04 \text{ in}^4$ $I_{x_W} = 1.01 \cdot 10^9 \text{ mm}^4$

Section Modulus (X-Axis)

 $S_{x_t} = 320.93 \text{ in}^3$ $S_{x_t} = 5.26 \cdot 10^6 \text{ mm}^3$

Radius of Gyration (X-Axis)

 $rx_W = 6.01 \text{ in}$ $rx_W = 152.6 \text{ mm}$

Plastic Section (X-Axis)

 $Z_{x_W} = 366.71 \text{ in}^3$ $Z_{x_W} = 6.01 \cdot 10^6 \text{ mm}^3$

Moment of Inertia (Y-Axis)

 $I_{y_W} = 742.39 \text{ in}^4$ $I_{y_W} = 3.09 \cdot 10^8 \text{ mm}^4$

Section Modulus (Y-Axis)

 $S_{y_W} = 115.10 \text{ in}^3$ $S_{y_W} = 1.89 \cdot 10^6 \text{ mm}^3$

Radius of Gyration (Y-Axis)

 $ry_W = 3.33 \text{ in}$ $ry_W = 84.5 \text{ mm}$

Plastic Section (Y-Axis)

 $Z_{y_W} = 176.52 \text{ in}^3$ $Z_{y_W} = 2.89 \cdot 10^6 \text{ mm}^3$

Moment of Inertia (Polar)

 $I_{p_W} = 3165.43 \text{ in}^4$ $I_{p_W} = 1.32 \cdot 10^9 \text{ mm}^4$

Warping Constant

 $C_{w_W} = 31435.26 \text{ in}^6$ $C_{w_W} = 8.44 \cdot 10^{12} \text{ mm}^6$

Torsional Constant

 $J_W = 83.42 \text{ in}^4$ $J_W = 3 \cdot 10^7 \text{ mm}^4$

Class of Section

 $Class = 1$

Moment Resistance

 $M_r = 1210.14 \text{ K_ft}$ $M_r = 1640.73 \text{ kN_m}$