


VOLA 100, 100X, 200M, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction
Montageanleitung
Monteringsvejledning


Monteringsvægledning
Montage hanleiding
Manuel de montage

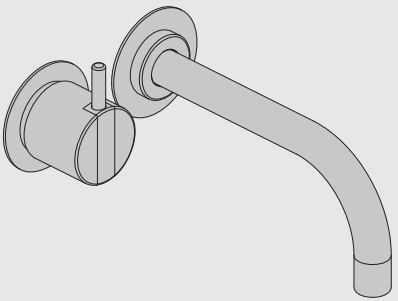

VA 1.42/18612, VA 1.42/18613, VA 1.42/18614,
VA 1.42/18615, VA 1.42/18616, VA 1.42/18617

www.vola.com

vola

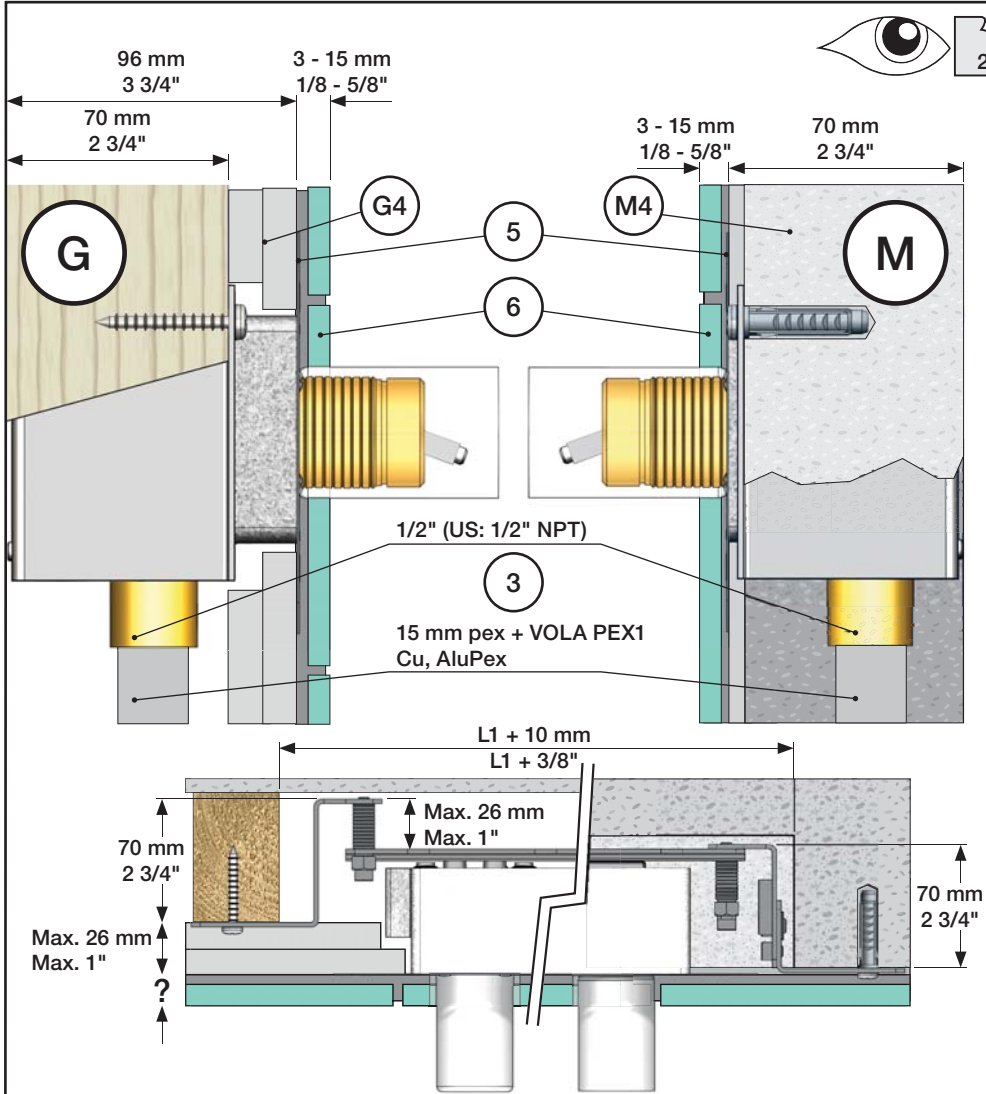

Data, 3 Bar:

	l/min.	Gal/min.
100:	18,3	4.8
400V:	15,6	4.1
2100:	25,2	6.7
2400V:	22,2	5.9

Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Recommended operating pressure:

Empfohlener Betriebsdruck:

Anbefalet driftstryk:

Rekommenderat arbetstryck:

Aanbevolen werkdruk:

Pression de fonctionnement recommandée:

2 - 5 Bar
29 - 72.5 psi

Extension
Verlängerung

Forlængerdele
Förlängning


Verlengstukken
Modification

100/200/300/400		VR1254		VR1400		VR2019
Tiles: Fliesen: Fliser: Tegels: Carreaux:	3 - 15 mm	Std.	+	Std.	+	Std.
	15 - 25 mm	+10		+10		+10
	25 - 35 mm	+20		+20		+20
	35 - 45 mm	+30		+30		+30
	45 - 55 mm	+40		+40		+40
	55 - 65 mm	+50		+50		+50


2100/2200/2300/2400			VR2250		VR1400		VR2019
Tiles: Fliesen: Fliser: Tegels: Carreaux:	3 - 15 mm	Std.	+	Std.	+	Std.	
	15 - 25 mm	+10		+10		+10	
	25 - 35 mm	+20		+20		+20	
	35 - 45 mm	+30		+30		+30	
	45 - 55 mm	+40		+40		+40	
	55 - 65 mm	+50		+50		+50	

Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation

52 - 0 mm

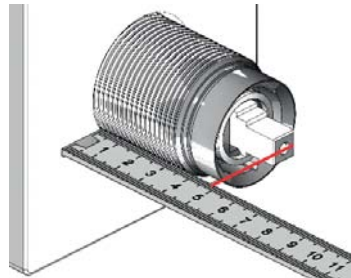


-15 - 0 mm



100/200/300/400		VR1254		VR1400		VR2019
	40 - 52 mm	Std.	+	Std.	+	Std.
	30 - 40 mm	+10		+10		+10
	20 - 30 mm	+20		+20		+20
	10 - 15 mm	+30		+30		+30
	0 - 10 mm	+40		+40		+40
	-10 - 0 mm	+50		+50		+50

2100/2200/2300/2400		VR2250		VR1400		VR2019
	35 - 47 mm	Std.	+	Std.	+	Std.
	25 - 35 mm	+10		+10		+10
	15 - 25 mm	+20		+20		+20
	5 - 15 mm	+30		+30		+30
	-5 - 5 mm	+40		+40		+40
	-15 - -5 mm	+50		+50		+50


A 200M

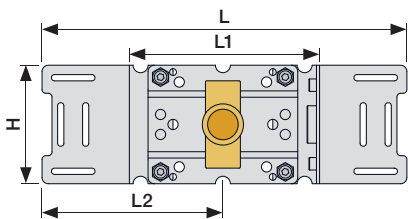


200: 200V + 200M
400: 400V + 2 x 200M
2400: 2400V + 2 x 200M
400N: 400NV + 200M
2400N: 2400NV + 200M
400T: 400TV + 200M
2400T: 2400TV + 200M
400F: 400FV + 200M
2400F: 2400FV + 200M
400R: 400RV + 200M
2400R: 2400RV + 200M

	L	L1	L2	L3	L4	L5	H	H1
A	295 mm 11 1/2"	160 mm 6 1/2"	145 mm 5 3/4"	-	-	-		-
B			129 mm 5"			-		120 mm 4 3/4"
B1	395 mm 15 1/2"	260 mm 10"	207 mm 8 1/8"					
B2			168 mm 6 5/8"	54 mm 2 1/8"	78 mm 3 1/16"			175 mm 6 7/8"
C	490 mm 19 1/2"	355 mm 14"	139 mm 5 1/2"			78 mm 3 1/16"		120 mm 4 3/4"
D	570 mm 23"	435 mm 17"				156 mm 6 1/8"		


B1 100X, 2100X

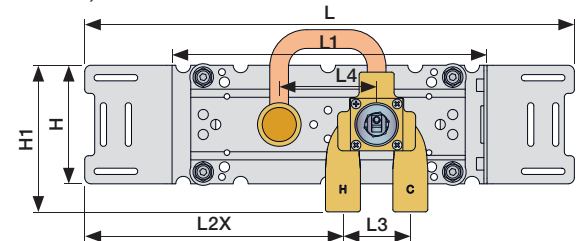


B2 300, 2300

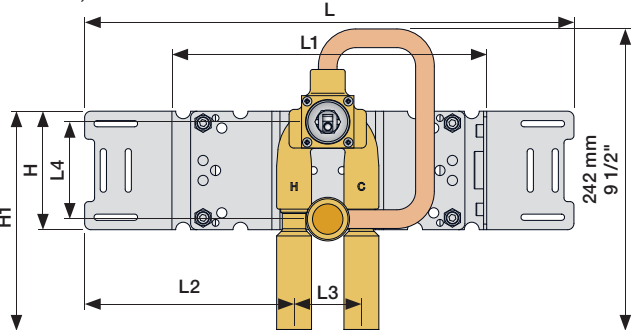

B 100, 2100, 200V, 2200V, 400V, 2400V

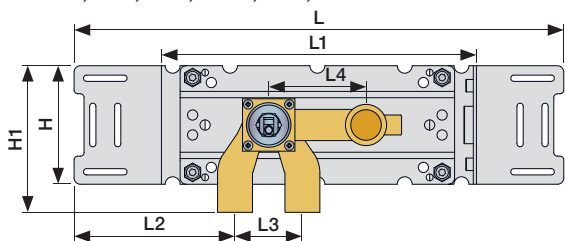

C 400NV, 2400NV, 400TV, 2400TV
D 400FV, 2400FV, 400RV, 2400RV

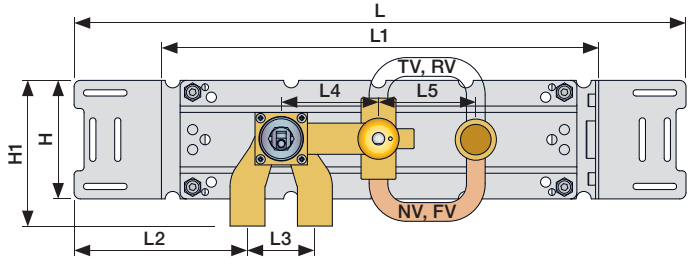


Fitting of extension
Montage von verlängerung


Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges


VR1254+

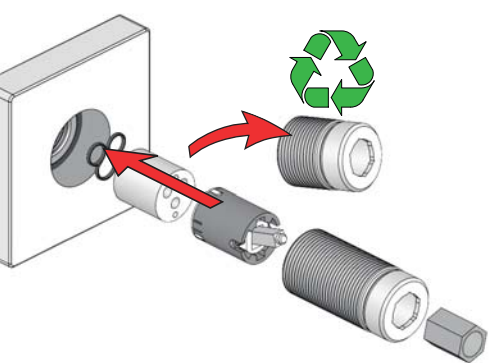


VR2250+










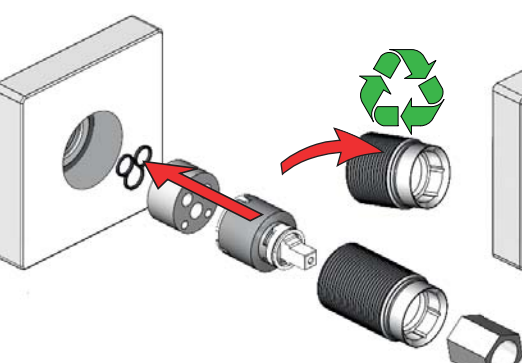


VR2019+, VR2119+

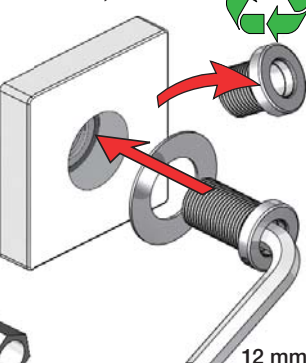


VR1400+

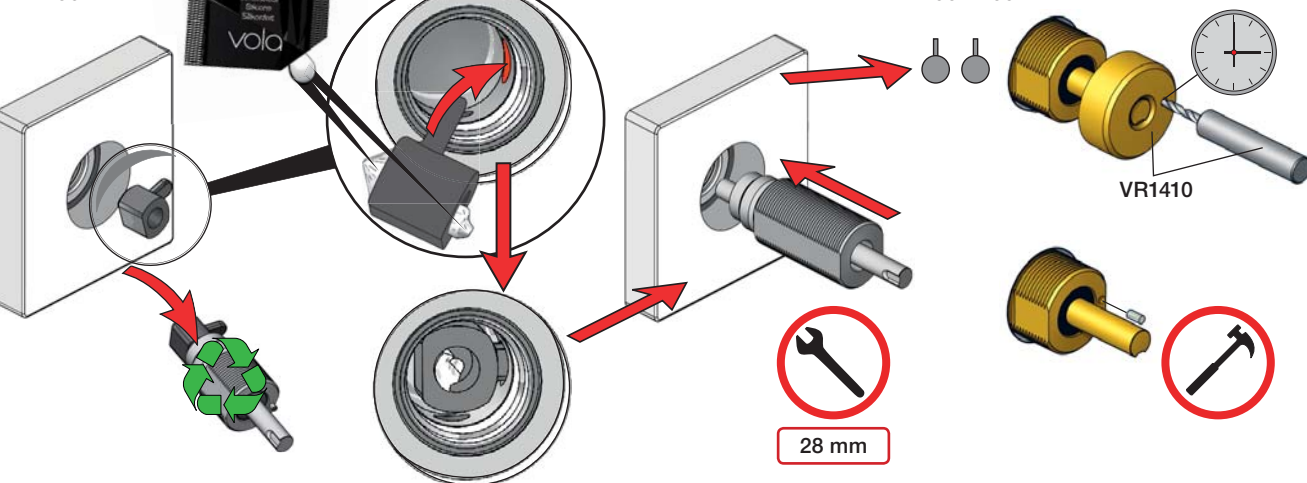

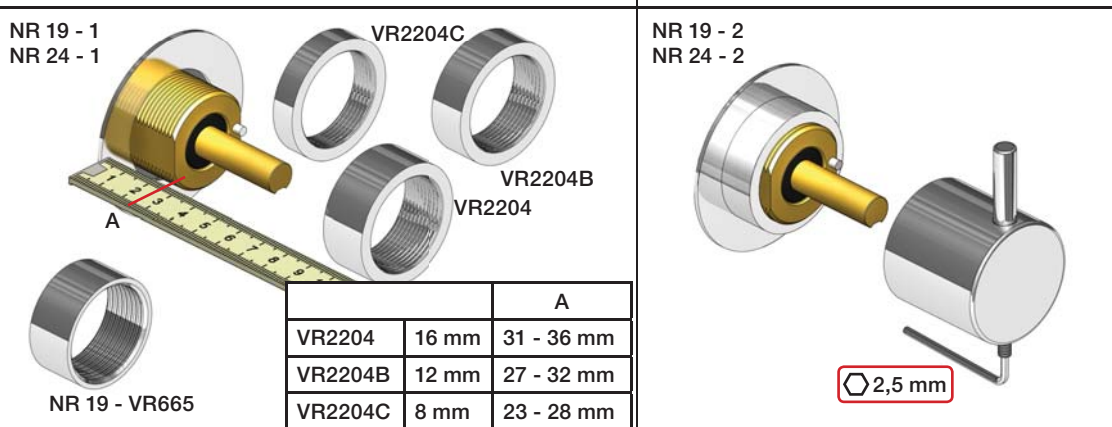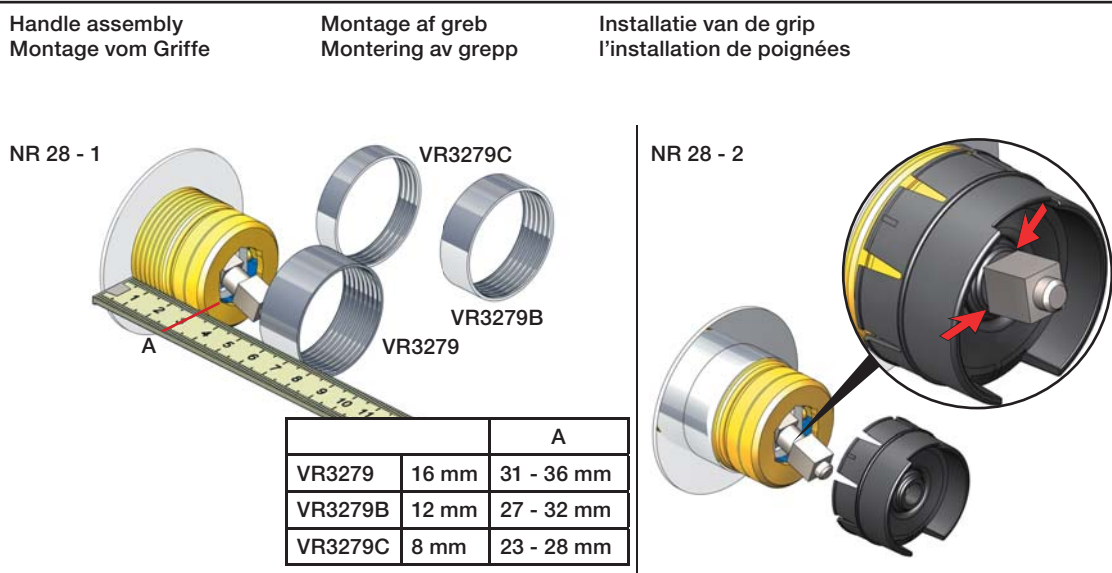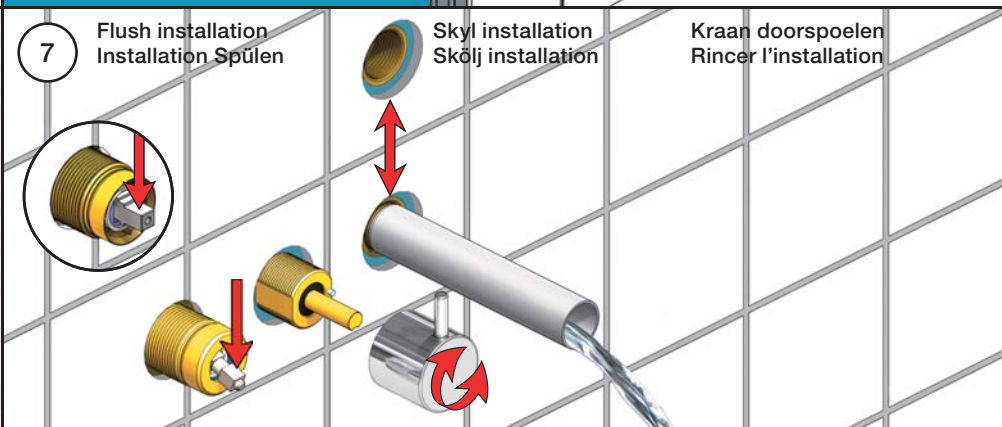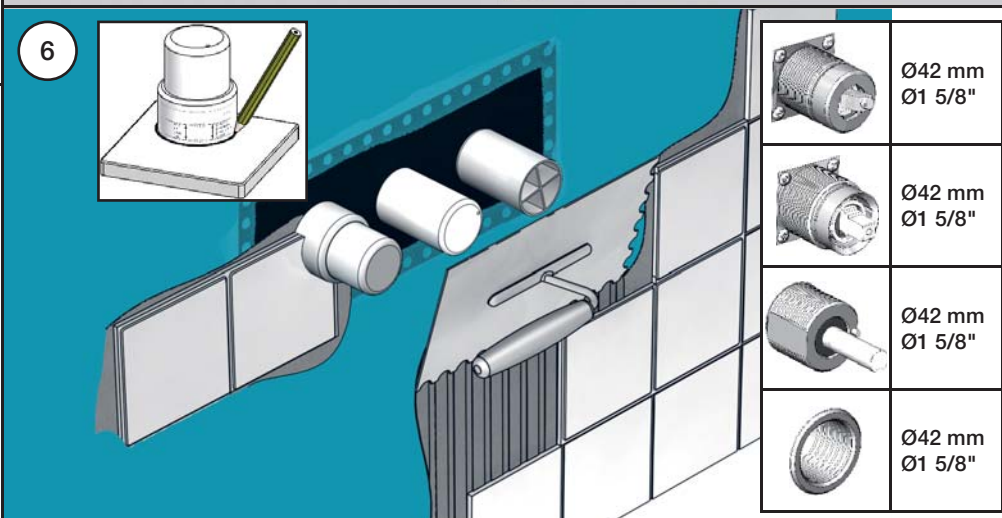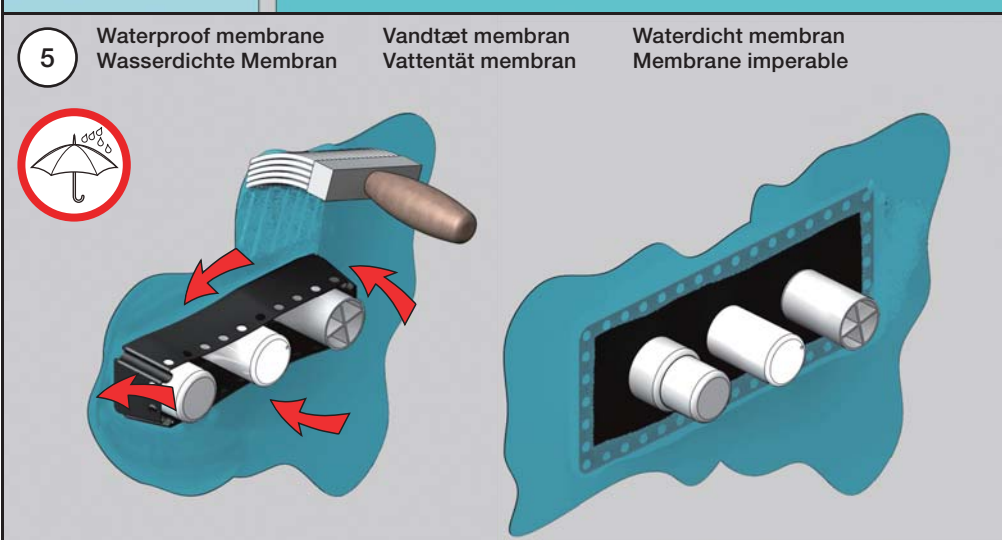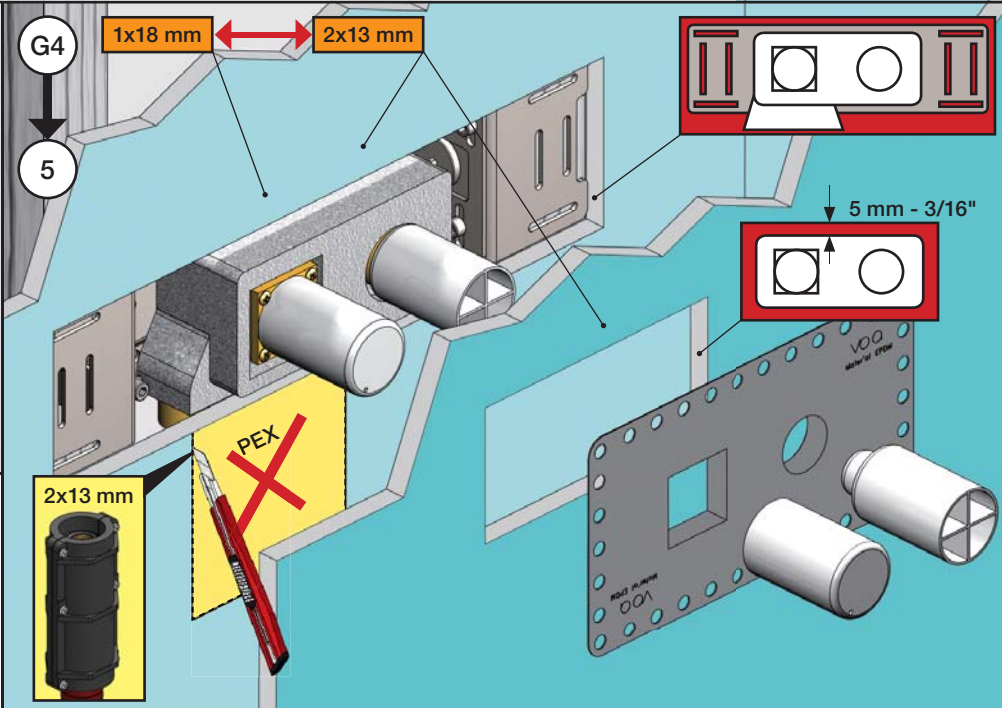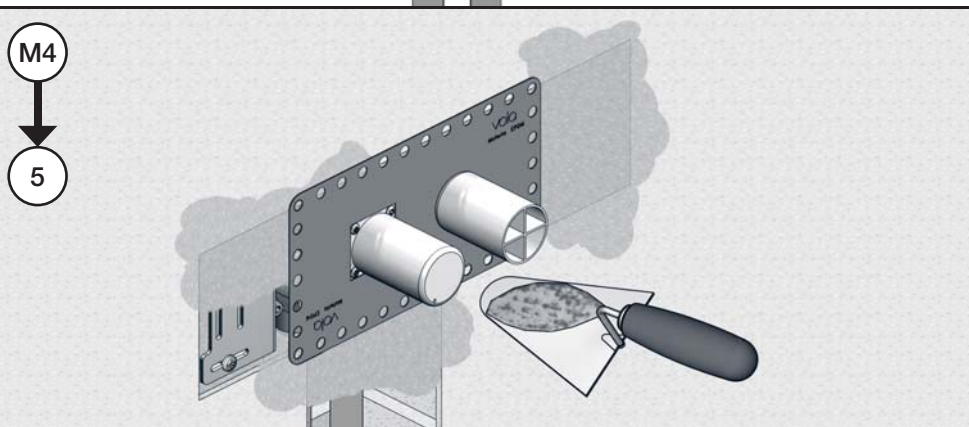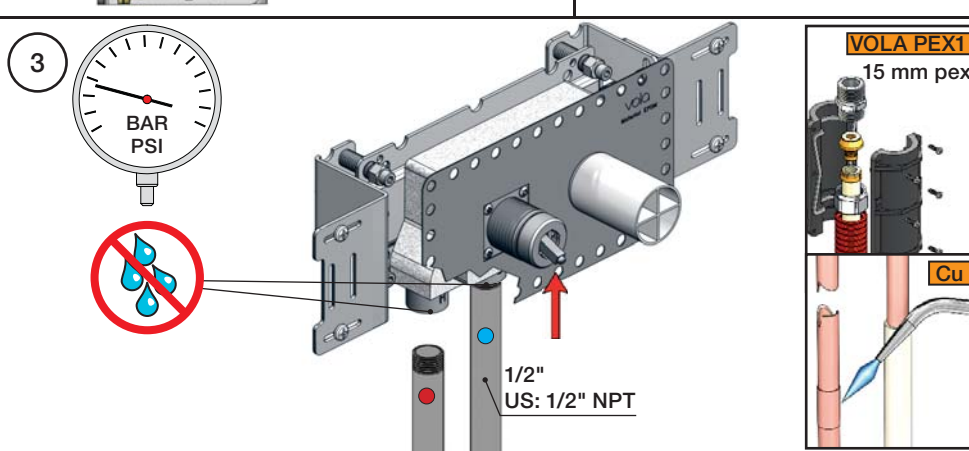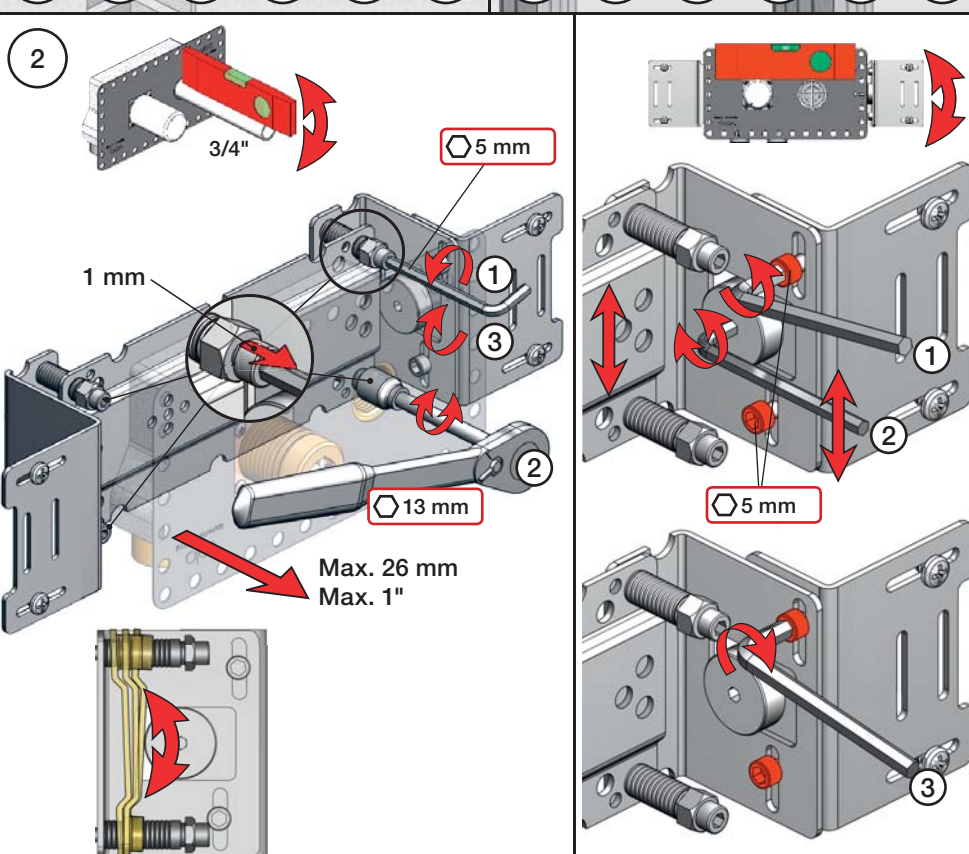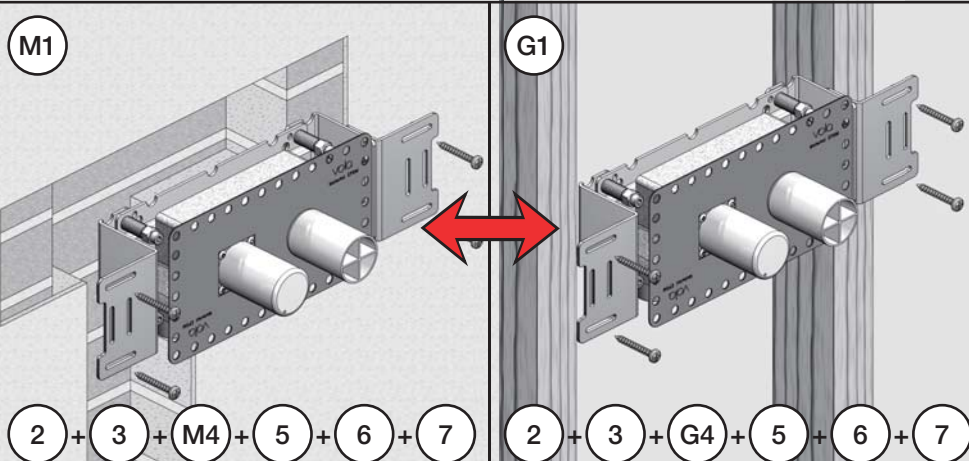

VOLA 070, 070R, 070-HT2

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



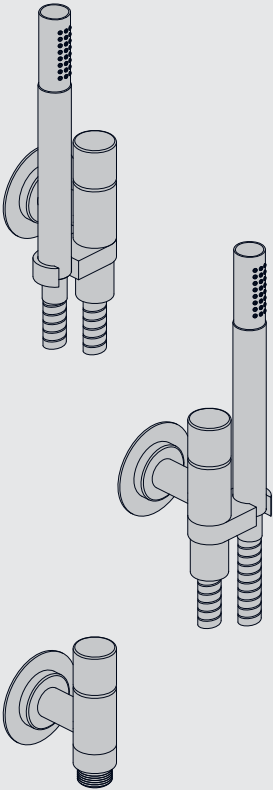


VA 1.55/18318


Data	Bar:	1	2	3	4	5
	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
	Max. 65°C. 150°F					




VR161:
VR161K: 7 l/min - 1.85 Gal/min (Cal Green)

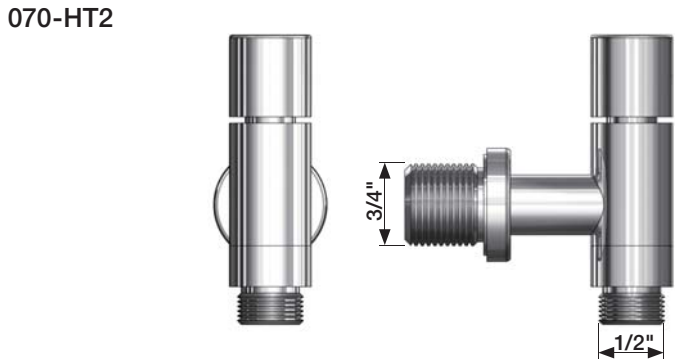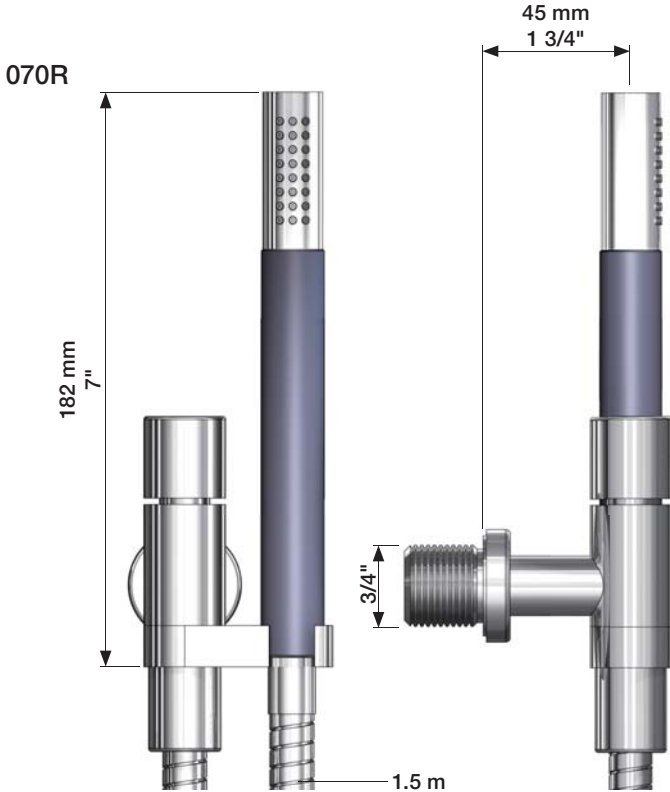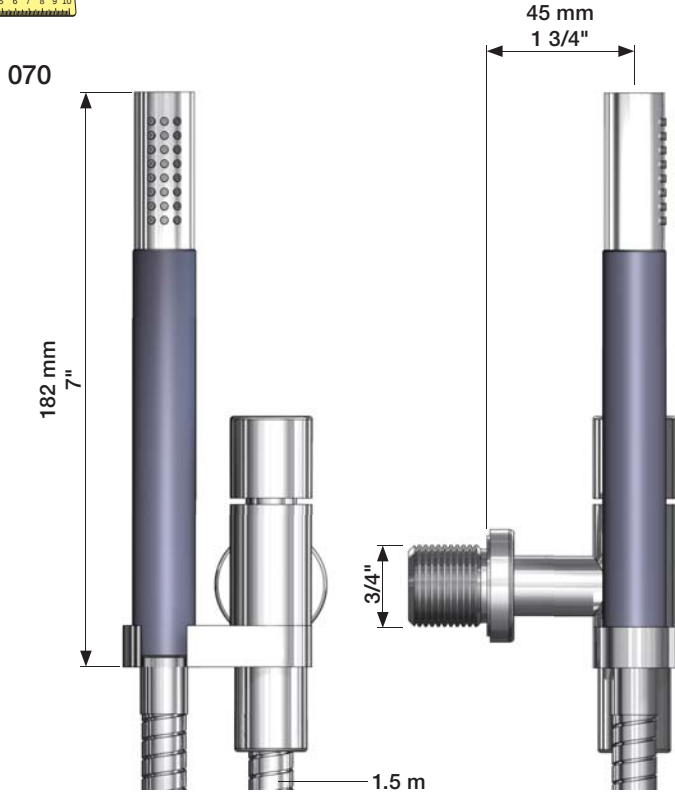


1

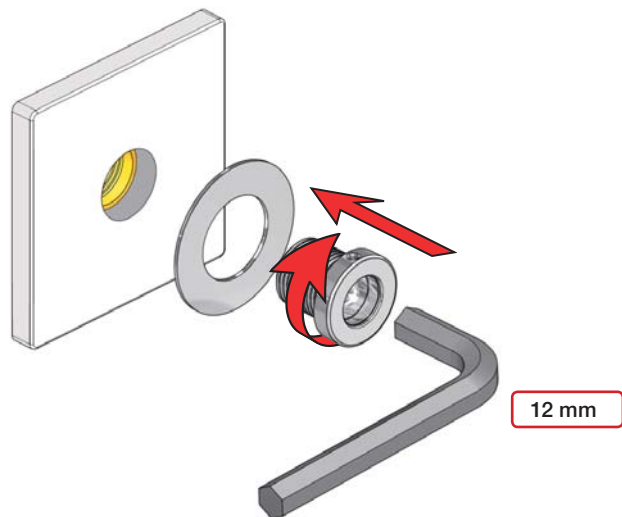

2

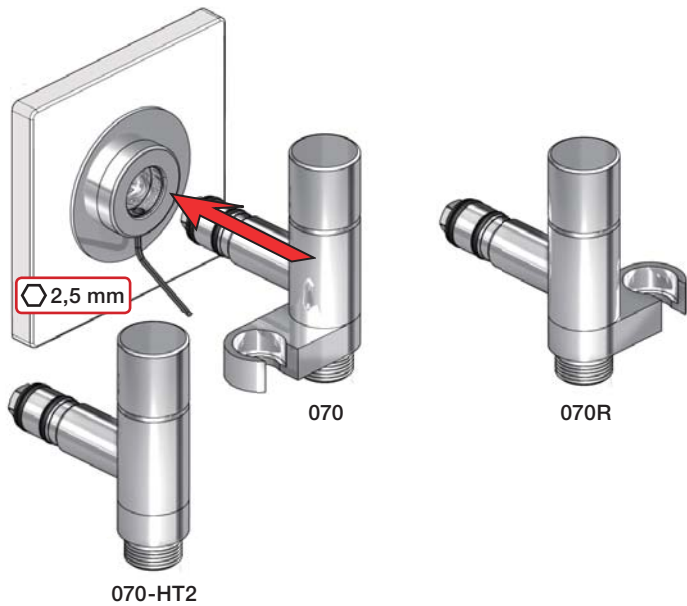


3

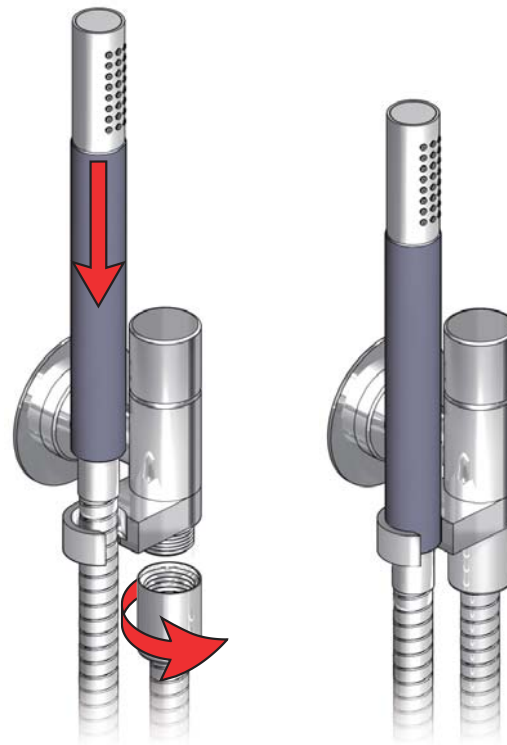

Extension
Verlängerung

Forlængerdele
Förlängning

Verlengstücken
Modification

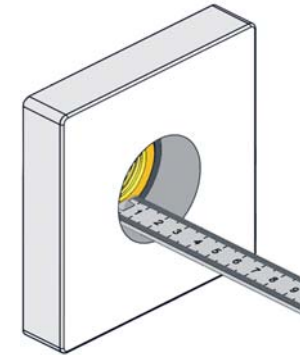

		VR2019: 
Tiles: Fliesen: Fliser: Fliser: Tegels: Carreaux:	3 - 15 mm	Standard
	15 - 25 mm	VR2019+10
	25 - 35 mm	VR2019+20
	35 - 45 mm	VR2019+30
	45 - 55 mm	VR2019+40
	55 - 65 mm	VR2019+50

VR2019+

