


PRODUCT DATASHEET

LUMIstixx

LUMIstixx | Little helpers

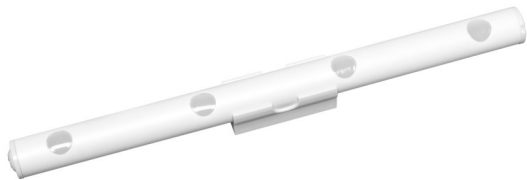

AREAS OF APPLICATION

- Sideboards
- Flower arrangements
- Practical adhesive surface or drill holes
- Horizontal or vertical alignment on walls or objects

PRODUCT BENEFITS

- Very compact LED luminaire

PRODUCT FEATURES

- Modern luminaire



TECHNICAL DATA

Electrical data

Nominal wattage	0.6 W
Operating mode	Battery
Nominal voltage	4.5 V


Photometrical data

Color temperature	6200 K
Color rendering index Ra	≥80
Luminous flux	25 lm
Luminous efficacy	41 lm/W

Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight



Length	222.0 mm
Width	16.2 mm
Diameter	16.2 mm
Height	21.0 mm
Product weight	70.00 g

Colors & materials

Body material	Acrylonitrile butadiene styrene (ABS)
Product color	White
Housing color	White

Temperatures & operating conditions

Ambient temperature range	-20...+60 °C
---------------------------	--------------

Lifespan

Number of switching cycles	100000
-----------------------------------	--------

Additional product data

Mounting type	Surface
Mounting location	Wall

Capabilities

Dimmable	No
LED module replaceable	Not replaceable
Adjustable	Yes

Certificates & standards

Protection class	III
Type of protection	IP20
Standards	CE

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075227897	Blister 1	23 mm x 140 mm x 400 mm	110.00 g	1.29 dm ³
4058075227903	Shipping carton box 6	413 mm x 161 mm x 158 mm	824.00 g	10.51 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.