


Laserliner

EasyCross-Laser



Automatic cross-line laser for height transmission and alignment


Rev17W49

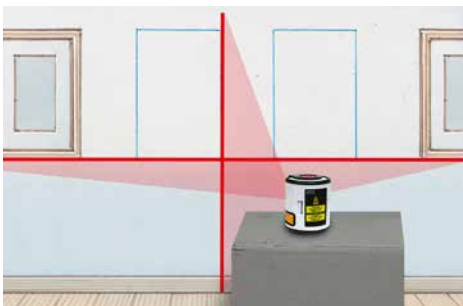

- **Bright laser cross:** Ideal for aligning tiles, wallpaper, pictures, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport Lock:** a pendulum lock protects unit during transport.

TECHNICAL DATA

SELF-LEVELLING RANGE $\pm 3^\circ$
ACCURACY $\pm 0,5$ mm / m
LEVELLING automatic
OPERATION RANGE (depending on room illumination) 10 m
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 3 x 1,5V alkaline batteries (type AAA, LR6)
OPERATING TIME 55 Std. (alkaline batteries)
OPERATING CONDITIONS 0...50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS -10°C...70°C, max. humidity 80% rH
DIMENSIONS (W x H x D) 61 x 72 x 62 mm
WEIGHT (incl. batteries) 202 g



Automatic Level

ON/OFF button and laser flash when levelling is disabled

1/4"-threads



EasyCross-Laser
+ batteries

Packing dimension (W x H x D)
110 x 235 x 80 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
EasyCross-Laser	081.070A	4 021563 703401	5

