







## SMART<sup>+</sup> WIFI FLOOD

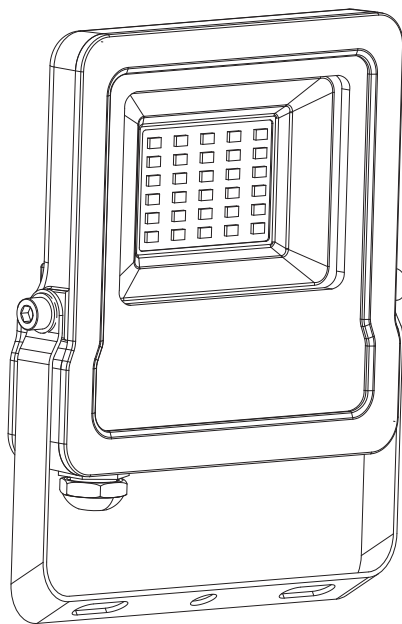

	EAN	W	lm	K		 (°C)	V~	mA	Hz		PF
SMART OUTD WIFI FLOOD 10W RGBW DG	4058075474604	10	630	3000	0.012769	-20...+40	220-240	45	50/60	100	>0.9
SMART OUTD WIFI FLOOD 20W RGBW DG	4058075474628	20	1260	3000	0.012769	-20...+40	220-240	90	50/60	100	>0.9
SMART OUTD WIFI FLOOD 30W RGBW DG	4058075474642	30	2190	3000	0.024948	-20...+40	220-240	140	50/60	100	>0.9
SMART OUTD WIFI FLOOD 50W DIM DG	4058075474666	50	4250	3000	0.035532	-20...+40	220-240	220	50/60	100	>0.9

**380 g**  
 4058075474604  
**380 g**  
 4058075474628  
**650 g**  
 4058075474642  
**1000 g**  
 4058075474666

2x 1x   
 2x **not included**

	W	H	L
10W	125	28	152
20W	125	28	152
30W	168	30	209
50W	200	36	237

**1**

**ON**  
**OFF**

**2**





500mm (10W-50W)

**3**

Max.:2.5N.m

**4**

max. 5m (10-50W)

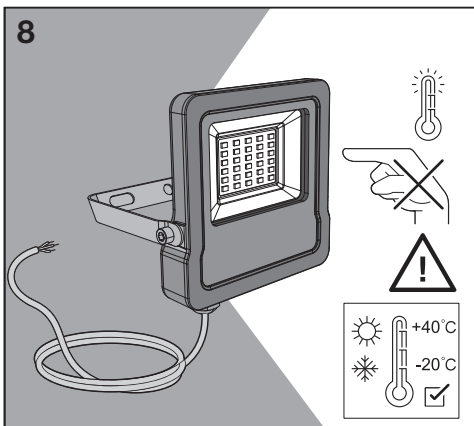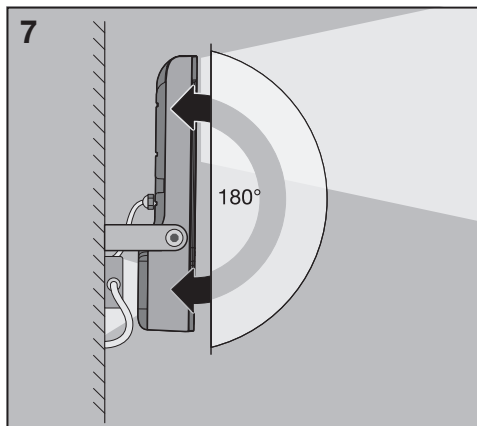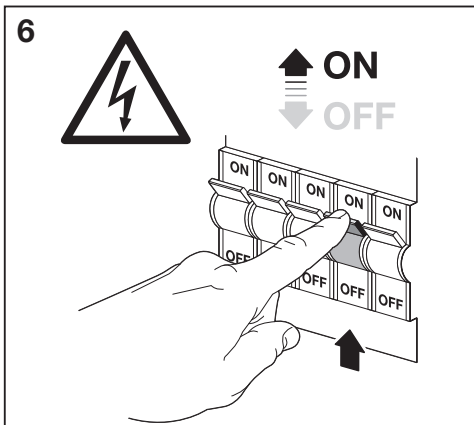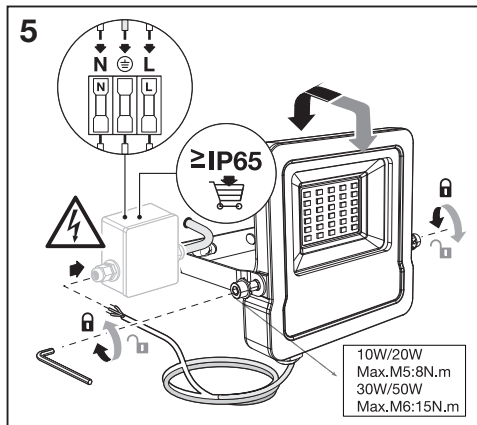



061



RoHS IP65

C10449057

G11099585V2

15.07.2020



LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg, Germany  
[www.ledvance.com](http://www.ledvance.com)