


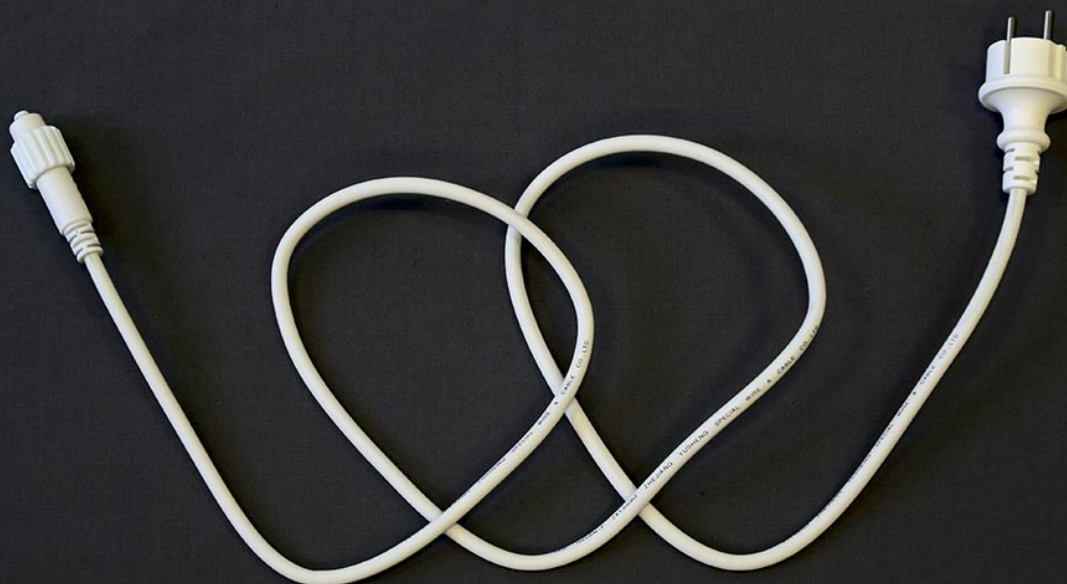

QuickFix® Main Connector

Predecessor: 014-234

001-002

Description

The days when you needed a separate socket for each element of your lighting installation are now finally consigned to history with our patented QuickFix™ system: Using this connector system, multiple branded 230-volt products may be connected together with no problem – and this is also true for 36-volt products. Each QuickFix™ product is individually quality tested to meet the IP67 rating - seeping moisture presents no danger to its continued operation. The QuickFix™ cable is available in the colors white and black; cables for low-voltage products can be ordered in the colors transparent and green.

Assembly:

230V LED products should always be installed under power as this is the only way to check the polarity. All new products have modified plugs ensuring the correct polarity.

Dimensions

 white

Length: 1.50 m
Max. Wattage: 1800 W

Operating voltage: 220-240 V AC 50-60Hz
Operating mode: Power supply
Outlets: 1
Connectable: yes

Packaging - Product

Type of Packaging: Blister with hook
EAN-Code: 9120079030331
Size (L-W-H): 17 x 25 x 0 cm
Weight: 0.235 kg
Produkts/Packaging: 1

Packaging - Inner Box

Type of Packaging: White carton
EAN-Code: 9120079039747
Size (L-W-H): 28 x 20 x 8 cm
Weight: 1.325 kg
Produkts/VPE: 5

Packaging - Shipping

Type of Packaging: Brown carton
EAN-Code: 9120079035008
Size (L-W-H): 42 x 30 x 26 cm
Weight: 8.53 kg
Produkts/VPE: 30



QuickFix® connection system