


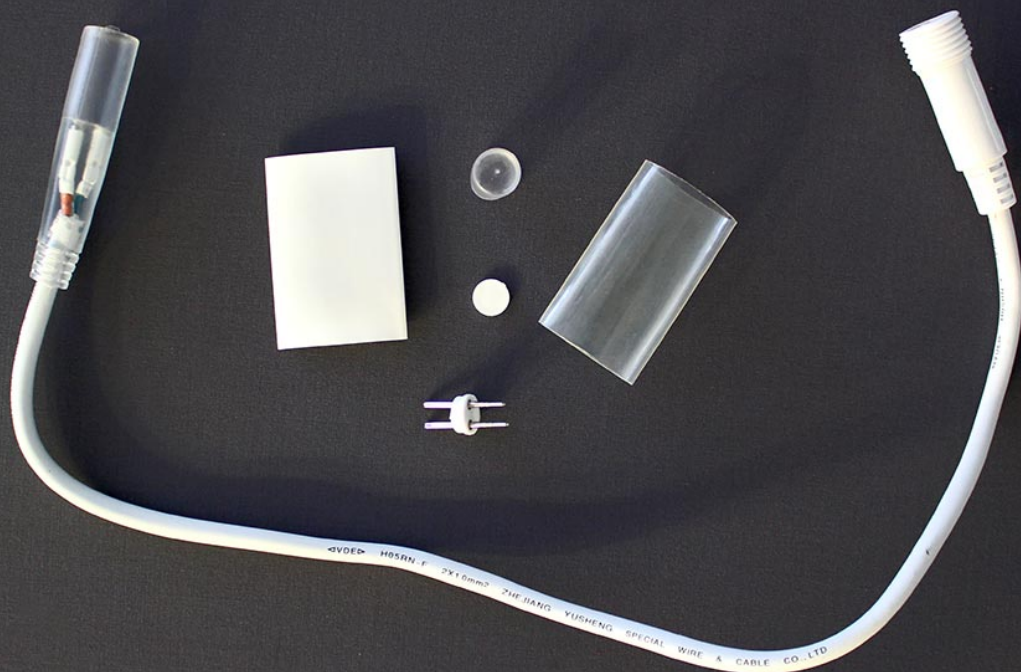

QuickFix® RopeLight Adapter

Predecessor: 244-034

001-142

Description

Thanks to their double insulated rubber cable, our outdoor products are particularly robust and durable, thus offering a long service life. Each individual LED diode has a protective polycarbonate cap glued securely over it ensuring that no water or moisture can seep in - there is nothing to work loose and thereby interrupt the electrical current. The patented and quality-tested Quick-Fix® System meets IP rating IP44 and allows compatible 230V products to be extended and connected together without problems. Particularly suited for trees, facades and buildings.

Dimensions

 white

Length: 50 cm

Max. Wattage: 740 W

Operating voltage: 220-240 V AC 50-60Hz

Operating mode:

Outlets: 1

Connectable: yes



QuickFix® connection system

Packaging - Product

Type of Packaging: Blister with hook

EAN-Code: 9120079030300

Size (L-W-H): 13 x 20 x 0 cm

Weight: 0.122 kg

Produkts/Packaging: 1

Packaging - Inner Box

Type of Packaging: White carton

EAN-Code: 9120079039709

Size (L-W-H): 28 x 18 x 8 cm

Weight: 1.22 kg

Produkts/VPE: 10

Packaging - Shipping

Type of Packaging: Brown carton

EAN-Code: 9120079034971

Size (L-W-H): 42 x 30 x 20 cm

Weight: 6.9 kg

Produkts/VPE: 50