



Technical Data

Pulsestarter EFS 600


Brief product description:

A complete range of high quality robust ceiling accessories, offering durability, reliability and ease of installation.

Features:

- Pre-heat 2.2s nominal at 20 °C
- Pulse height 1500v maximum
- Safety shutdown <3.5s at 20 °C
- Design life >10 years
- Storage temperature -20 °C to +85 °C

Product Images

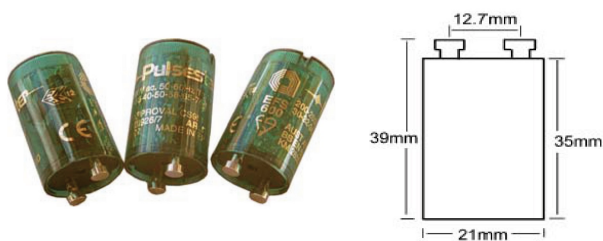

Technical Specifications

Operating Frequency	200 - 260V 50/60 Hz
Canister Material	Polycarbonate UV stabilised, conforming to BSEN, UL, and CSA.
Pin Material	Brass with nickel plating
Operating Temperature Range	30 °C to +75 °C
Markings	 
Approvals	BS EN 60926 & BS EN 60927
Weight	9 Grams
Pre-heat Time	2.4 second nominal at 20 °C
Safety Shutdown Time	< 3.5s at 20 °C
Can Identification	Green with gold lettering
Applications	4 - 125 Watt T8 & T12 4, 6, 8 & 13 Watt T5 16 - 38 Watt TC-DD 18 - 26 Watt TC-DE/TE 18 - 36 Watt TC-L, 22 - 60 Watt Circular