

Cables for EVlink™ Home and Pro AC ranges

Characteristics



Type 2 (T2)



- Tested and certified product: Third-party laboratory CB certification (LCIE) complies with applicable standard IEC 62196
- Fast charging (Mode 3)
- High-strength cable

Characteristics

- Length: available in 5, 7 and 10 m
- Max. current: 32 A
- Operating temperature: -30°C to +50°C
- Degree of protection: IP44.

Two good reasons to have a second EVlink cable in your electric vehicle


1

To take advantage of the charging capacity of public charging stations: by having an appropriate EVlink cable for the charging stations used, you obtain fast charging with integrated protection⁽¹⁾.

2

To have a fallback solution.
E.g.: charging cable damaged or misplaced, help out another electric vehicle user.

Which EVlink cable for which electric vehicle?

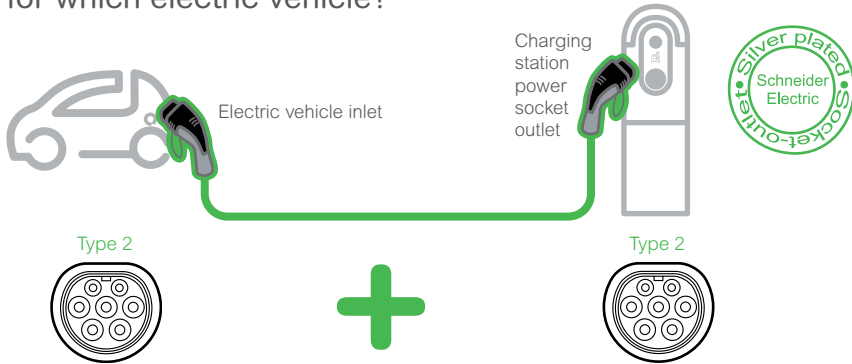

References	No. of phases		Charging power accepted (kW)				Cable length (m)
	1	3	3.7	7.4	11	22	
EVP1CNS32122	●		●	●			5
EVP1CNL32122	●		●	●			7
EVP1CNX32122	●		●	●			10
EVP1CNS32322		●	●	●	●	●	5
EVP1CNL32322		●	●	●	●	●	7
EVP1CNX32322		●	●	●	●	●	10

(1) Learn more on Wiki guide for Electric Vehicle charging