



SLBL Cirkulær lyddæmper med baffel

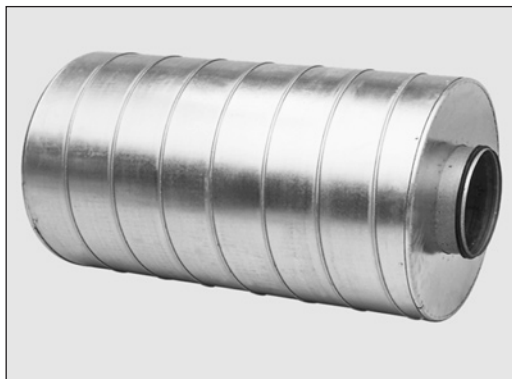

Cirkulær lyddæmper med isoleringstykkelse på 100mm og monteret med 100 mm baffel. Anvendelse når man skal bruge specielt høj dæmpning i store dimensioner og ved lave frekvenser, mellem 125 og 250 Hz.

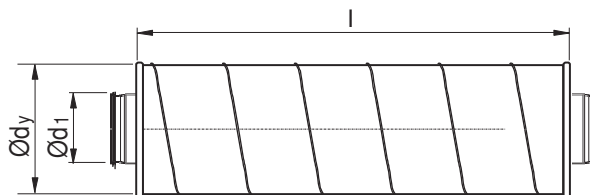

Ød ₁ nom	l mm	Indsætningsdæmpning (dB) i oktavbånd Hz								Ød ₂ mm	m kg
		63	125	250	500	1k	2k	4k	8k		
315	600	3	6	13	20	25	22	17	15	500	16,0
315	900	5	9	17	26	42	37	25	20	500	23,0
315	1200	5	10	22	34	52	51	32	24	500	30,0
355	900	5	8	16	25	41	36	24	16	560	26,0
355	1200	5	9	21	33	51	50	31	23	560	34,0
400	900	5	6	14	24	31	22	15	15	600	31,0
400	1200	5	8	16	30	42	32	21	18	600	42,0
400	1500	6	10	20	37	52	40	26	22	600	53,0
450	900	4	5	13	23	30	21	14	14	630	35,0
450	1200	4	7	15	29	41	31	20	17	630	47,0
450	1500	5	9	19	36	51	39	25	21	630	60,0
500	900	4	5	12	20	23	15	11	12	710	40,0
500	1200	4	6	14	27	34	21	14	15	710	53,0
500	1500	5	7	17	33	42	26	17	19	710	66,0
560	800	3	4	12	21	25	16	11	12	800	50,0
560	1200	3	5	13	26	33	20	13	14	800	59,0
560	1500	4	6	16	32	41	25	16	18	800	74,0
630	1200	3	4	11	23	24	14	11	12	800	63,0
630	1500	3	6	15	29	30	17	12	14	800	79,0
710	1200	2	4	11	21	17	11	10	10	800	71,0
710	1500	3	5	14	27	21	13	11	11	800	89,0
800	1200	2	3	10	20	16	10	9	9	1000	63,0
800	1500	2	4	13	26	20	12	10	10	1000	100,0

Lyddæmper leveres med fastmonterede nipler i begge ender.

Ordreseksempel

SLBL	315	900	100
Produkt			
Dimension Ød1			
Længde l			
Isoleringstykkelse			