



SLL50

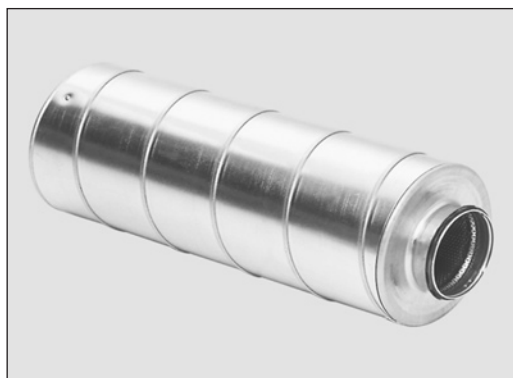

Lyddæmper med isoleringstykkelse på 50mm.

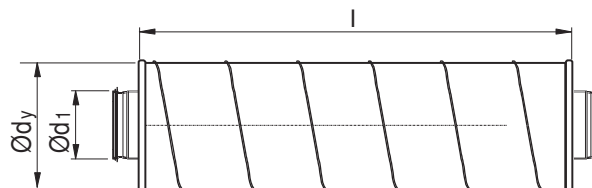

Ød ₁ nom	Længde nom	Indsætningsdæmpning (dB) i oktavbånd								Ød _y mm	l mm	m kg
		63	125	250	500	1k	2k	4k	8k			
80	300	4	8	8	11	27	47	43	15	180	300	1,5
80	600	4	9	13	22	38	50	45	24	180	600	2,6
80	900	4	11	22	42	49	50	48	33	180	900	3,7
80	1200	4	13	31	50	50	50	50	42	180	1200	4,8
100	300	3	8	7	11	25	37	36	12	200	300	1,7
100	600	4	9	11	19	33	45	40	19	200	600	3,0
100	900	4	10	15	28	44	50	44	27	200	900	4,2
100	1200	4	10	20	37	48	50	48	34	200	1200	5,5
125	300	3	4	7	11	15	14	14	11	224	300	1,5
125	600	4	6	10	19	28	33	25	18	224	600	2,6
125	900	4	9	14	27	42	50	35	24	224	900	3,7
125	1200	4	11	17	36	46	50	46	31	224	1200	4,8
160	300	1	2	5	9	17	14	16	8	260	300	2,3
160	600	2	4	8	16	26	26	23	10	260	600	4,0
160	900	3	5	11	23	35	39	30	12	260	900	5,7
160	1200	4	6	15	30	44	50	38	14	260	1200	7,4
200	300	1	2	5	12	11	10	10	9	315	300	2,9
200	600	1	3	7	16	22	20	13	10	315	600	4,9
200	900	1	5	10	19	32	31	16	11	315	900	6,9
200	1200	2	6	12	22	42	41	20	13	315	1200	8,9
250	600	1	2	6	13	19	15	8	6	355	600	6,5
250	900	1	3	9	17	26	21	13	8	355	900	9,2
250	1200	2	4	12	21	34	27	17	10	355	1200	12,0
315	600	0	1	4	10	12	7	4	4	500	600	8,0
315	900	1	2	6	15	21	15	8	7	500	900	11,3
315	1200	1	3	7	21	27	22	13	10	500	1200	14,6
400	600	0	1	4	10	11	5	1	2	600	600	10,5
400	900	1	2	5	13	15	8	3	2	600	900	14,6
400	1200	1	2	7	16	20	11	4	3	600	1200	18,7
500	900	1	2	5	12	14	3	4	2	710	900	17,8
500	1200	1	2	6	16	18	4	5	3	710	1200	22,8
630	900	2	3	7	12	5	4	4	5	800	900	44,0
630	1200	2	4	8	17	7	4	5	7	800	1200	56,0
800	1200	2	3	8	11	5	4	5	6	1000	1200	69,0
800	1500	2	3	10	16	6	5	6	7	1000	1500	86,0

Ordreksempel

SLL50	125	600	50
Produkt			
Dimension Ød1			
Længde, nominal			
Isoleringsstykkelse			

Lyddæmper leveres med fastmonterede nipler i begge ender.