



STRIP-LIGHT

451158.002.2 | Linear luminaires

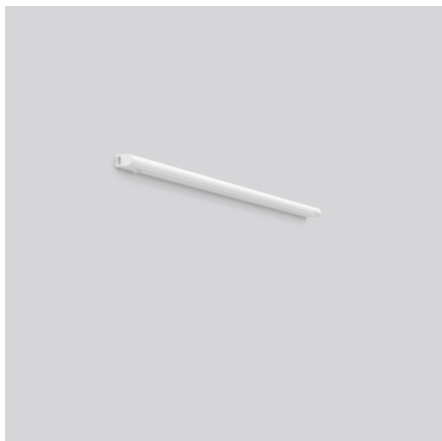

Ceiling and wall luminaires
4051859709626
L 838, B 28, H 38

ceiling mounting, wall (surface)
white

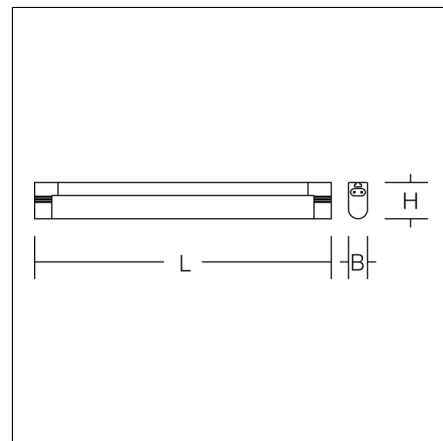

Very compact linear luminaire with rocker switch. Universally suitable for store lighting, vault lighting, kitchen and bathroom lighting. Base: plastic. Diffuser: plastic (polycarbonate), opal. Homogeneous and smooth light distribution. Suitable for ceiling mounting, wall (surface). Easy to mount with clips. Connecting cables for through-wiring without tools. Max. 12 luminaires can be mounted as a light channel. Included in delivery: 1.80 m power supply cable, 150 mm connecting cable, straight rigid coupling and 2 brackets each for wall and ceiling mounting. Suitable for mounting on or into furniture.

Product specifications

| | |
|--|--|
| Length L | 838 mm |
| Width B | 28 mm |
| Height H | 38 mm |
| Weight | 362 g |
| Light source | LED |
| Colour temperature | 3000 K 4000 K |
| Rated luminous flux | 3000 K: 1250 lm |
| | 4000 K: 1350 lm |
| System power | 3000 K: 13 W |
| | 4000 K: 13 W |
| System efficiency | 3000 K: 96 lm/W 4000 K: 104 lm/W |
| Glare evaluation UGR (4H 8H) | 26,2 26,4 |
| Beam angle | down 169°/109° 168°/109° up 180°/180° |
| Rated life | 25000 h (L70/B50) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance | 5 |
| Photobiological safety according to EN 62471 | Risk group 0 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 50 Hz |
| Luminaires on B10A fuse | 100 |
| Luminaires on B16A fuse | 160 |
| Luminaires on C10A fuse | 100 |
| Luminaires on C16A fuse | 160 |
| Inrush current / Inrush current duration | 0.86 A / 42 µs |
| CIE Flux Code / CEN Flux Code | 37 66 86 83 100 |
| Type of protection | IP 20 |
| Protection class | II |
| Filament test | 750°C - 30 seconds |
| Impact resistance | IK02 |
| Ambient temperature | 25 °C |
| Safety marks | |
| Test marks | |
| Conformity mark | CE, EAC |

STRIP-LIGHT

451158.002.2 | Linear luminaires

Accessories



981457.002
Power supply cable (Europlug with socket)



981464.002
Connecting cable, Length 300mm



981466.002
Connecting cable, Length 600mm



981467.002
Connecting cable, Length 900mm