



serie **JUNIORBLOCK**

Art. **100200**

**BREVETTATO
PATENTED**



-  Valvola di ritegno a passaggio ridotto, filettatura F/F UNI ISO 228/1-G.
-  Reduced bore check valve, UNI ISO 228/1-G F/F threaded.
-  Clapet anti retour à passage réduit, taraudée F/F UNI ISO 228/1-G.
-  Rückschlagventil mit reduziertem Durchgang, beiderseits Innengewinde nach UNI ISO 228/1-G.
-  Válvula de retención a paso reducido, roscas hembra/hembra UNI ISO 228/1-G.

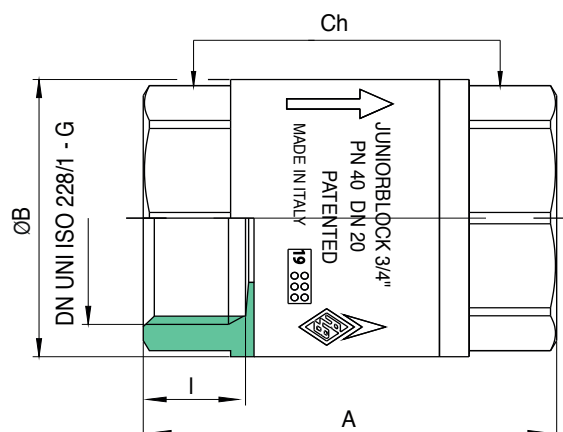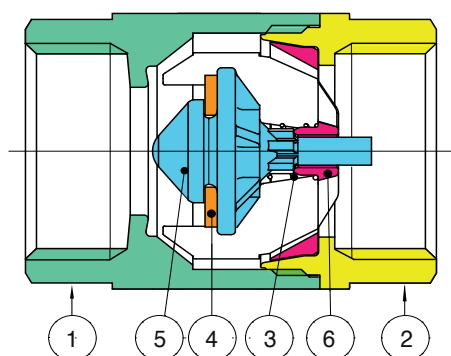

POS.	DENOMINAZIONE	PART NAME	DESCRIPTION	TEILBENENNUNG	DENOMINACION	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	CORPO	BODY	CORPS	GEHÄUSE	CUERPO	BRASS CW617N UNI EN12420	1
2	MANICOTTO	END CONNECTION	MANCHON	MUFFE	MANGUITO	BRASS CW617N UNI EN12420	1
3	MOLLA	SPRING	RESSORT	FEDER	MUELLE	STAINLESS STEEL AISI 302	1
4	GUARNIZIONE PIANA	FLAT SEAT	JOINT OLAT	FLACHE DICHTUNG	ASIENTO PLANO	NBR	1
5	OTTURATORE	OBSTRUCTOR	OBTURATEUR	SCHIEBER	OBTURADOR	FORTRON (PPS)	1
6	SUPPORTO	SUPPORT	SUPPORT	LAGER	SOPORTE	POM	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	Ch	ØB	A	Kv	PN	Kg
1/2"	15	20	160	10020004	12	25	27	44,5	3,7	40	0,10
3/4"	20	10	80	10020005	12	31	34,5	48,5	5,8	40	0,16
1"	25	10	80	10020006	14,5	38	42	56	8,6	25	0,26
1"1/4	32	6	24	10020007	16	48	51,5	62	13,8	25	0,43
1"1/2	40	4	32	10020008	18	54	61	71,5	20,2	16	0,60
2"	50	2	8	10020010	19	67	72	78	30,9	16	0,94
2"1/2	65	6	12	10020012	24	83	90	92	48,8	12	1,55
3"	80	2	4	10020014	29	98	112,5	113,5	79,4	12	2,78
4"	100	2	4	10020018	32	128	138,5	127	124,9	10	4,70

Limiti di temperatura: -20°C +100°C - Temperature range: -20°C +100°C.

Disponibile accessorio, art. 110100, a pag. 299 - The accessory, item 110100, it's available. See at page 299.