



BINA

698-310111995600

BINA SDI ROUND SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor black, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, with converter, max. 1050mA, dimmability: not dimmable, IP20

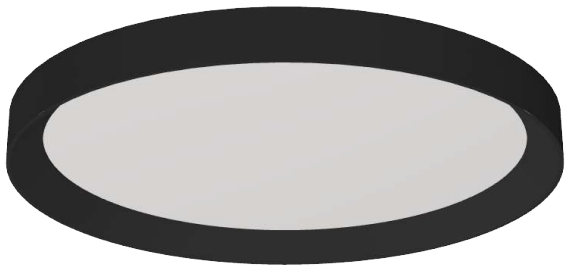


DRAWING

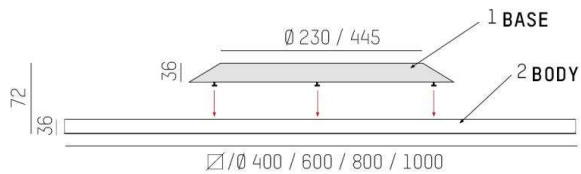

TECHNICAL DETAILS

System perform. [W]	45
Bulb type	LED
Luminous flux [lm]	5380
Current sec. [mA]	1050
Colour temp. [K]	3000K
CRI	>80
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	72
Diameter [mm]	400
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	4,53
Colour lamp	black
RAL	9005
Colour decor	black
EAN-Number	9010506810714
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	24

LIGHT DISTRIBUTION CURVE

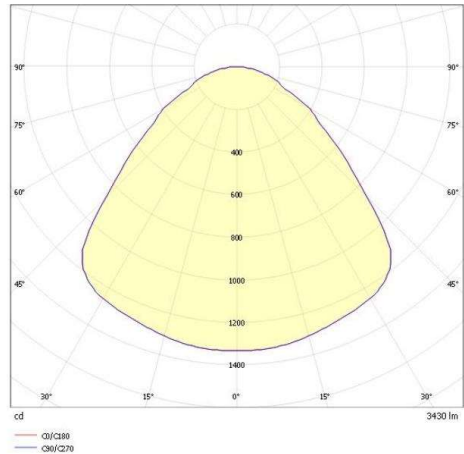

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.