


PILLE

737-10013phdv1

PILLE PDI SUSPENSION made of aluminium, black, similar to RAL 9005, shade made of hand-blown glass rose champagne, light output direct / indirect, with converter, max. 700mA, dimmability: DALI, cable black, adapter/ceiling base black, pendant length 3000mm, IP20




DRAWING

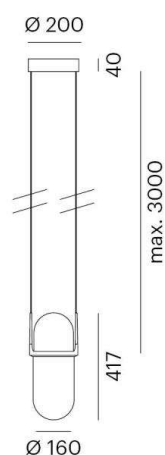

TECHNICAL DETAILS

| | |
|-----------------------------|-------------------|
| System perform. [W] | 27 |
| Bulb type | LED |
| Luminous flux [lm] | 1650 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 2700K |
| CRI | PREMIUM>90 |
| Optics | hand-blown glass |
| Converter | with converter |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 188,7 |
| Height [mm] | 417 |
| Pendant length [mm] | 3000 |
| Diameter [mm] | 160 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 3,34 |
| Colour lamp | black |
| RAL | 9005 |
| Colour of glass/shade | rose champagne |
| Colour adapter/ceiling base | black |
| Electric wire | black |
| EAN-Number | 9010870125629 |
| Lifetime [h] | 50 000 L80 B10 |
| Energy efficiency cl. | E |
| No. of luminaires B16A | 50 |

LIGHT DISTRIBUTION CURVE

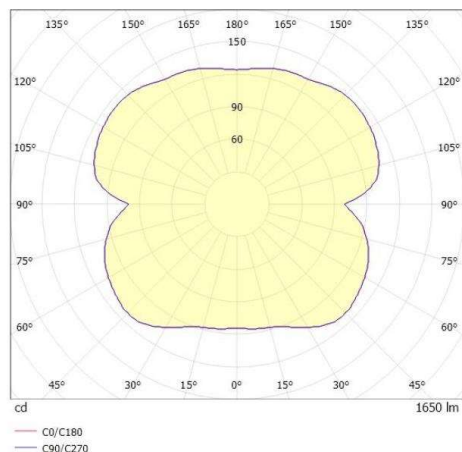

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.