



Batibox™ Multimedia boxes

Cat. No(s): 0 801 93/95



0 801 93

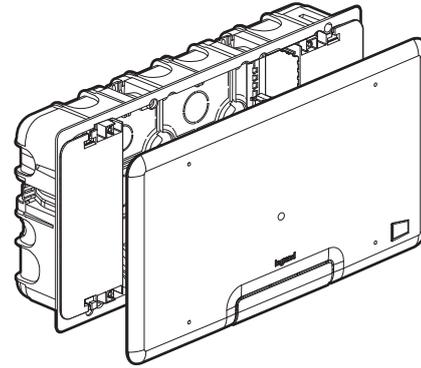

0 801 95

1. USE

Multi-material flush-mounting boxes for connecting wall-mounted LCD or plasma screens.

Supplied with 2 Mosaic programme 5-module supports for flush-mounting high/low current functions (eg.: 2 P+E, TV sockets, HDMI, RCA sockets, etc.)

Can be installed in advance to reserve the future space for a screen.

Extra-slim cover with cut-out panel for cable outlet.

Supplied with retaining bar for cords.


Equipped with a site protection cover.

Suitable for solid or cavity walls. Depth: 50 mm

2. RANGE

Designation	Cat. No.
Max. box capacity: 1 x 5 modules Dimensions: 142 x 142 mm	0 801 93
Max. box capacity: 2 x 5 modules Dimensions: 285 x 142 mm	0 801 95

3. DIMENSIONS (mm)

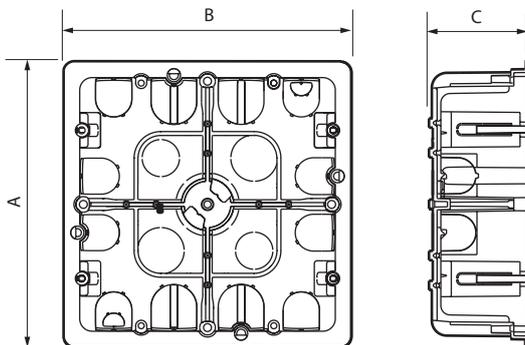

Cat. No.	A	B	C
0 801 93	154	154	50
0 801 95	154	296	50

4. INSTALLATION

Boxes for flush-mounting in the wall.

Clamp tightening capacity ranges from 4 mm to 30 mm.

Multiple options for cable entries (on side and back of box) which can be knocked out without the need for a tool.

Cat. No.	No. of inputs (mm)	
0 801 93	8 x Ø 20 - 4 x Ø 25	2 x Ø 20 - 2 x Ø 25
0 801 95	6 x Ø 20 - 8 x Ø 25	4 x Ø 20 - 4 x Ø 25

Note:

Mounting principle of Batibox multimedia boxes
 Cat. Nos. 0 801 93/95, refer to instruction sheet **LE02799**.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20

Protection against impacts: IK 04

■ 5.2 Material characteristics

Casing: orange transparent PVC

Screws: grey hardened nickel and zinc-plated steel screws (length: 28 mm under the head)

Self-extinguishing: 850°C/30 s

■ 5.3 Climate characteristics

Storage temperature: - 5°C to + 60°C

Usage temperature: - 5°C to + 40°C

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e-catalogue.