



BESKRIVELSE


53EU

Kraftig kuglehane med fuldt gennembløb. Med blåt gearhåndtag 1:4. Muffe x muffe.

TEA overfladebehandling

I henhold til EN 13828 standard.

DIMENSIONER

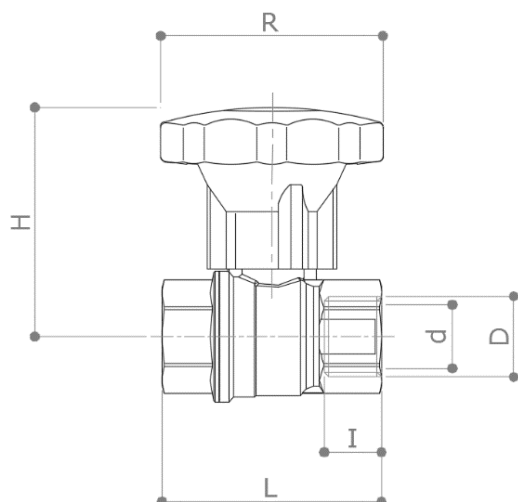


D	¼"	3/8"	½"	¾"	1"	1 ¼"	1 ½"	2"
d	10	10	15	20	25	32	40	50
H	63	63	66	72	78	83	114	121
I	11.5	12	17	18	21.5	23.5	23.5	28
L	46	47	62	69	84	96	106	127
R	70	70	70	70	70	70	110	110
Gr.	200	180	260	380	660	980	1400	2250

Dimensioner i **mm**. Alle gevind er i overensstemmelse med ISO 7/1 eller ISO 228 standarder.

MATERIALER


Ventilhus	CW617N (EN 12165) CuZn40Pb2
Kugle	CW617N (EN 12165) CuZn40Pb2 TEA-belægning.
Spindel	CW614N (EN 12164) CuZn39Pb3
Pakdåse	CW614N (EN 12164) CuZn39Pb3 Justerbar
Pakninger	2 x PTFE + 1 x PTFE på spindel
O-ringe	2 x FKM
Geargreb	Nylon

TRYKTABSDIAGRAM

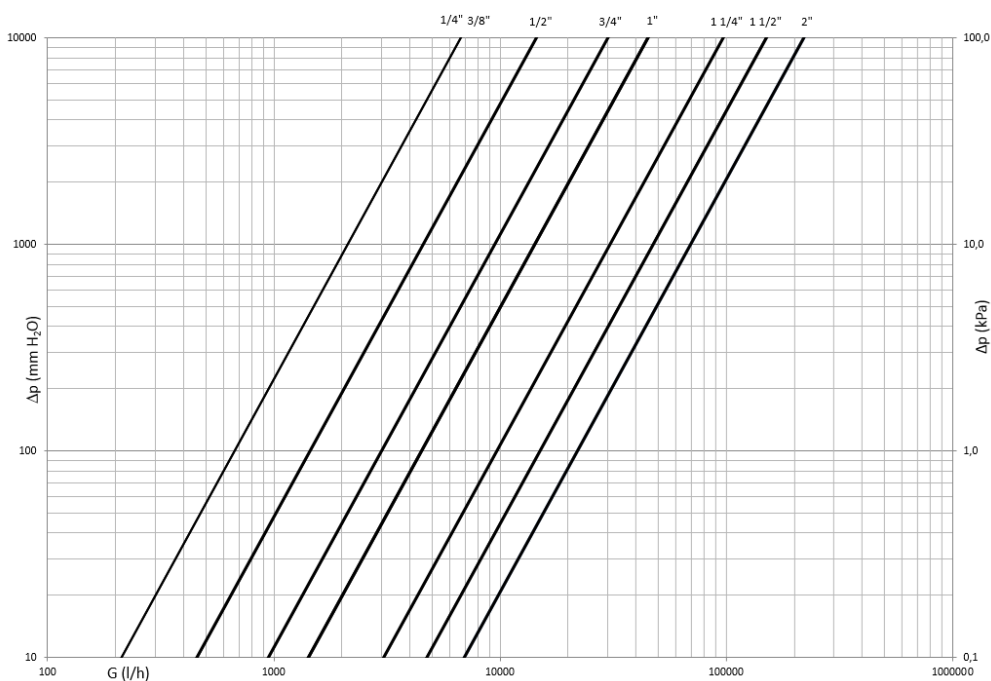

Dim.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	6.6	6.7	14.5	30	45	97	150	220
PN	42	42	42	42	35	35	35	35

TEMPERATUR / TRYKDIAGRAM

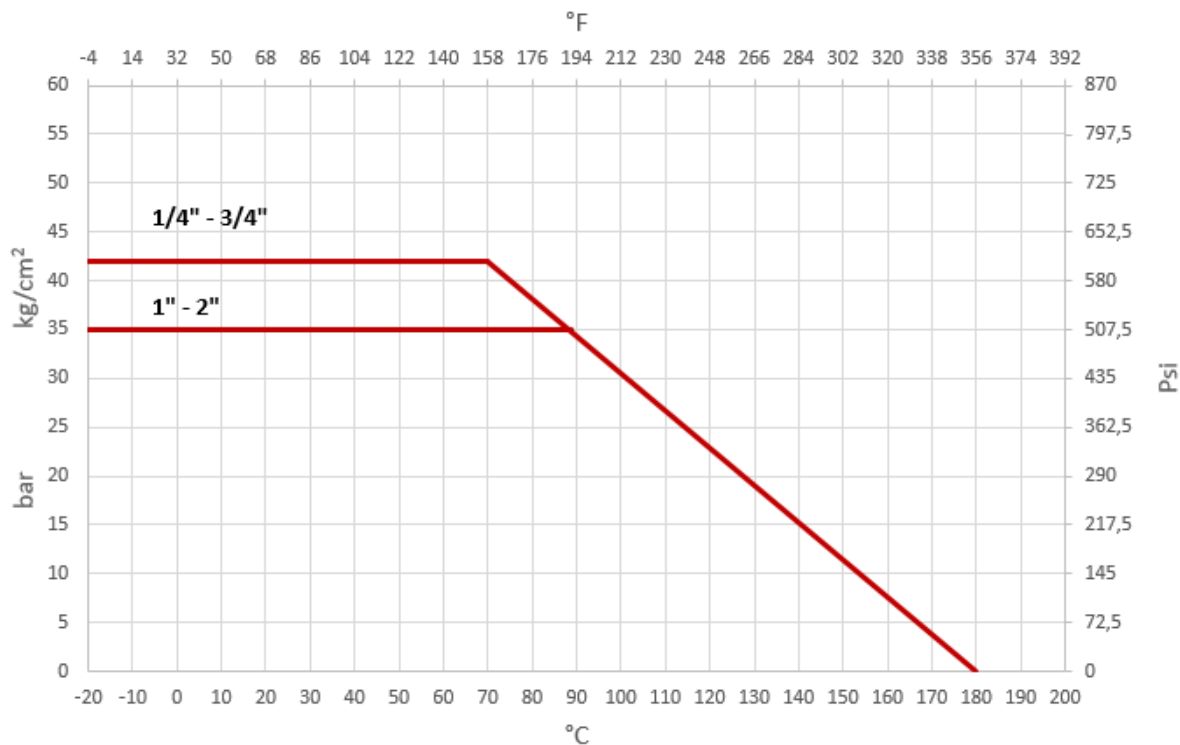

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

30 bar – 100°C – non shock

10 bar – 150°C – non shock

Minimumstemperatur -20°C med maks. 50% glykol. Ingen frost.