



BESKRIVELSE



184MO

Klapkontraventil med metalskive.
Muffe x muffe. Messing.
Kun til vandret montering.

DIMENSIONER

D	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
d	15	20	25	30	35	47	55	70	90
H	50	63	69	82	92	94	107	130	159
I	10	10	12	12	12	11	16	16	20
L	48	58	70	81	88	97	118	135	164
Gr.	200	330	490	490	890	1000	1590	2440	3850

Dimensioner i **mm**. Alle gevind er i overensstemmelse med ISO 7 eller ISO 228 standarder.

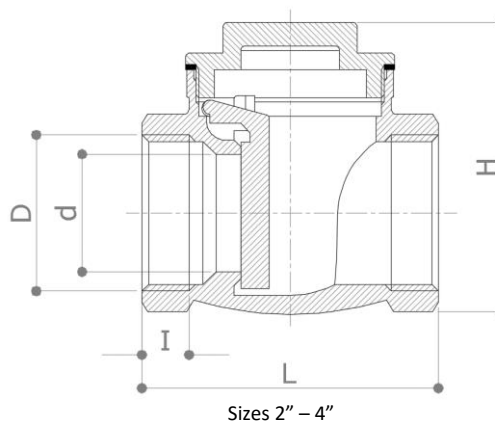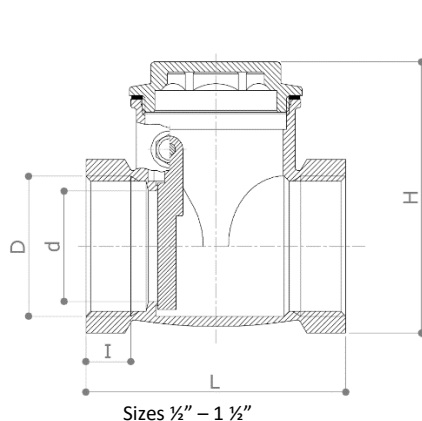

MATERIALER


Ventilhus	CW617N (UNI EN 12165) CuZn40Pb2
Kappe	CW617N (UNI EN 12165) CuZn40Pb2
Skive	CW617N (UNI EN 12165) CuZn39Pb3
Kappeforsegling	Fiber

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

10 bar – 100°C – non shock (1/2" – 2")


6 bar – 100°C – non shock (2 ½" – 4")

TRYKTABSDIAGRAM

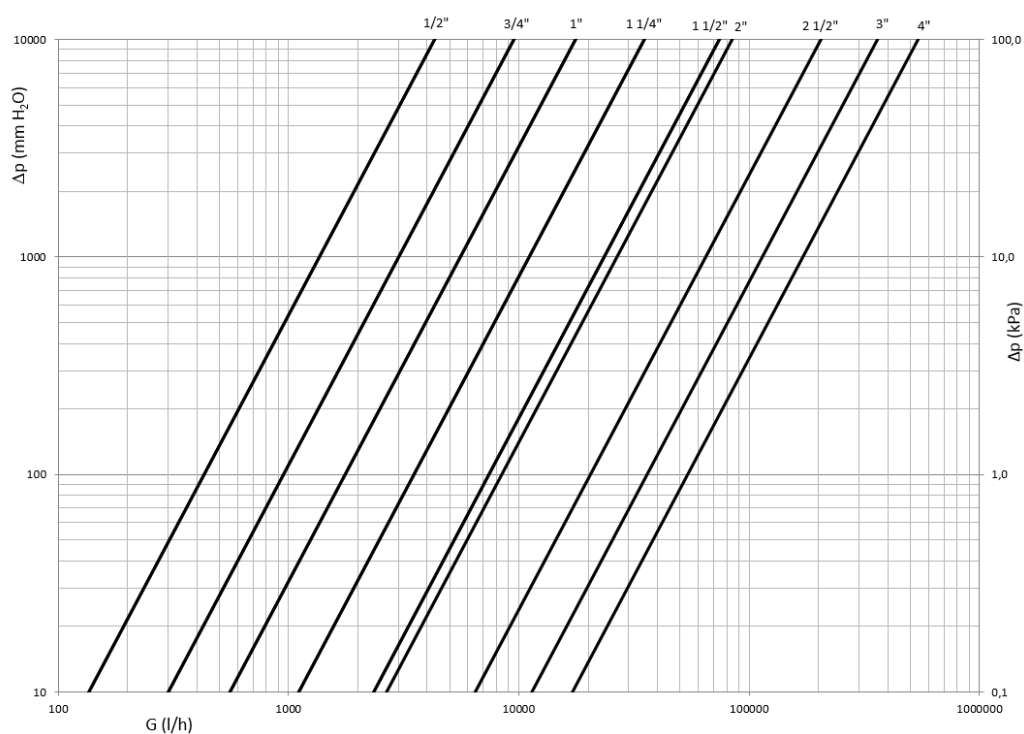

Dim.	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
Kv	4.3	9.5	17.6	35	74	83	204	360	540
PN	10	10	10	10	10	10	6	6	6

INSTALLATION - EKSEMPEL

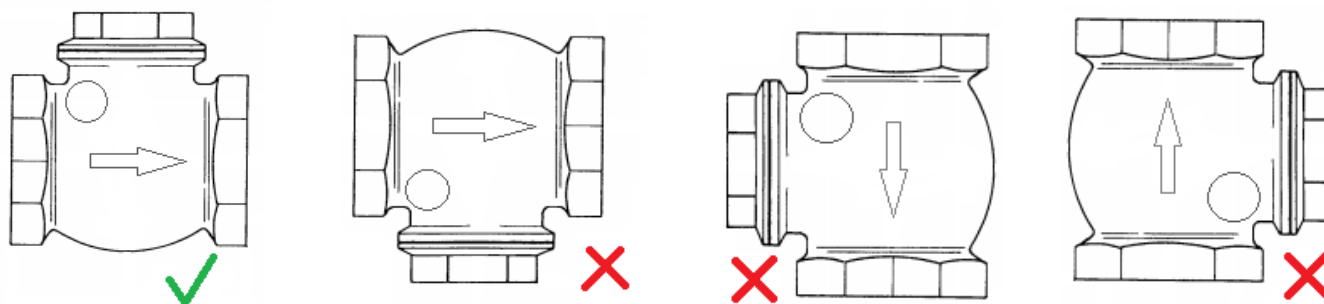

Kun vandret montering er muligt. Kappen skal vende opad.