



Tele Crimp Connectors

Drawing no.


TCAUx

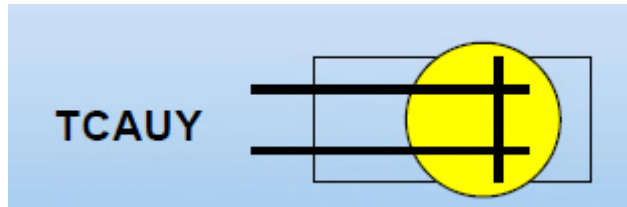

2 x  
0,4-0,65mm / AWG22-26  
Max insul. 1,62mm

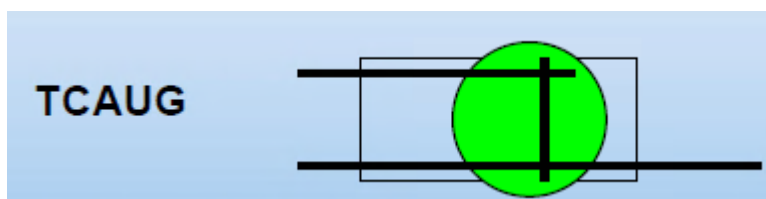

2 x  
0,4-0,9mm / AWG19-26  
Max insul. 1,67mm

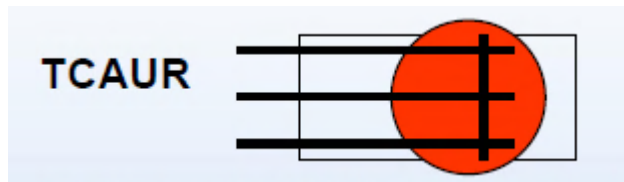

2 or 3 x  
0,4-0,9mm / AWG19-26  
Max insul. 1,67mm

## Article information

Clean, solid and rapid connection of your wires to keep communication line free of noise

ECT Discrete connectors (UY, UB & UR ) are available to handle a wide range of conductors sizes and application.

Small size allow you to handle a higher pair count splicing while keeping the bundle OD to a minimum.

Crimp tool available, which is designed for the use of crimping UY, UB & UR connectors.

## General Data

Dielectric strenght	3.0KV min. 60Hz AC
Rate voltage	500V R.M.S.
Humidity insul. Resistance	10 <sup>5</sup> Mohm min.
Water immersion insul. Resistance	100Mohm min.
Tensile test	90%min of controlled wire breaking strenght
Crimping force UY	28 kg max.
ROHS	Yes.

## Ordering information

Order no.	EAN Code	Description	Colour	Packsize
TCAUG	5705839019234	Crimp connector, UG tab 0,4-0,9mm, Gel	Green	100
TCAUR	5705839019203	Crimp connector, UR Y-type 2/3 x 0,4-0,9mm, Gel	Red	100
TCAUY	5705839013331	Crimp connector, UY U-type 2 x 0,4-0,65mm, Gel	Yellow	100