


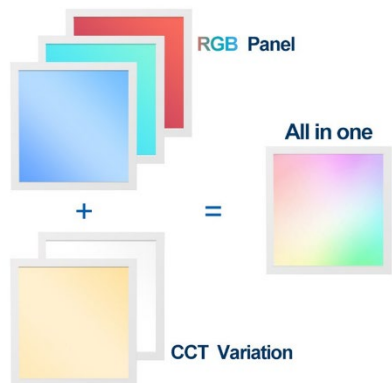

Beskrivelse

green:ID **TrueColor** lyspaneler er fremstillet med de bedste komponenter, så man har et pålideligt panel i mange med opbakning via produktets garanti. Dette fuldfarve-panel kan give alle RGB farverne, ligesom der er fuld mulighed for rigtig hvid farve i spektret fra helt varm hvid til kold hvid.

Funktioner/fordele



Panelerne er kun 11,5 mm. høje, og de er 5 mm. mindre i bredden for perfekt pasform i loftmoduler og monteringsrammer, men de kan også monteres nedhængt via wiresæt.


Specifikationer

Modelnummer	65261
Effekt	36W (ved brug af controller)
Lysfarve	RGB+2.700-6.500 kelvin
Lysstyrke	RGB+2.100~2.500 lumen
Størrelse	595x595x11,5 mm.
Lysvinkel	120°
Lysægthed (CRI)	>90
Tæthedsgard	IP30
Driver	Medfølger ikke
Spænding	24V DC
Dæmpbar	Ja (via controller/driver)
LED chip	Epistar
Blændefaktor	UGR<19
MacAdams	SDCM<3
Levetid (timer)	L80B10 > 50.000
Driftstemperatur	-20° til +50° C
Materiale	Ramme af aluminium, hvidlakeret
Guide plate (LGP)	PMMA
Garanti	5 år

Tilbehør

- Drivere og controllere for power og lysstyring
- Monteringsrammer (både indbygning og påbygning), robuste, der samles hurtigt via clips
- Clips-sæt for indbygnings-montering
- Wire-sæt for nedhængt montering

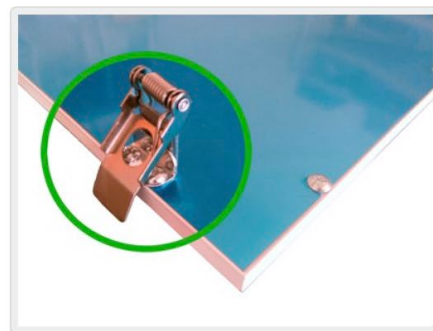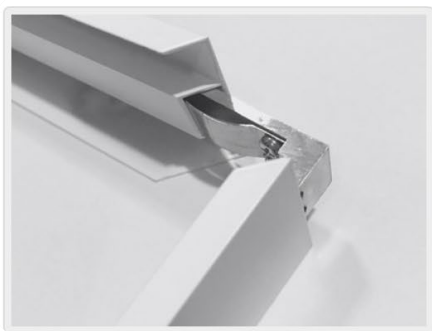

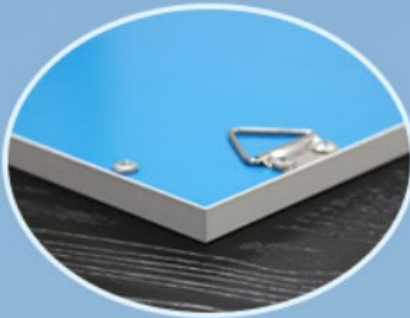


Thickness:

Thickness 11.5mm,
IP30 for choice



Wire:

Black: DC24V
White: cold color
Yellow: warm color
Red: red color
Green: green color
Blue: blue color

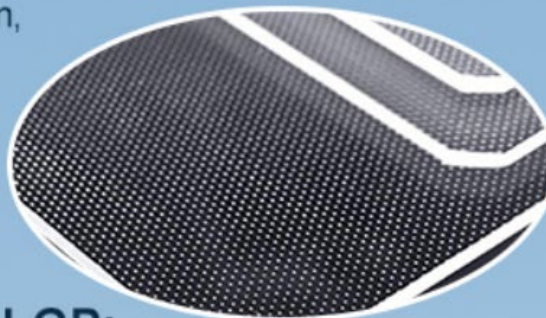

LGP:

PMMA material, 3mm thickness,
designed for 20 years using.



Frame:

Thickened 6063 aluminum,
seamless welding. Surface
spraying, comply with ISO 9001:2016



Leds:

Taiwan EPISTRA SMD3030+SMD3528
0.2/0.5W CRI>80,90,95 for choice
Single leds brightness 50-55lm

Thickened 6063 aluminum,
seamless welding. Surface
spraying, comply with ISO 9001:2016

Frame:

Taiwan EPISTRA SMD3030+SMD3528
0.2/0.5W CRI>80,90,95 for choice
Single leds brightness 50-55lm

Leds:

Composition material

Frame

Thickened 6063 aluminum, seamless welding.
Surface spraying, comply with ISO9001:2016.

Diffuser plate

CHIMEI PS material, 1.2mm,
92% high light transmittance.

LGP

PMMA material, 3mm thickness,
designed for 20 years using.

Reflective Sheeting

Effectively raising lumens.

EVA

Between 0.25 and 0.48mm

Backboard

0.35mm iron plate.

Surface spraying, comply
with ISO 9001:2016

with ISO 9001:2016
surface spraying, comply
0.35mm iron plate
Backboard