

Fitting instruction
Montageanleitung
Monteringsvejledning
Montage hanleiding
Manuel de montage


Data	Bar:	1	2	3	4	5
080ST	(l/min) (Gal/min)	14.4 3.8	20.4 5.4	25 6.6	29 7.7	32.3 8.5
	Max. 65°C, 150°F					

VR161:
VR161K: 7 l/min - 1.85 Gal/min (Cal Green)
VR161D: 9 l/min - 2.5 Gal/min (USA Standard)
VR161F: 14 l/min - 3.7 Gal/min


 VR161K  VR161D  VR161F






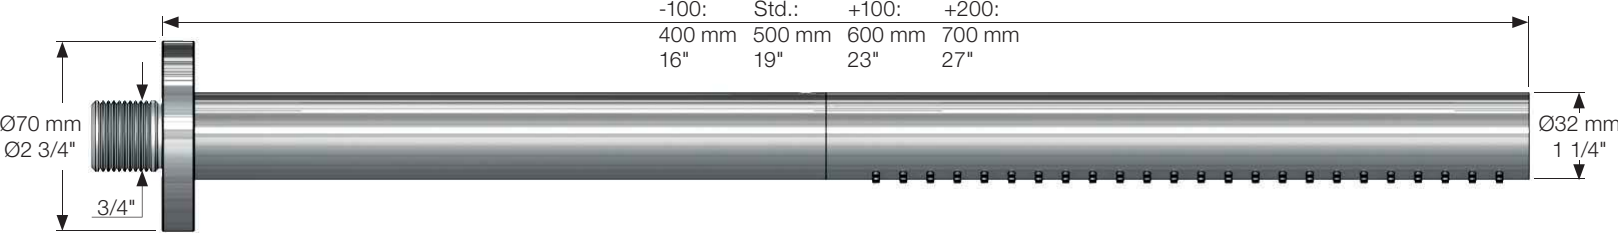


1

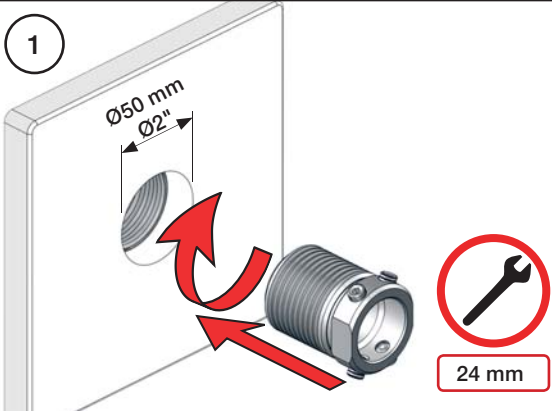


2

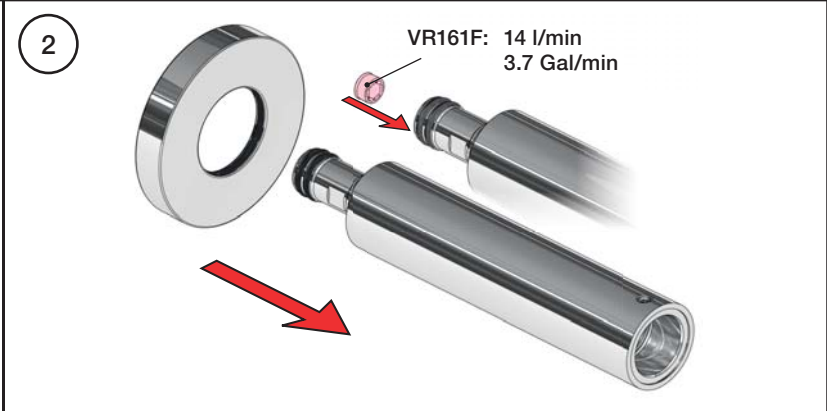


3

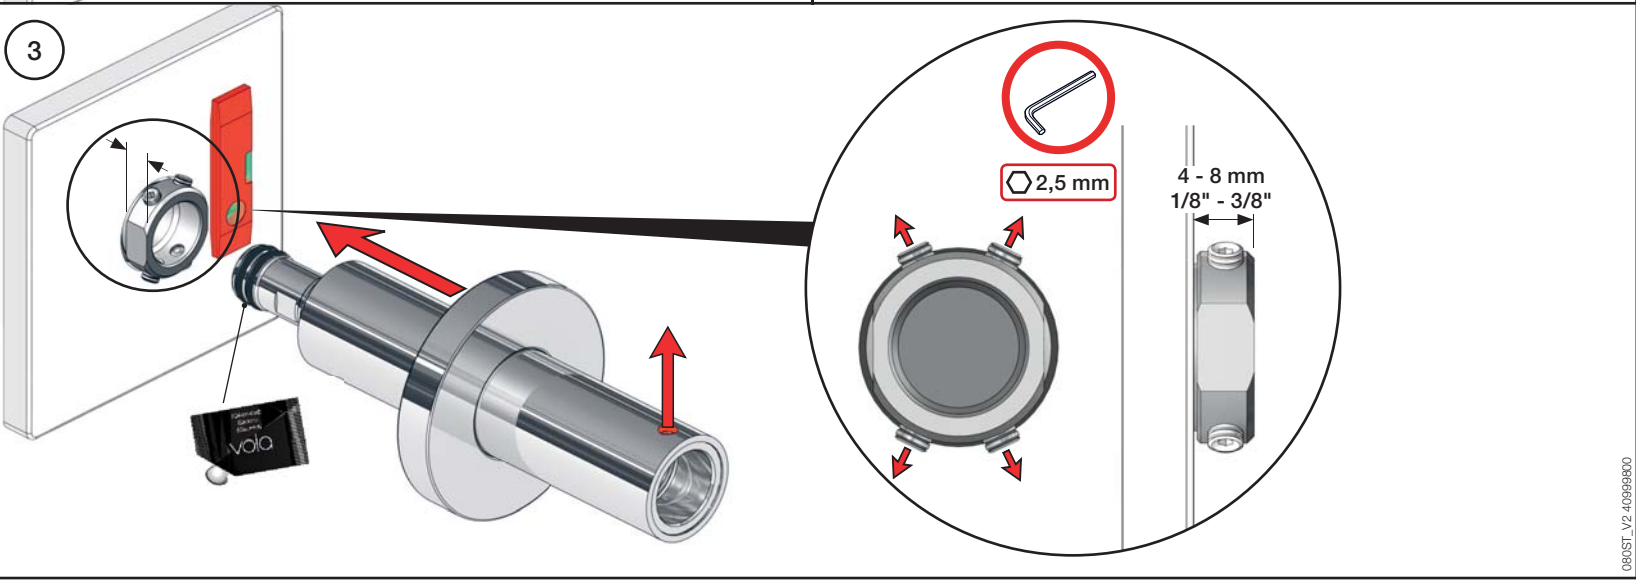


3

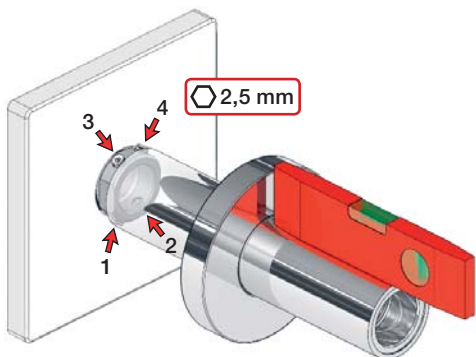


4

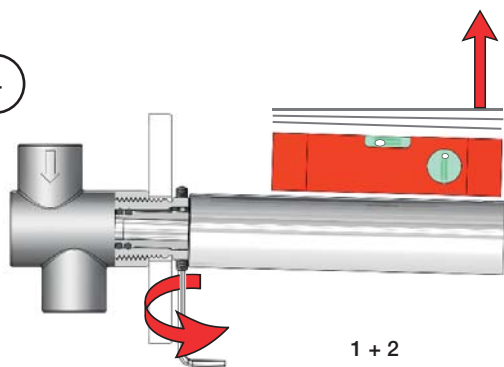

5

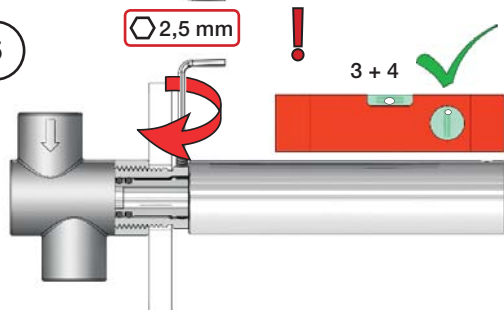


6

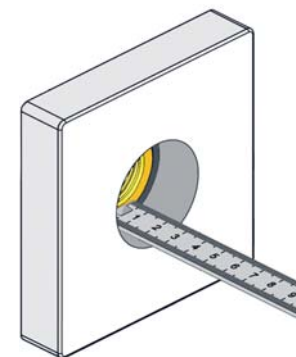Extension
VerlängerungForlængerdele
FörlängningVerlengstukken
Modification

		VR648:
Tiles: Fliesen: Fliser: Fliser: Tegels: Car- reaux:	7 - 19 mm	Standard
	17 - 28 mm	VR648+10
	27 - 38 mm	VR648+20
	37 - 48 mm	VR648+30
	47 - 58 mm	VR648+40
	57 - 68 mm	VR648+50

VR648+

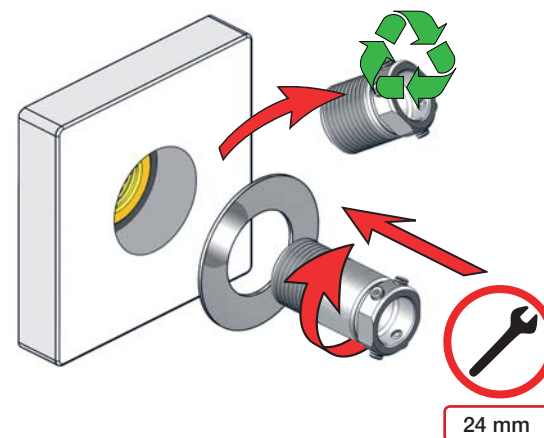

24 mm