Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	sources					
Supplier's name or trade mark: Scan Products						
Supplier's address: Scan Products, Saltebakken 29, 9900 Frederikshavn, DK						
Model identifier: Lucianna Square CCT - 14W						
Type of light so	urce:					
Lighting technology used:		LED	Non-directional or directional:	DLS		
Light source cap-type		LED				
(or other electric interface)						
Mains or non-mains:		MLS	Connected light source (CLS):	No		
Colour-tuneable	e light source:	No	Envelope:	-		
High luminance	light source:	No				
Anti-glare shield:		No	Dimmable:	No		
Product parameters						
Parameter		Value	Parameter	Value		
		General product p	T			
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		14	Energy efficiency class	F		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 250 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000		
On-mode power (P _{on}), expressed in W		14,3	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	96		
Outer dimen-	Height	60	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	600 85	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,437 0,404		
Parameters for directional light sources:					
Peak luminous intensity (cd)	228	Beam angle in degrees, or the range of beam angles that can be set	170		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	96	Survival factor	1,00		
the lumen maintenance factor	0,90				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0		

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

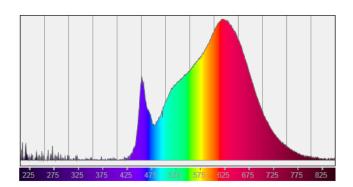

Model placed on the Union market from 07/08/2024



EPREL registration number: 1998650 https://eprel.ec.europa.eu/qr/19

98650

Supplier: Scan Products D T ApS (Manufacturer) Website: www.scan-products.com

Customer care service:

Name: Scan Products Website:

Email: Info@scan-products.dk Phone: +45 7462 6400

Address:

Saltebakken 29 9900 Frederikshavn

Denmark