

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Dansani

Supplier's address: Dansani, Finlandsvej 8, 6100 Haderslev, DK

Model identifier: 93421 Panorama 120 - 01.2023

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	No cap-type		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters


Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		11	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 569 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2100...6500
On-mode power (P_{on}), expressed in W		11,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	1 197	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	8		
	Depth	2		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,313 0,331	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	76	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

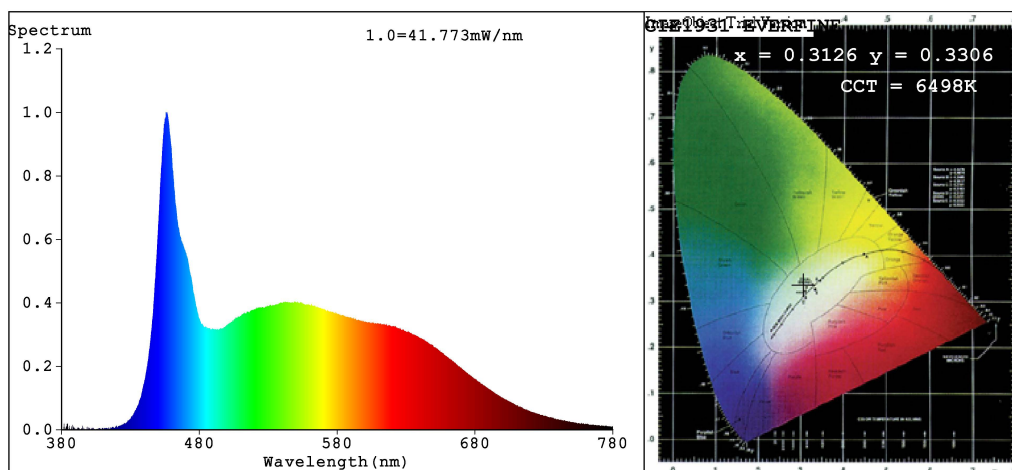

Color Parameters:

Chromaticity Coordinate: $x=0.3126$ $y=0.3306$ $u'=0.1972$ $v'=0.4692$
 CCT=6498K(Duv=0.0041) Dominant WL:Ld =490.0nm Purity=7.2%
 Ratio:R=15.0% G=77.7% B=7.3% Peak WL:Lp=456.4nm FWHM=24.8nm
 Render Index:Ra=91.8
 R1 =94 R2 =99 R3 =96 R4 =85 R5 =90 R6 =94 R7 =89
 R8 =86 R9 =76 R10=98 R11=87 R12=63 R13=97 R14=98 R15=91

Photo Parameters:

Flux = 1569 lm Eff. : 141.32 lm/W Fe = 4.018 W

Electrical parameters:


V = 12.000 V I = 0.9251 A P = 11.10 W PF = 1.000

LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 432 ms Ip = 42050 (64%)

Model:MLE12T-A-6500K-LED(288PCS)	Number:10
Tester:ZW	Date:2022-01-18
Temperature:25.3Deg	Humidity:65.0%
Manufacturer:GB	Remarks:SE001343

Model placed on the Union market from 01/01/2023



EPREL registration number: 1306265

<https://eprel.ec.europa.eu/qr/1306265>

Supplier: Dansani A/S (Manufacturer)

Website:

Customer care service:

Name: Dansani

Website: www.dansani.dk

Email: sba@dansani.dk

Phone: +4523829794

Address:

Finlandsvej 8
6100 Haderslev
Denmark