

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Dansani

Supplier's address: Dansani, Finlandsvej 8, 6100 Haderslev, DK

Model identifier: 190304711 LED 01.01.2023

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	No cap-type		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 654 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2100...2650
On-mode power (P_{on}), expressed in W	13,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,314 0,331	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	82	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

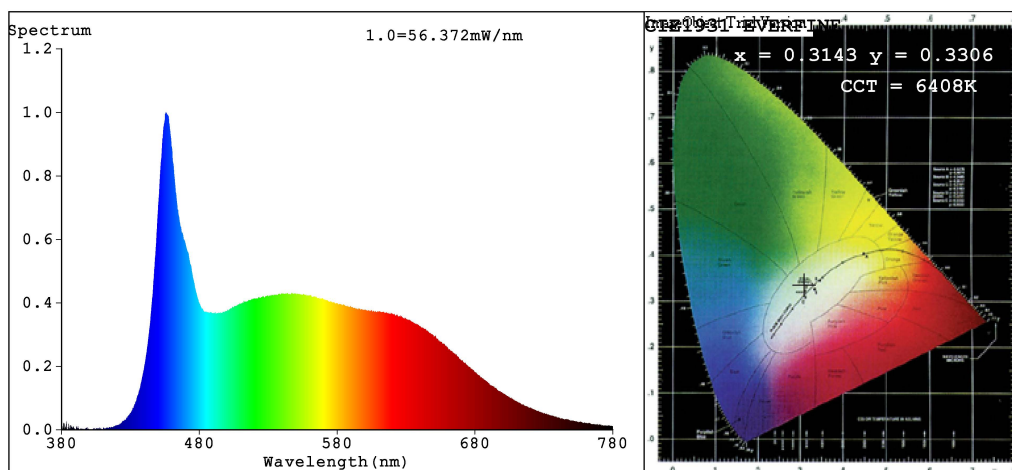

Color Parameters:

Chromaticity Coordinate: $x=0.3143$ $y=0.3306$ $u'=0.1984$ $v'=0.4694$

CCT=6408K(Duv=0.0032) Dominant WL:Ld =489.8nm Purity=6.6%

Ratio:R=15.4% G=77.2% B=7.4% Peak WL:Lp=455.3nm FWHM=27.3nm

Render Index:Ra=92.6

R1 =95 R2 =98 R3 =96 R4 =87 R5 =92 R6 =95 R7 =90

R8 =88 R9 =82 R10=98 R11=90 R12=67 R13=99 R14=98 R15=92

Photo Parameters:

Flux = 1654 lm Eff. : 122.64 lm/W Fe = 5.975 W

Electrical parameters:

V = 12.000 V I = 1.124 A P = 13.49 W PF = 1.000

LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 191 ms Ip = 43847 (67%)

Model:LPP-160MW-6500K-LED(192PCS) Number:12
 Tester:ZW Date:2022-07-07
 Temperature:25.3Deg Humidity:65.0%
 Manufacturer:GB Remarks:SE001979

Model placed on the Union market from 01/01/2023



EPREL registration number: 1597391

<https://eprel.ec.europa.eu/qr/1597391>

Supplier: Dansani A/S (Manufacturer)

Website:

Customer care service:

Name: Dansani

Website: www.dansani.dk

Email: sba@dansani.dk

Phone: +4523829794

Address:

Finlandsvej 8
6100 Haderslev
Denmark