

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: e3light

Supplier's address: Compliance Department, Moegelgaardsvej 19, 8520 Lystrup, DK

Model identifier: 0141020722

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Skinnespot		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	722 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800...3000
On-mode power (P_{on}), expressed in W	11,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	110	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	62	
	Depth	62	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,441 0,403
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 293	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	76	Survival factor	0,50
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.-' : not applicable;

(b)'.-' : not applicable;

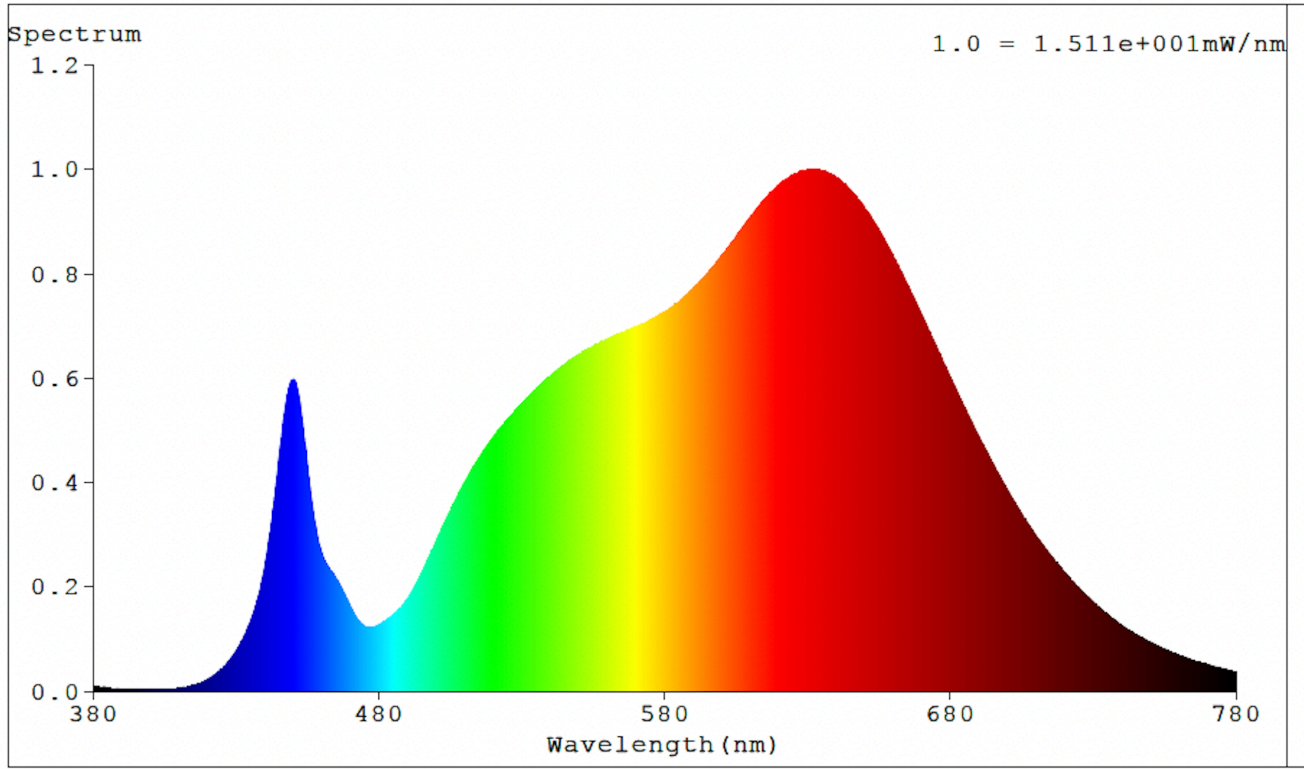

Model placed on the Union market from 01/04/2024



EPREL registration number: 1909865

<https://eprel.ec.europa.eu/qr/1909865>

Supplier: e3light Aps (Importer)

Website:

Customer care service:

Name: Compliance Department

Website:

Email: sales@e3light.com

Phone: 8777 6688

Address:

Moegelgaardsvej 19
8520 Lystrup
Denmark