



<http://itw.nu/gr/kp0jomr9>

Technical drawing of a rectangular plate with dimensions and features. The overall dimensions are 60 mm in width and 90 mm in height. The width is divided into four segments: 10 mm, 20 mm, 20 mm, and 10 mm. The height is divided into five segments: 10 mm, 20 mm, 20 mm, 20 mm, and 10 mm. The plate has a central horizontal slot with a width of 25 mm and a height of 5 mm. There are four circular holes, each with a diameter of 5 mm (Ø5), located at the corners. The holes are numbered 1, 2, 3, and 4. The plate also has two semi-circular notches at the bottom corners, each with a radius of 17.5 mm. The bottom edge has a total width of 65 mm, with a 2.5 mm gap between the notches and a 2.5 mm gap between the notches and the right edge. The right edge has a total height of 65 mm, with a 2.5 mm gap between the notches and a 2.5 mm gap between the notches and the bottom edge.


Side 1 af 3

Vinkelbeslag P2 - 12




Regningsmæssig bæreevne i kN pr. samling:

Normal sikkerhedsklasse - Anvendelsesklasse 1 og 2

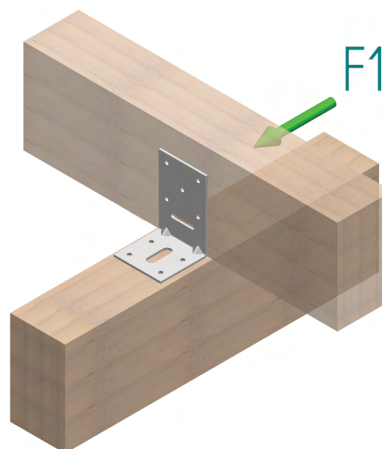


Beslagsøm 4,0 x 40 [Søm placering]	Antal søm [1 beslag]	Lastgruppe	F1 [kN]
1,2,3,4,5 / 6,7,8,9	1 x 9	Kar.	7,54
		P-last	3,35
		L-last	3,91
		M-last	4,47
		S-last	5,03
		Hast	6,14




Anvendelse:

- * Samling af krydsende bjælker
- * Som konsol
- * Samling mellem træ og rem
- * Samling i bjælke/søjlesamlinger

Anvendelse med hulbånd

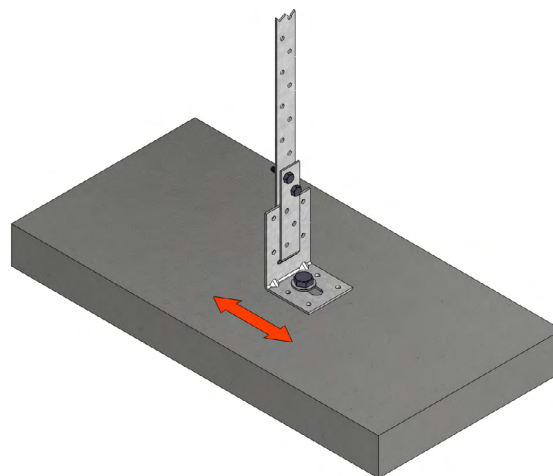


Anvendelse træ på træ

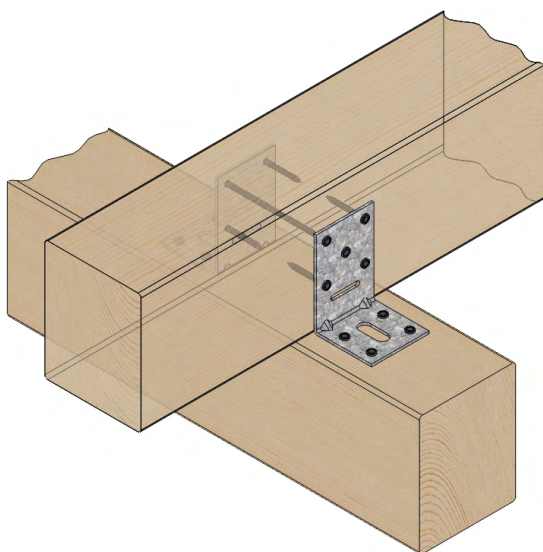

Anvend beslaget således, at den korte flig placeres på den bærende bjælke.

Anvendelse træ på beton

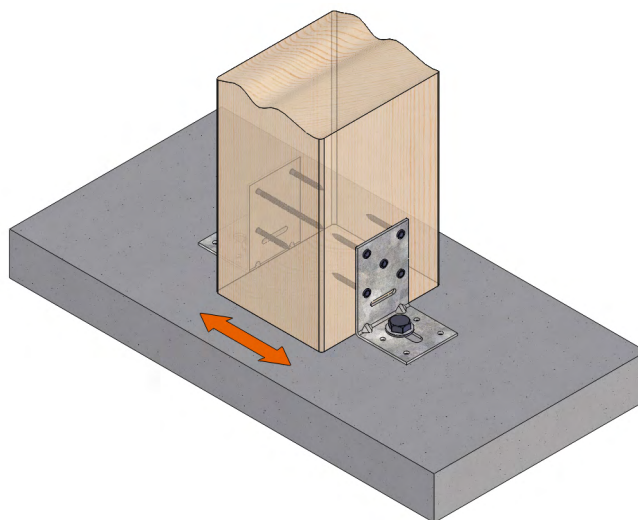

Anvend beslaget således, at den korte flig placeres på betonen.

Beslaget generelt:

- * Er fremstillet med Ø5 mm huller for befæstelse med 5 mm beslagskruer / 4 mm beslagsøm, samt Ø11 mm boltehuller for 10 mm franske skruer eller bolte.
- * Pregalvaniseret stål med 20 µm for lang holdbarhed.
- * Ribbeforstærkning sikrer forøget styrke i beslaget.
- * Søm- og aflangt boltehuller ved bukkelinie sikrer optimal kraftoverførsel.
- * CE-mærket sikrer dokumenteret bæreevne.
- * Til beskyttet udendørs brug.