




Dimensionsgrænser: d: 4,2 mm - 5,3 mm
L: 30 mm - 60 mm
Kærv: TX 20 - TX 25
Materiale: lht. EN 14592
C1022
Overfladebehandling: DURAMAX 1000
Anvendelsesklasse: 1 - 2 - 3

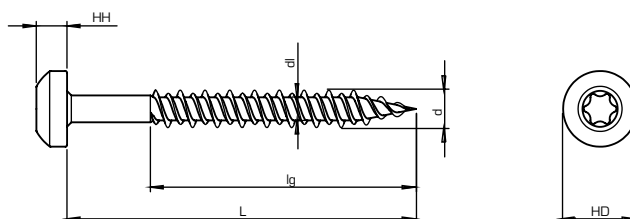

Sortimentsoversigt

Nominal diameter d [mm]	Længde L [mm]	Gevind-længde lg [mm]	Kærv	Kerne- diameter dl [mm]	Hoved- diameter HD [mm]	Hoved-højde HH [mm]	Antal	ITW nr.	DB nr.
4,2	30	26	TX 20	2,6	8,6	3,2	200	138298	5357723
4,2	45	41	TX 20	2,6	8,6	3,2	200	138299	5357724
4,2	60	50	TX 20	2,6	8,6	3,2	200	138300	5357725

Montage uden nylondybel

Forboring

BEMU®-FLEX Ø 4,2: Beton Ø 3,5 mm / Mursten Ø 3,0 mm

BEMU®-FLEX Ø 5,3: Beton Ø 4,5 mm / Mursten Ø 4,0 mm

Letbeton/Træ: Ingen forboring