

SKOT LED UPGRADE KIT

Skot LED Upgrade Kit - 10000150629

The fixture is available with two types of distribution: symmetric or half shaded. The half shaded is only recommended for wall mounting. The opal diffuser creates a soft light distribution. For higher efficiency the clear version can be selected. The LED-upgrade kit (also referred to as LED Retrofit kit) allows you to replace the old electrical components with a complete modern new LED unit, while retaining the original fixture.



Product info

Information

LED Upgrade Kit available for updating conventional Skot variants with LED. There may be anniversary or limited editions where this is not compatible. Please contact Louis Poulsen for more information. Two variants: LED Upgrade Kit available for variants with full die cast aluminium housing or variants with aluminium housing with plastic insert.

Mounting

Two variants: LED Upgrade Kit available for variants with full die cast aluminium housing or variants with aluminium housing with plastic insert. Looping approved for LED Upgrade kit with full aluminium housing: max. 5x2.5mm².

Finish

White powder coated.

Materials

LED console: aluminium sheet

Sizes and weights

width x Height x Length (mm) | 239 x 239 x 155 Max 0.5 kg

Class

Ingress protection IP66. Electric shock protection II w/o ground. IK10.

Light source

LED 3000K 8.1W

Lumen: 521

Information

LED Upgrade Kit available for updating conventional Skot variants with LED. There may be anniversary or limited editions where this is not compatible. Please contact Louis Poulsen for more information. Two variants: LED Upgrade Kit available for variants with full die cast aluminium housing or variants with aluminium housing with plastic insert.




Related products



Skot Ceiling Lamp




Skot Wall Lamp




Skot Bollard

Light distribution diagrams


Cartesian

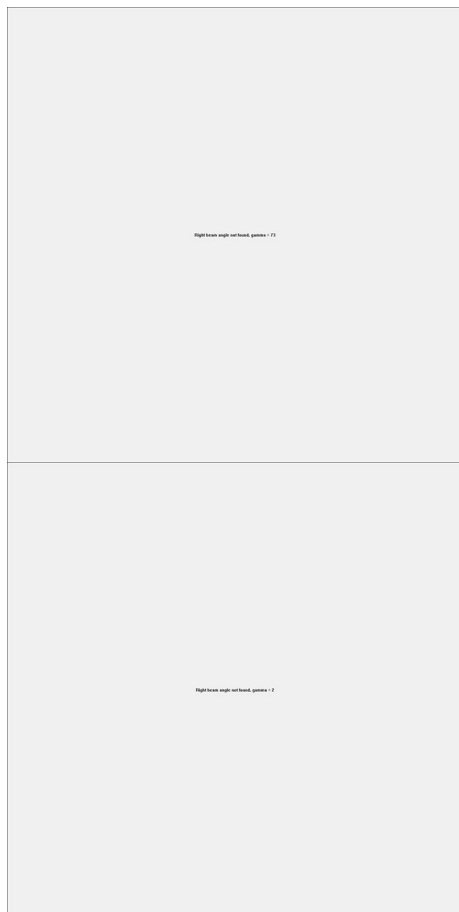

Isolux

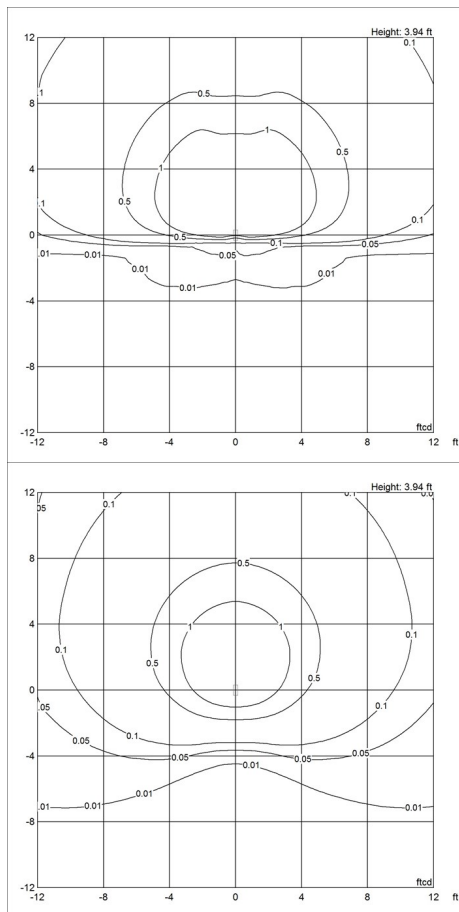

Polar

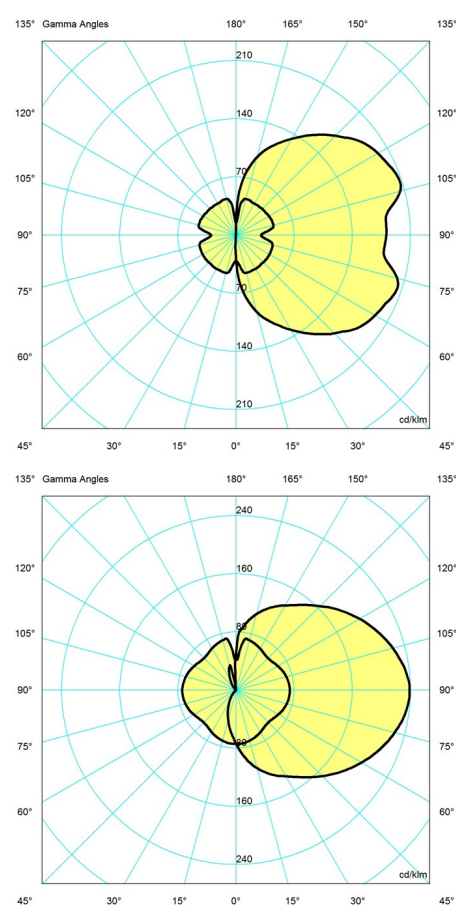

Data specifications

Colour	White	Length	155
Width	239	Height	239
IP class	66	IK class	10
Class	II	Net Weight	0.5
Wind Load (m2)	-	Standby (W)	-
Power Factor (P = 100 % / P = 50 %)	-	Inrush Current	15 A @ 230 V

Skot LED Upgrade Kit

Light source	LED 3000K 8.1W
CRI	80
Lumen	521
Efficacy	64
Min. Dim Level (%)	-
BUG Rating	B0 U3 G1
Driver life	-

Kelvin	3000
SDCM	3
Watt	8.1
Light control	-
Surge Protection	-
L80B50 (hours)	>55.000