

Category	Bulkheads
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Outdoor, Retail
Specification	Architectural

Mercurial

Mercurial 1 IP54 2CCT Multi Wattage Silver DALI Self-Test Emergency

Code: AMER1/1/S/DD3/SM3



PRODUCT FEATURES


- Utility LED wall/ceiling luminaire suitable for education and commercial applications and ancillary areas
- Corridor function options available for effective reduction in energy consumption
- Clip in gear tray ensures quick installation
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire (AMER1/1/** only)
- Side conduit entry covers retain sleek appearance when not in use

GENERAL INFORMATION

Wattage	20W
Lumens Delivered	1900lm - 2700lm (4000K)
Lm/W	135lm/W (4000K)
Beam Angle	120
CRI	80
CCT	3000/4000K
Input	220-240V
Operating Temp	5°C - 40°C
SDCM	3
Product Weight without Packaging	1.24 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	Silver
IP Rating	IP54
IK Rating	IK08
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Wall
Lumen Depreciation	L70 80,000h
Warranty (Years)	7
CE Mark	Yes
Diameter	370 mm
Emergency Output Duration	3 Hr

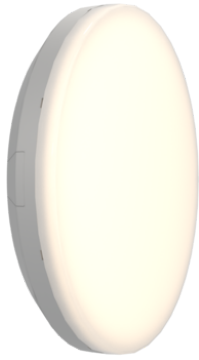

Category	Bulkheads
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Outdoor, Retail
Specification	Architectural

Mercurial

Mercurial 1 IP54 2CCT Multi Wattage Silver DALI Self-Test Emergency

Code: AMER1/1/S/DD3/SM3

